REDLANDS AVENUE WEST INDUSTRIAL PROJECT AIR QUALITY, GLOBAL CLIMATE CHANGE, HRA, AND ENERGY IMPACT ANALYSIS

City of Perris
August 26, 2021
(Revised July 24, 2023)

Traffic Engineering ● Transportation Planning ● Parking ● Noise & Vibration
Air Quality ● Global Climate Change ● Health Risk Assessment

REDLANDS AVENUE WEST INDUSTRIAL PROJECT AIR QUALITY, GLOBAL CLIMATE CHANGE, HRA, AND ENERGY IMPACT ANALYSIS

City of Perris
August 26, 2021
(Revised July 24, 2023)

prepared by
Katie Wilson, MS
Catherine Howe, MS

GANDDINI GROUP INC.
555 Park Center Drive, Suite 225
Santa Ana, California 92705
(714) 795-3100 | ganddini.com

Project No. 19370

TABLE OF CONTENTS

APPENDICES

LIST OF TABLES

LIST OF FIGURES

EXECUTIVE SUMMARY

The purpose of this air quality, global climate change, health risk assessment and energy impact analysis is to provide an assessment of the impacts resulting from development of the proposed Redlands Avenue West Industrial project and to identify measures that may be necessary to reduce potentially significant impacts.

Construction-Source Emissions

Project construction-source emissions would not exceed applicable regional thresholds of significance established by the South Coast Air Quality Management District (SCAQMD). For localized emissions, the project will not exceed applicable Localized Significance Thresholds (LSTs) established by the SCAQMD.

Project construction-source emissions would not conflict with the Basin Air Quality Management Plan (AQMP). As discussed herein, the project will comply with all applicable SCAQMD construction-source emission reduction rules and guidelines. Project construction source emissions would not cause or substantively contribute to violation of the California Ambient Air Quality Standards (CAAQS) or National Ambient Air Quality Standards (NAAQS).

Given the temporary and short-term construction schedule, the project would not result in a long-term (i.e., lifetime or 30-year) exposure to TACs as a result of project construction. Furthermore, construction-based particulate matter (PM) emissions (including diesel exhaust emissions) do not exceed any local or regional thresholds. Therefore, impacts from TACs during construction would be less than significant.

Established requirements addressing construction equipment operations, and construction material use, storage, and disposal requirements act to minimize odor impacts that may result from construction activities. Moreover, construction-source odor emissions would be temporary, short-term, and intermittent in nature and would not result in persistent impacts that would affect substantial numbers of people. Potential construction-source odor impacts are therefore considered less than significant.

Operational-Source Emissions

Project operational-sourced emissions would not exceed applicable regional thresholds of significance established by the SCAQMD. Project operational-source emissions would not result in or cause a significant localized air quality or toxic air contaminant (TAC) impacts as discussed in the Operations-Related Local Air Quality Impacts section of this report. Additionally, project-related trips will not cause or result in CO concentrations exceeding applicable state and/or federal standards (CO “hotspots). The Diesel Emissions Health Risk Assessment conducted for this project showed that DPM emissions from project-related truck trips and on-site emissions source will not cause a significantly elevated cancer risk or significant non-cancer-related health risk to nearby receptors. Project operational-source emissions would therefore not adversely affect sensitive receptors within the vicinity of the project.

Project operational-source emissions would not conflict with the Basin Air Quality Management Plan (AQMP). The project's emissions meet SCAQMD regional thresholds and will not result in a significant cumulative impact. The project does not propose any such uses or activities that would result in potentially significant operational-source odor impacts. Potential operational-source odor impacts are therefore considered less than significant.

Greenhouse Gases

Project-related GHG emissions would not exceed the SCAQMD screening threshold of 10,000 MTCO2e per year for industrial uses.

Furthermore, the project's GHG emissions would not exceed the SCAQMD screening threshold (based on EO S-3-05). The project would not conflict with the goals of AB-32, SB-32, or the City of Perris CAP; therefore, the project would not conflict with an applicable plan, policy or regulation of an agency adopted for the purpose of reducing the emissions of greenhouse gases and impacts are considered to be less than significant.

Energy

For new development such as that proposed by the Redlands Avenue West Industrial project, compliance with California Building Standards Code Title 24 energy efficiency requirements (CALGreen), are considered demonstrable evidence of efficient use of energy. As discussed below, the project would provide for, and promote, energy efficiencies required under other applicable federal and State of California standards and regulations, and in so doing would meet or exceed all California Building Standards Code Title 24 standards. Moreover, energy consumed by the project's operation is calculated to be comparable to, or less than, energy consumed by other industrial uses of similar scale and intensity that are constructed and operating in California. On this basis, the project would not result in the inefficient, wasteful, or unnecessary consumption of energy. Impacts are considered to be less than significant.

1. INTRODUCTION

This section describes the purpose of this air quality, global climate change, health risk assessment, and energy impact analysis, project location, proposed development, and study area. Figure 1 shows the project location map and Figure 2 illustrates the project site plan.

PURPOSE AND OBJECTIVES

This study was performed to address the possibility of regional/local air quality impacts and global climate change impacts, from project related air emissions. The objectives of the study include:

- documentation of the atmospheric setting
- discussion of criteria pollutants and greenhouse gases
- discussion of the air quality and global climate change regulatory framework
- analysis of the construction related air quality and greenhouse gas emissions
- analysis of the operations related air quality and greenhouse gas emissions
- discussion of the health risk impacts
- analysis of the conformity of the proposed project with the SCAQMD AQMP
- analysis of the project's energy use during construction and operation
- recommendations for mitigation measures

The City of Perris is the lead agency for this air quality and greenhouse gas analysis, in accordance with the California Environmental Quality Act authorizing legislation. Although this is a technical report, every effort has been made to write the report clearly and concisely. To assist the reader with terms unique to air quality and global climate change, a definition of terms has been provided in Appendix A.

PROJECT LOCATION

The approximately 20.14-acre project site is located along the west side of Redlands Avenue, south of Rider Street, and north of Placentia Avenue in the City of Perris, California. The site is currently vacant and located within the Perris Valley Commerce Center Specific Plan. A vicinity map showing the project location is provided on Figure 1.

PROJECT DESCRIPTION

The proposed project involves construction of a 301,101 square foot warehouse building including a 4,000 square foot mezzanine. The project site is proposed to provide three access driveways on Redlands Avenue. The north and south project driveways will primarily serve truck traffic and the center driveway will serve passenger cars. The proposed project is anticipated to be constructed and fully operational by year 2025. Figure 2 illustrates the proposed site plan.

PHASING AND TIMING

The proposed project is anticipated to be operational in 2025. The project is anticipated to be built in one phase with project construction anticipated to start no sooner than the beginning of July 2024 with completion estimated by the beginning of April 2025. Even if construction was to occur any time after the respective dates, the analysis represents "worst-case" since emission factors for construction decrease as time passes and the analysis year increases due to emission regulations becoming more stringent.[1]

[1] As shown in the California Emissions Estimator Model (CalEEMod) User's Guide Version 2020.4.0, Section 4.3.2 "OFFROAD Equipment" as the analysis year increases, emission factors for the same equipment pieces decrease due to the natural turnover of older equipment being replaced by newer less polluting equipment and new regulatory requirements.

Sensitive Receptors in Project Vicinity

Those who are sensitive to air pollution include children, the elderly, and persons with preexisting respiratory or cardiovascular illness. For purposes of CEQA, the SCAQMD considers a sensitive receptor to be a location where a sensitive individual could remain for 24 hours, such as residences, hospitals, or convalescent facilities (South Coast Air Quality Management District 2008). Commercial and industrial facilities are not included in the definition because employees do not typically remain on-site for 24 hours.

The nearest sensitive receptors to the project site include the existing single-family residential dwelling units and mobile home park located adjacent to the west and the single-family residential uses located approximately 323 feet southeast (across Redlands Avenue), and the single-family residential uses located approximately 780 feet north (north of Rider Street) of the project site.

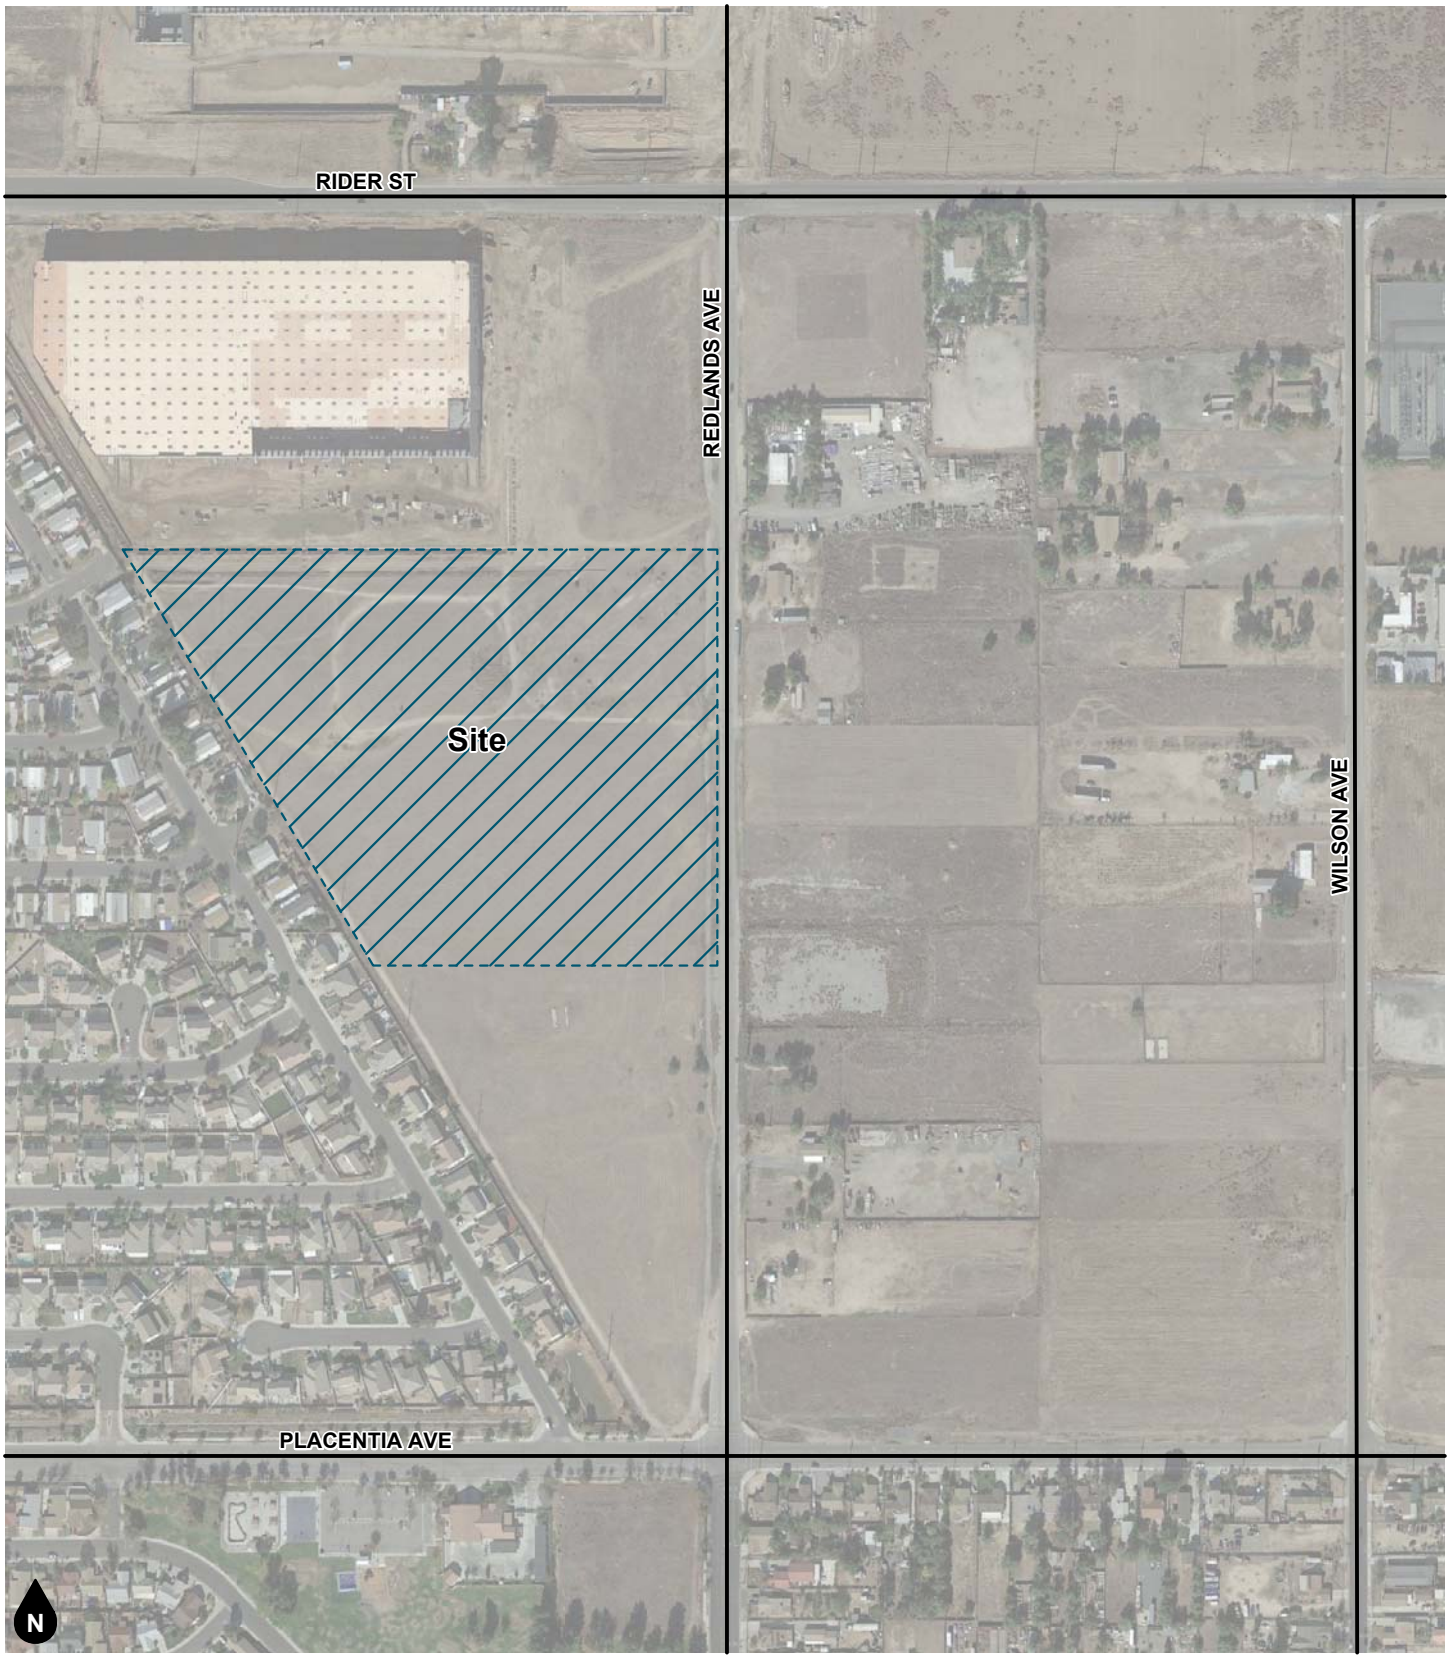

Figure 1
Project Location Map

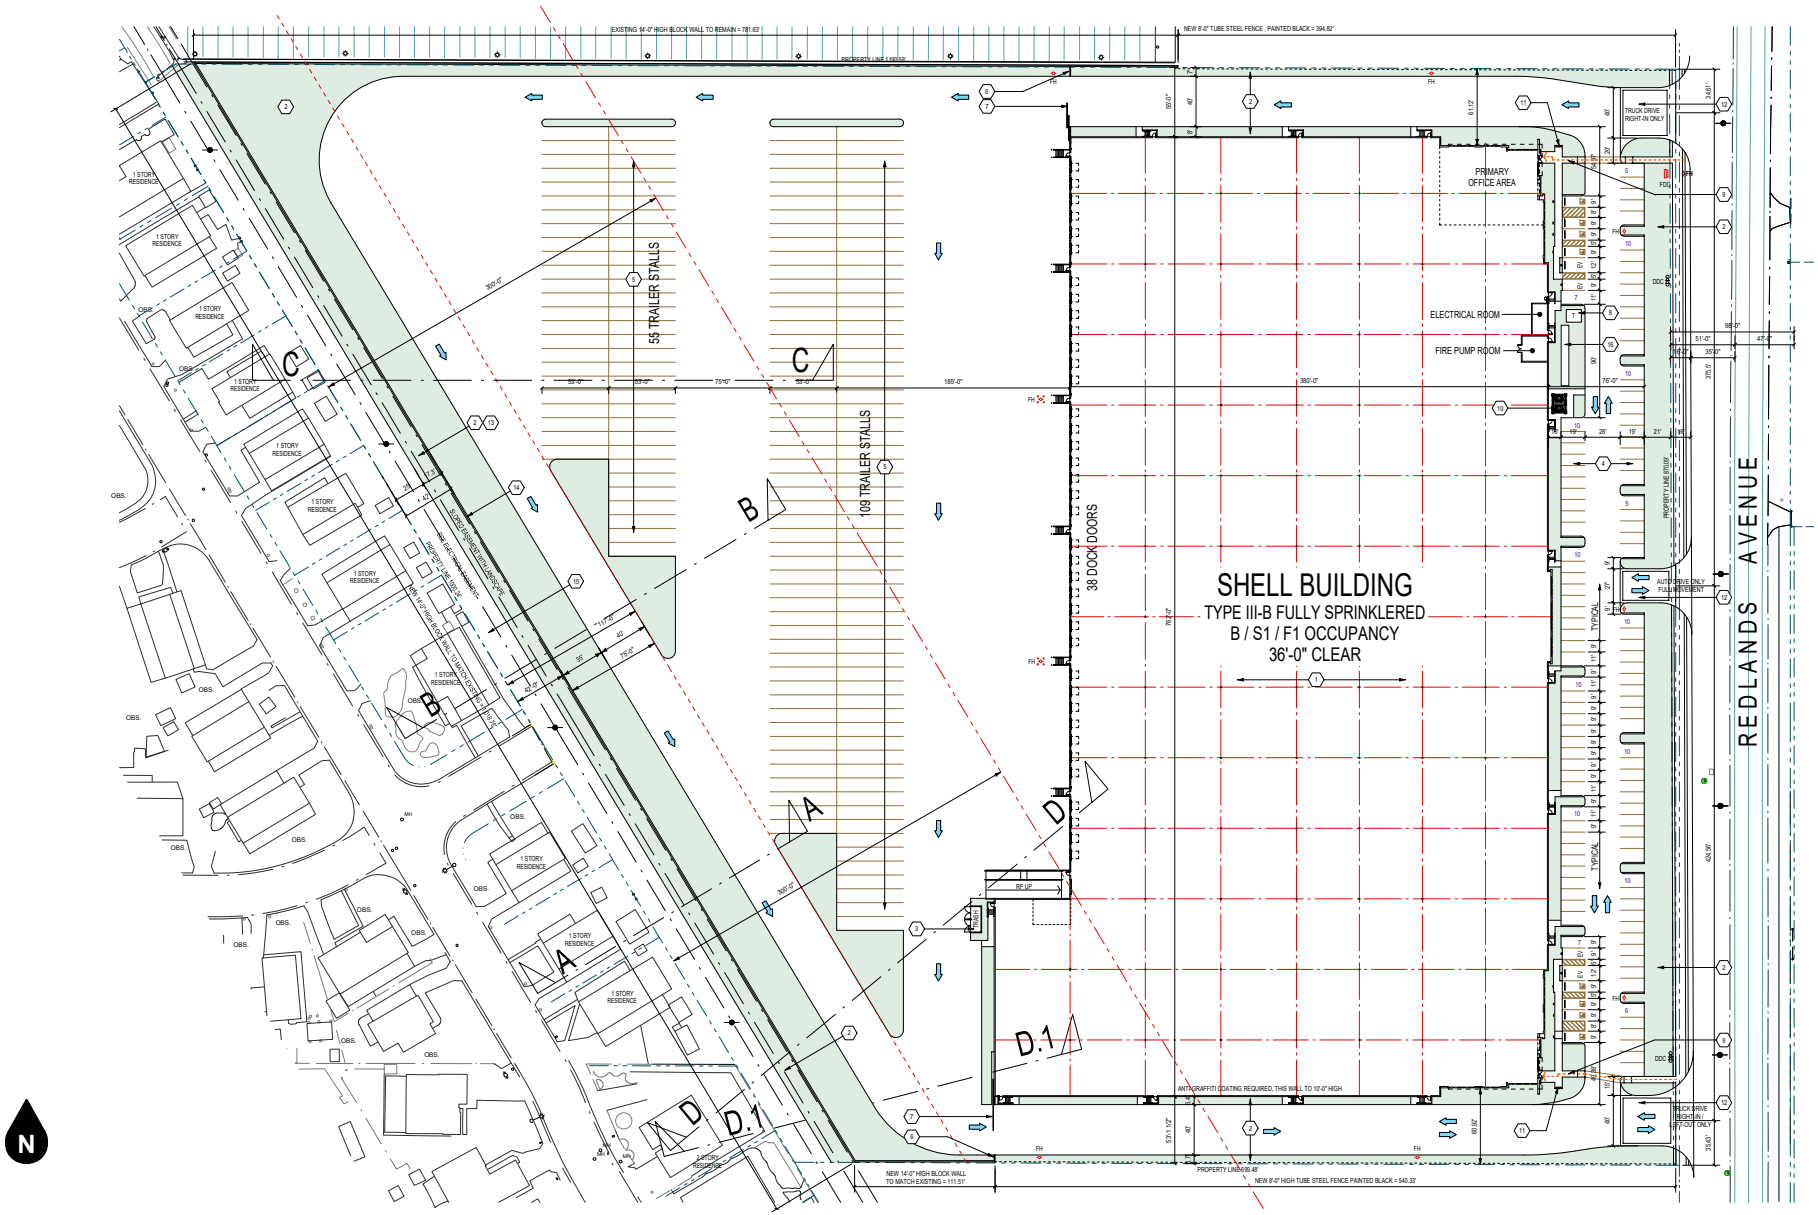

Figure 2
Site Plan

2. AIR QUALITY ANALYSIS

EXISTING AIR QUALITY CONDITIONS

Local Air Quality

The project is located within the City of Perris in the portion of Riverside County that lies within the South Coast Air Basin (Basin). The project area is under the jurisdiction of the South Coast Air Quality Management District (SCAQMD). The Basin is a 6,600-square-mile coastal plain bounded by the Pacific Ocean to the southwest and the San Gabriel, San Bernardino, and San Jacinto Mountains to the north and east. The Basin includes the non-desert portions of Los Angeles, Riverside, and San Bernardino counties, and all of Orange County.

The ambient concentrations of air pollutants are determined by the amount of emissions released by sources and the atmosphere's ability to transport and dilute such emissions. Natural factors that affect transport and dilution include terrain, wind, atmospheric stability, and sunlight. Therefore, existing air quality conditions in the area are determined by such natural factors as topography, meteorology, and climate, in addition to the amount of emissions released by existing air pollutant sources.

Atmospheric conditions such as wind speed, wind direction, and air temperature gradients interact with the physical features of the landscape to determine the movement and dispersal of air pollutants. The topography and climate of southern California combine to make the Basin an area of high air pollution potential. The Basin is a coastal plain with connecting broad valleys and low hills, bounded by the Pacific Ocean to the west and high mountains around the rest of the perimeter. The general region lies in the semi-permanent high-pressure zone of the eastern Pacific, resulting in a mild climate tempered by cool sea breezes with light average wind speeds.

The usually mild climatological pattern is disrupted occasionally by periods of extremely hot weather, winter storms, or Santa Ana winds. During the summer months, a warm air mass frequently descends over the cool, moist marine layer produced by the interaction between the ocean's surface and the lowest layer of the atmosphere. The warm upper layer forms a cap over the cool marine layer and inhibits the pollutants in the marine layer from dispersing upward. In addition, light winds during the summer further limit ventilation. Furthermore, sunlight triggers the photochemical reactions that produce ozone. The region experiences more days of sunlight than any other major urban area in the nation except Phoenix (SCAQMD, 2007).

The temperature and precipitation levels for the City of Sun City, the closest station with updated data, are shown below in Table 1. Table 1 shows that August is typically the warmest month and December is typically the coolest month. Rainfall in the project area varies considerably in both time and space. Almost all the annual rainfall comes from the fringes of mid-latitude storms from late November to early April, with summers being almost completely dry.

Table 1
Local Monthly Climate Data

Descriptor	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Avg. Max. Temperature	66.7	68.1	71.1	77.2	83.2	91.8	97.6	98.6	93.5	84.2	71.2	66.9
Avg. Min. Temperature	36.3	38.9	41.6	45.1	50.1	54.5	58.6	60.1	57.4	49.3	39.4	35.4
Avg. Total Precipitation (in.)	2.29	3.08	1.95	0.79	0.31	0.07	0.04	0.22	0.1	0.45	0.71	1.33

Source: https://wrcc.dri.edu/cgi-bin/cliMAIN.pl?ca8655
Data from the Sun City, CA station (048655).

Pollutants

Pollutants are generally classified as either criteria pollutants or non-criteria pollutants. Federal ambient air quality standards have been established for criteria pollutants, whereas no ambient standards have been established for non-criteria pollutants. For some criteria pollutants, separate standards have been set for different periods. Most standards have been set to protect public health. For some pollutants, standards have been based on other values (such as protection of crops, protection of materials, or avoidance of nuisance conditions). A summary of federal and state ambient air quality standards is provided in the Regulatory Framework section.

Criteria Pollutants

The criteria pollutants consist of: ozone, nitrogen dioxide, carbon monoxide, sulfur dioxide, lead, and particulate matter. These pollutants can harm your health and the environment, and cause property damage. The Environmental Protection Agency (EPA) calls these pollutants "criteria" air pollutants because it regulates them by developing human health-based and/or environmentally-based criteria for setting permissible levels. The following provides descriptions of each of the criteria pollutants.

Nitrogen Dioxides

Nitrogen Oxides (NOx) is the generic term for a group of highly reactive gases which contain nitrogen and oxygen. While most NOx is colorless and odorless, concentrations of nitrogen dioxide (NO_2) can often be seen as a reddish-brown layer over many urban areas. NOx form when fuel is burned at high temperatures, as in a combustion process. The primary manmade sources of NOx are motor vehicles, electric utilities, and other industrial, commercial, and residential sources that burn fuel. NOx reacts with other pollutants to form, ground-level ozone, nitrate particles, acid aerosols, as well as NO_2, which cause respiratory problems. NOx and the pollutants formed from NOx can be transported over long distances, following the patterns of prevailing winds. Therefore, controlling NOx is often most effective if done from a regional perspective, rather than focusing on the nearest sources.

Ozone

Ozone (O_3) is not usually emitted directly into the air but at ground-level is created by a chemical reaction between NOx and volatile organic compounds (VOC) in the presence of sunlight. Motor vehicle exhaust, industrial emissions, gasoline vapors, chemical solvents as well as natural sources emit NOx and VOC that help form ozone. Ground-level ozone is the primary constituent of smog. Sunlight and hot weather cause ground-level ozone to form with the greatest concentrations usually occurring downwind from urban areas. Ozone is subsequently considered a regional pollutant. Ground-level ozone is a respiratory irritant and an oxidant that increases susceptibility to respiratory infections and can cause substantial damage to vegetation and other materials. Because NOx and VOC are ozone precursors, the health effects associated with ozone are also indirect health effects associated with significant levels of NOx and VOC emissions.

Carbon Monoxide

Carbon monoxide (CO) is a colorless, odorless gas that is formed when carbon in fuel is not burned completely. It is a component of motor vehicle exhaust, which contributes about 56 percent of all CO emissions nationwide. In cities, 85 to 95 percent of all CO emissions may come from motor vehicle exhaust. Other sources of CO emissions include industrial processes (such as metals processing and chemical manufacturing), residential wood burning, and natural sources such as forest fires. Woodstoves, gas stoves, cigarette smoke, and unvented gas and kerosene space heaters are indoor sources of CO. The highest levels of CO in the outside air typically occur during the colder months of the year when inversion conditions are more frequent. The air pollution becomes trapped near the ground beneath a layer of warm air. CO is described as having only a local influence because it dissipates quickly. Since CO concentrations are strongly associated with motor vehicle emissions, high CO concentrations generally occur in the immediate vicinity of roadways with high

traffic volumes and traffic congestion, active parking lots, and in automobile tunnels. Areas adjacent to heavily traveled and congested intersections are particularly susceptible to high CO concentrations.

CO is a public health concern because it combines readily with hemoglobin and thus reduces the amount of oxygen transported in the bloodstream. The health threat from lower levels of CO is most serious for those who suffer from heart disease such as angina, clogged arteries, or congestive heart failure. For a person with heart disease, a single exposure to CO at low levels may cause chest pain and reduce that person's ability to exercise; repeated exposures may contribute to other cardiovascular effects. High levels of CO can affect even healthy people. People who breathe high levels of CO can develop vision problems, reduced ability to work or learn, reduced manual dexterity, and difficulty performing complex tasks. At extremely high levels, CO is poisonous and can cause death.

Sulfur Dioxide

Sulfur Oxide (SOx) gases (including sulfur dioxide [SO2]) are formed when fuel containing sulfur, such as coal and oil is burned, and from the refining of gasoline. SOx dissolves easily in water vapor to form acid and interacts with other gases and particles in the air to form sulfates and other products that can be harmful to people and the environment.

Lead

Lead (Pb) is a metal found naturally in the environment as well as manufactured products. The major sources of lead emissions have historically been motor vehicles and industrial sources. Due to the phase out of leaded gasoline, metal processing is now the primary source of lead emissions to the air. High levels of lead in the air are typically only found near lead smelters, waste incinerators, utilities, and lead-acid battery manufacturers. Exposure of fetuses, infants and children to low levels of lead can adversely affect the development and function of the central nervous system, leading to learning disorders, distractibility, inability to follow simple commands, and lower intelligence quotient. In adults, increased lead levels are associated with increased blood pressure.

Particulate Matter

Particulate matter (PM) is the term for a mixture of solid particles and liquid droplets found in the air. Particulate matter is made up of a number of components including acids (such as nitrates and sulfates), organic chemicals, metals, and soil or dust particles. The size of particles is directly linked to their potential for causing health problems. Particles that are less than 10 micrometers in diameter (PM10) are the particles that generally pass through the throat and nose and enter the lungs. Once inhaled, these particles can affect the heart and lungs and cause serious health effects. Particles that are less than 2.5 micrometers in diameter (PM2.5) have been designated as a subset of PM10 due to their increased negative health impacts and its ability to remain suspended in the air longer and travel further.

Reactive Organic Gases (ROG)

Although not a criteria pollutant, reactive organic gases (ROGs), or volatile organic compounds (VOCs), are defined as any compound of carbon—excluding carbon monoxide, carbon dioxide, carbonic acid, metallic carbides or carbonates, and ammonium carbonate—that participates in atmospheric photochemical reactions. Although there are slight differences in the definition of ROGs and VOCs, the two terms are often used interchangeably. Indoor sources of VOCs include paints, solvents, aerosol sprays, cleansers, tobacco smoke, etc. Outdoor sources of VOCs are from combustion and fuel evaporation. A reduction in VOC emissions reduces certain chemical reactions that contribute to the formulation of ozone. VOCs are transformed into organic aerosols in the atmosphere, which contribute to higher PM10 and lower visibility.

Other Pollutants of Concern

Toxic Air Contaminants

In addition to the above-listed criteria pollutants, toxic air contaminants (TACs) are another group of pollutants of concern. Sources of toxic air contaminants include industrial processes such as petroleum refining and chrome plating operations, commercial operations such as gasoline stations and dry cleaners, and motor vehicle exhaust. Cars and trucks release at least forty different toxic air contaminants. The most important of these toxic air contaminants, in terms of health risk, are diesel particulates, benzene, formaldehyde, 1,3-butadiene, and acetaldehyde. Public exposure to toxic air contaminants can result from emissions from normal operations as well as from accidental releases. Health effects of toxic air contaminants include cancer, birth defects, neurological damage, and death.

Toxic air contaminants are less pervasive in the urban atmosphere than criteria air pollutants, however they are linked to short-term (acute) or long-term (chronic or carcinogenic) adverse human health effects. There are hundreds of different types of toxic air contaminants with varying degrees of toxicity. Sources of toxic air contaminants include industrial processes, commercial operations (e.g., gasoline stations and dry cleaners), and motor vehicle exhaust.

According to the 2013 California Almanac of Emissions and Air Quality, the majority of the estimated health risk from toxic air contaminants can be attributed to relatively few compounds, the most important of which is diesel particulate matter (DPM). Diesel particulate matter is a subset of PM2.5 because the size of diesel particles are typically 2.5 microns and smaller. The identification of diesel particulate matter as a toxic air contaminant in 1998 led the California Air Resources Board (CARB) to adopt the Risk Reduction Plan to Reduce Particulate Matter Emissions from Diesel-fueled Engines and Vehicles in September 2000. The plan's goals are a 75-percent reduction in diesel particulate matter by 2010 and an 85-percent reduction by 2020 from the 2000 baseline. Diesel engines emit a complex mixture of air pollutants, composed of gaseous and solid material. The visible emissions in diesel exhaust are known as particulate matter or PM, which includes carbon particles or "soot". Diesel exhaust also contains a variety of harmful gases and over 40 other cancer-causing substances. California's identification of diesel particulate matter as a toxic air contaminant was based on its potential to cause cancer, premature deaths, and other health problems. Exposure to diesel particulate matter is a health hazard, particularly to children whose lungs are still developing and the elderly who may have other serious health problems. Overall, diesel engine emissions are responsible for the majority of California's potential airborne cancer risk from combustion sources.

According to the SCAQMD's MATES-V study, the project area has an estimated multi-pathway cancer risk of 317 in a million and an inhalation pathway cancer risk of 291 in one million. In comparison the average multi-pathway cancer risk for the South Coast Air Basin portion of Riverside County is 332 in one million and the inhalation risk is 313 in a million chance of cancer.

Asbestos

Asbestos is listed as a TAC by the ARB and as a Hazardous Air Pollutant by the EPA. Asbestos occurs naturally in mineral formations and crushing or breaking these rocks, through construction or other means, can release asbestiform fibers into the air. Asbestos emissions can result from the sale or use of asbestos-containing materials, road surfacing with such materials, grading activities, and surface mining. The risk of disease is dependent upon the intensity and duration of exposure. When inhaled, asbestos fibers may remain in the lungs and with time may be linked to such diseases as asbestosis, lung cancer, and mesothelioma. Naturally occurring asbestos is not present in Riverside County. The nearest likely locations of naturally occurring asbestos, as identified in the General Location Guide for Ultramafic Rocks in California prepared by the California Division of Mines and Geology, is located at Asbestos Mountain in the San Jacinto Mountains, approximately 45 miles southwest of the project site. Due to the distance to the nearest natural occurrences of asbestos, the project site is not likely to contain asbestos.

REGULATORY SETTING

The proposed project is addressed through the efforts of various international, federal, state, regional, and local government agencies. These agencies work jointly, as well as individually, to improve air quality through legislation, regulations, planning, policy-making, education, and a variety of programs. The agencies responsible for improving the air quality are discussed below.

Federal – United States Environmental Protection Agency

The United States Environmental Protection Agency (EPA) is responsible for setting and enforcing the National Ambient Air Quality Standards (NAAQS) for atmospheric pollutants. It regulates emission sources that are under the exclusive authority of the federal government, such as aircraft, ships, and certain locomotives. The National Ambient Air Quality Standards (NAAQS) pollutants were identified using medical evidence and are shown below in Table 2.

The EPA and the California Air Resource Board (CARB) designate air basins where ambient air quality standards are exceeded as "nonattainment" areas. If standards are met, the area is designated as an "attainment" area. If there is inadequate or inconclusive data to make a definitive attainment designation, they are considered "unclassified." National nonattainment areas are further designated as marginal, moderate, serious, severe, or extreme as a function of deviation from standards. Each standard has a different definition, or 'form' of what constitutes attainment, based on specific air quality statistics. For example, the Federal 8-hour CO standard is not to be exceeded more than once per year; therefore, an area is in attainment of the CO standard if no more than one 8-hour ambient air monitoring values exceeds the threshold per year. In contrast, the Federal annual PM2.5 standard is met if the three-year average of the annual average PM2.5 concentration is less than or equal to the standard. Attainment status is shown in Table 3.

As part of its enforcement responsibilities, the EPA requires each state with federal nonattainment areas to prepare and submit a State Implementation Plan (SIP) that demonstrates the means to attain the national standards. The State Implementation Plan (SIP) must integrate federal, state, and local components and regulations to identify specific measures to reduce pollution, using a combination of performance standards and market-based programs within the timeframe identified in the State Implementation Plan (SIP).

As indicated below in Table 3, the Basin has been designated by the EPA as a non-attainment area for ozone (O_3) and suspended particulates (PM10 and PM2.5). Currently, the Basin is in attainment with the ambient air quality standards for carbon monoxide (CO), lead, sulfur dioxide (SO_2), suspended particulate matter (PM-2.5), and nitrogen dioxide (NO_2).

State – California Air Resources Board

The California Air Resources Board (CARB), which is a part of the California Environmental Protection Agency, is responsible for the coordination and administration of both federal and state air pollution control programs within California. In this capacity, the CARB conducts research, sets the California Ambient Air Quality Standards (CAAQS), compiles emission inventories, develops suggested control measures, provides oversight of local programs, and prepares the State Implementation Plan (SIP). The California Ambient Air Quality Standards (CAAQS) for criteria pollutants are shown in Table 2. In addition, the CARB establishes emission standards for motor vehicles sold in California, consumer products (e.g., hairspray, aerosol paints, and barbeque lighter fluid), and various types of commercial equipment. Furthermore, the motor vehicle emission standards established by CARB include compliance with the Safer Affordable Fuel-Efficient Vehicles (SAFE) Rule, issued by NHTSA and EPA in March 2020 (published on April 30, 2020 and effective after June 29, 2020). The SAFE Rule sets fuel economy and carbon dioxide standards that increase 1.5 percent in stringency each year from model years 2021 through 2026 and apply to both passenger cars and light trucks. CARB. It also sets fuel specifications to further reduce vehicular emissions.

The South Coast Air Basin has been designated by the CARB as a nonattainment area for ozone, PM10 and PM2.5. Currently, the South Coast Air Basin is in attainment with the ambient air quality standards for CO, lead, SO_2, NO_2, and sulfates and is unclassified for visibility reducing particles and Hydrogen Sulfide.

On June 20, 2002, the CARB revised the PM10 annual average standard to 20 $\mu g/m^3$ and established an annual average standard for PM2.5 of 12 $\mu g/m^3$. These standards were approved by the Office of Administrative Law in June 2003 and are now effective. On September 27, 2007 CARB approved the South Coast Air Basin and the Coachella Valley 2007 Air Quality Management Plan for Attaining the Federal 8-hour Ozone and PM2.5 Standards. The plan projected attainment for the 8-hour Ozone standard by 2024 and the PM2.5 standard by 2015.

On December 12, 2008 the CARB adopted Resolution 08-43, which limits NOx, PM10 and PM2.5 emissions from on-road diesel truck fleets that operate in California. On October 12, 2009 Executive Order R-09-010 was adopted that codified Resolution 08-43 into Section 2025, Title 13 of the California Code of Regulations. This regulation requires that by the year 2023 all commercial diesel trucks that operate in California shall meet model year 2010 (Tier 4) or latter emission standards. In the interim period, this regulation provides annual interim targets for fleet owners to meet. This regulation also provides a few exemptions including a onetime per year 3-day pass for trucks registered outside of California.

The CARB is also responsible for regulations pertaining to toxic air contaminants. The Air Toxics "Hot Spots" Information and Assessment Act (AB 2588, 1987, Connelly) was enacted in 1987 as a means to establish a formal air toxics emission inventory risk quantification program. AB 2588, as amended, establishes a process that requires stationary sources to report the type and quantities of certain substances their facilities routinely release into the South Coast Air Basin. The data is ranked by high, intermediate, and low categories, which are determined by: the potency, toxicity, quantity, volume, and proximity of the facility to nearby receptors.

AB 617 Nonvehicular air pollution: criteria air pollutants and toxic air contaminants

This bill requires the state board to develop a uniform statewide system of annual reporting of emissions of criteria air pollutants and toxic air contaminants for use by certain categories of stationary sources. The bill requires those stationary sources to report their annual emissions of criteria air pollutants and toxic air contaminants, as specified. This bill required the state board, by October 1, 2018, to prepare a monitoring plan regarding technologies for monitoring criteria air pollutants and toxic air contaminants and the need for and benefits of additional community air monitoring systems, as defined. The bill requires the state board to select, based on the monitoring plan, the highest priority locations in the state for the deployment of community air monitoring systems. The bill requires an air district containing a selected location, by July 1, 2019, to deploy a system in the selected location. The bill would authorize the air district to require a stationary source that emits air pollutants in, or that materially affect, the selected location to deploy a fence-line monitoring system, as defined, or other specified real-time, on-site monitoring. The bill authorizes the state board, by January 1, 2020, and annually thereafter, to select additional locations for the deployment of the systems. The bill would require air districts that have deployed a system to provide to the state board air quality data produced by the system. By increasing the duties of air districts, this bill would impose a state-mandated local program. The bill requires the state board to publish the data on its Internet Web site.

Regional

The SCAQMD is the agency principally responsible for comprehensive air pollution control in the South Coast Air Basin. To that end, as a regional agency, the SCAQMD works directly with the Southern California Association of Governments (SCAG), county transportation commissions, and local governments and cooperates actively with all federal and state agencies.

South Coast Air Quality Management District

The SCAQMD develops rules and regulations, establishes permitting requirements for stationary sources, inspects emission sources, and enforces such measures through educational programs or fines, when necessary. The SCAQMD is directly responsible for reducing emissions from stationary, mobile, and indirect sources. It has responded to this requirement by preparing a sequence of AQMPs. On June 30, 2016, the SCAQMD released its Draft 2016 AQMP.

Air Quality Management Plan

The 2016 AQMP is a regional blueprint for achieving the federal air quality standards and healthful air. The 2016 AQMP includes both stationary and mobile source strategies to ensure that rapidly approaching attainment deadlines are met, that public health is protected to the maximum extent feasible, and that the region is not faced with burdensome sanctions if the Plan is not approved or if the NAAQS are not met on time. As with every AQMP, a comprehensive analysis of emissions, meteorology, atmospheric chemistry, regional growth projections, and the impact of existing control measures is updated with the latest data and methods. The most significant air quality challenge in the Basin is to reduce nitrogen oxide (NOx) emissions sufficiently to meet the upcoming ozone standard deadlines. On March 23, 2017 the CARB approved the 2016 AQMP. The primary goal of this Air Quality Management Plan is to meet clean air standards and protect public health, including ensuring benefits to environmental justice and disadvantaged communities. Now that the Plan has been approved by the CARB, it has been forwarded to the U.S. EPA for its review. The Plan was approved by the EPA on June 15, 2017.

In May 2022, the SCAQMD completed the 2022 Draft AQMP. The 2022 Draft AQMP is focused on attaining the 2015 8-hour ozone standard (70 ppb) for the South Coast Air Basin and Coachella Valley. The Draft 2022 AQMP builds upon measures already in place from previous AQMPs. It also includes a variety of additional strategies such as regulation, accelerated deployment of available cleaner technologies (e.g., zero emission technologies, when cost-effective and feasible, and low NOx technologies in other applications), best management practices, co-benefits from existing programs (e.g., climate and energy efficiency), incentives, and other CAA measures to achieve the 2015 8-hour ozone standard. The 2022 AQMP was adopted December 2, 2022, by SCAQMD Governing Board. The 2022 AQMP was approved and adopted by CARB on January 26, 2023. The 2022 AQMP strategy includes the following:[2]

- Wide adoption of zero emissions technologies anywhere available.
- Low NOx technologies where zero emissions aren't feasible.
- Federal Action.
- Zero emissions technologies for residential and industrial sources such as water and space heaters in buildings and homes regionwide.
- Incentive funding in environmental justice areas.
- Prioritize benefits on the most disadvantaged communities.

SCAQMD Rules and Regulations

During construction and operation, the project must comply with applicable rules and regulations. The following are the rules the project may be required to comply with, either directly, or indirectly:

SCAQMD Rule 402

Prohibits a person from discharging from any source whatsoever such quantities of air contaminants or other material which cause injury, detriment, nuisance, or annoyance to any considerable number of persons or to

[2] SCAQMD 2022 AQMP Infographic. http://www.aqmd.gov/home/air-quality/clean-air-plans/air-quality-mgt-plan/2022-aqmp-infographic

the public, or which endanger the comfort, repose, health or safety of any such persons or the public, or which cause, or have a natural tendency to cause, injury or damage to business or property.

SCAQMD Rule 403

Governs emissions of fugitive dust during construction and operation activities. Compliance with this rule is achieved through application of standard Best Management Practices, such as application of water or chemical stabilizers to disturbed soils, covering haul vehicles, restricting vehicle speeds on unpaved roads to 15 miles per hour, sweeping loose dirt from paved site access roadways, cessation of construction activity when winds exceed 25 mph, and establishing a permanent ground cover on finished sites.

Rule 403 requires that fugitive dust be controlled with best available control measures so that the presence of such dust does not remain visible in the atmosphere beyond the property line of the emission source. In addition, SCAQMD Rule 403 requires implementation of dust suppression techniques to prevent fugitive dust from creating a nuisance off-site. Applicable dust suppression techniques from Rule 403 are summarized below. Implementation of these dust suppression techniques can reduce the fugitive dust generation (and thus the PM_{10} component). Compliance with these rules would reduce impacts on nearby sensitive receptors. Rule 403 measures may include but are not limited to the following:

- Apply nontoxic chemical soil stabilizers according to manufacturers' specifications to all inactive construction areas (previously graded areas inactive for 10 days or more).
- Water active sites at least three times daily. (Locations where grading is to occur will be thoroughly watered prior to earthmoving.)
- Cover all trucks hauling dirt, sand, soil, or other loose materials, or maintain at least 0.6 meters (2 feet) of freeboard (vertical space between the top of the load and top of the trailer) in accordance with the requirements of California Vehicle Code section 23114.
- Reduce traffic speeds on all unpaved roads to 15 miles per hour (mph) or less.
- Suspension of all grading activities when wind speeds (including instantaneous wind gusts) exceed 25 mph.
- Bumper strips or similar best management practices shall be provided where vehicles enter and exit the construction site onto paved roads or wash off trucks and any equipment leaving the site each trip.
- Replanting disturbed areas as soon as practical.
- During all construction activities, construction contractors shall sweep on-site and off-site streets if silt is carried to adjacent public thoroughfares, to reduce the amount of particulate matter on public streets. All sweepers shall be compliant with SCAQMD Rule 1186.1, Less Polluting Sweepers.

SCAQMD Rule 445

Prohibits permanently installed wood burning devices into any new development. A wood burning device means any fireplace, wood burning heater, or pellet-fueled wood heater, or any similarly enclosed, permanently installed, indoor or outdoor device burning any solid fuel for aesthetic or space-heating purposes, which has a heat input of less than one million British thermal units per hour.

SCAQMD Rule 481

Applies to all spray painting and spray coating operations and equipment. The rule states that a person shall not use or operate any spray painting or spray coating equipment unless one of the following conditions is met:

(1) The spray coating equipment is operated inside a control enclosure, which is approved by the Executive Officer. Any control enclosure for which an application for permit for new construction, alteration, or change of ownership or location is submitted after the date of adoption of this rule shall be exhausted only through filters at a design face velocity not less than 100 feet per minute nor greater than 300 feet

per minute, or through a water wash system designed to be equally effective for the purpose of air pollution control.
(2) Coatings are applied with high-volume low-pressure, electrostatic and/or airless spray equipment.
(3) An alternative method of coating application or control is used which has effectiveness equal to or greater than the equipment specified in the rule.

SCAQMD Rule 1108

Governs the sale, use, and manufacturing of asphalt and limits the volatile organic compound (VOC) content in asphalt used in the South Coast Air Basin. This rule would regulate the VOC content of asphalt used during construction. Therefore, all asphalt used during construction of the project must comply with SCAQMD Rule 1108.

SCAQMD Rule 1113

Governs the sale, use, and manufacturing of architectural coating and limits the VOC content in paints and paint solvents. This rule regulates the VOC content of paints available during construction. Therefore, all paints and solvents used during construction and operation of the project must comply with SCAQMD Rule 1113.

SCAQMD Rule 1143

Governs the manufacture, sale, and use of paint thinners and solvents used in thinning of coating materials, cleaning of coating application equipment, and other solvent cleaning operations by limiting their VOC content. This rule regulates the VOC content of solvents used during construction. Solvents used during the construction phase must comply with this rule.

SCAQMD Rule 1186

Limits the presence of fugitive dust on paved and unpaved roads and sets certification protocols and requirements for street sweepers that are under contract to provide sweeping services to any federal, state, county, agency or special district such as water, air, sanitation, transit, or school district.

SCAQMD Rule 1303

Governs the permitting of re-located or new major emission sources, requiring Best Available Control Measures and setting significance limits for PM_{10} among other pollutants.

SCAQMD Rule 1401

New Source Review of Toxic Air Contaminants, specifies limits for maximum individual cancer risk, cancer burden, and non-cancer acute and chronic hazard index from new permit units, relocations, or modifications to existing permit units, which emit toxic air contaminants.

SCAQMD Rule 1403

Asbestos Emissions from Demolition/Renovation Activities, specifies work practice requirements to limit asbestos emissions from building demolition and renovation activities, including the removal and associated disturbance of asbestos-containing materials (ACM).

SCAQMD Rule 2202

On-Road Motor Vehicle Mitigation Options, is to provide employers with a menu of options to reduce mobile source emissions generated from employee commutes, to comply with federal and state Clean Air Act

requirements, Health & Safety Code Section 40458, and Section 182(d)(1)(B) of the federal Clean Air Act. It applies to any employer who employs 250 or more employees on a full or part-time basis at a worksite for a consecutive six-month period calculated as a monthly average.

SCAQMD Rule 2305

The Warehouse Actions and Investments to Reduce Emissions (WAIRE) Program aims to reduce nitrogen oxide and diesel emissions associated with warehouses, help meet federal standards and improve public health. The WAIRE Program is an indirect source rule that regulates warehouse facilities to reduce emissions from the goods movement industry. Owners and operators of warehouses that have 100,000 square feet or more of indoor floor space in a single building must comply with the WAIRE Program. WAIRE is a menu-based point system in which warehouse operators are required to earn a specific number of points every year. The yearly number of points required is based on the number of trucks trips made to and from the warehouse each year, with larger trucks such as tractors or tractor-trailers multiplied by 2.5. Warehouse operators may be exempt from parts of the rule if they operate less than 50,000 square feet of warehousing activities, if the number of points required is less than 10, or if the WAIRE menu action chosen under performs due to circumstances beyond the operator's control, such as a manufacturer defect. SCAQMD Rule 316 establishes fees to fund Rule 2305 compliance activities.

Air Quality Guidance Documents

SCAQMD CEQA Handbook

Although the SCAQMD is responsible for regional air quality planning efforts, it does not have the authority to directly regulate air quality issues associated with plans and new development projects throughout the South Coast Air Basin. Instead, this is controlled through local jurisdictions in accordance with the California Environmental Quality Act (CEQA). In order to assist local jurisdictions with air quality compliance issues the CEQA Air Quality Handbook (SCAQMD CEQA Handbook) prepared by the SCAQMD (1993) with the most current updates found at http://www.aqmd.gov/ceqa/hdbk.html, was developed in accordance with the projections and programs of the AQMP. The purpose of the SCAQMD CEQA Handbook is to assist Lead Agencies, as well as consultants, project proponents, and other interested parties in evaluating a proposed project's potential air quality impacts. Specifically, the SCAQMD CEQA Handbook explains the procedures that the SCAQMD recommends be followed for the environmental review process required by CEQA. The SCAQMD CEQA Handbook provides direction on how to evaluate potential air quality impacts, how to determine whether these impacts are significant, and how to mitigate these impacts. SCAQMD is in the process of developing an "Air Quality Analysis Guidance Handbook" to replace the CEQA Air Quality Handbook approved by the AQMD Governing Board in 1993. The 1993 CEQA Air Quality Handbook is still available but not online. In addition, there are sections of the 1993 Handbook that are obsolete. In order to assist the CEQA practitioner in conducting an air quality analysis while the new Handbook is being prepared, supplemental information regarding: significance thresholds and analysis, emissions factors, cumulative impacts emissions analysis, and other useful subjects, are available at the SCAQMD website[3]. The SCAQMD CEQA Handbook and supplemental information is used in this analysis.

Southern California Association of Governments

The SCAG is the regional planning agency for Los Angeles, Orange, Ventura, Riverside, San Bernardino and Imperial Counties and addresses regional issues relating to transportation, the economy, community development and the environment. SCAG is the Federally designated MPO for the majority of the southern California region and is the largest MPO in the nation. With respect to air quality planning, SCAG has prepared the Regional Transportation Plan and Regional Transportation Improvement Plan (RTIP), which addresses regional development and growth forecasts. These plans form the basis for the land use and transportation components of the AQMP, which are utilized in the preparation of air quality forecasts and in the consistency

[3] http://www.aqmd.gov/home/regulations/ceqa/air-quality-analysis-handbook.

analysis included in the AQMP. The Regional Transportation Plan, Regional Transportation Improvement Plan, and AQMP are based on projections originating within the City and County General Plans.

On April 7, 2016, SCAG's Regional Council adopted the 2016-2040 Regional Transportation Plan/ Sustainable Communities Strategy (2016 RTP/SCS or Plan). The Plan is a long-range visioning plan that balances future mobility and housing needs with economic, environmental and public health goals. The Plan charts a course for closely integrating land use and transportation – so that the region can grow smartly and sustainably. It outlines more than $556.5 billion in transportation system investments through 2040. The Plan was prepared through a collaborative, continuous, and comprehensive process with input from local governments, county transportation commissions, tribal governments, non-profit organizations, businesses and local stakeholders within the counties of Imperial, Los Angeles, Orange, Riverside, San Bernardino and Ventura. In June 2016, SCAG received its conformity determination from the Federal Highway Administration (FHWA) and the Federal Transit Administration (FTA) indicating that all air quality conformity requirements for the 2016 RTP/SCS and associated 2015 FTIP Consistency Amendment through Amendment 15-12 have been met.

On September 3, 2020, SCAG's Regional Council unanimously voted to approve and fully adopt Connect SoCal (2020–2045 Regional Transportation Plan/Sustainable Communities Strategy), and the addendum to the Connect SoCal Program Environmental Impact Report. Connect SoCal is a long-range visioning plan that builds upon and expands land use and transportation strategies established over several planning cycles to increase mobility options and achieve a more sustainable growth pattern. Connect SoCal outlines more than $638 billion in transportation system investments through 2045. It was prepared through a collaborative, continuous, and comprehensive process with input from local governments, county transportation commissions, tribal governments, non-profit organizations, businesses and local stakeholders within the counties of Imperial, Los Angeles, Orange, Riverside, San Bernardino and Ventura.

Local – City of Perris

Local jurisdictions, such as the City of Perris, have the authority and responsibility to reduce air pollution through its police power and decision-making authority. Specifically, the City is responsible for the assessment and mitigation of air emissions resulting from its land use decisions. The City is also responsible for the implementation of transportation control measures as outlined in the 2022 AQMP. Examples of such measures include bus turnouts, energy-efficient streetlights, and synchronized traffic signals. In accordance with CEQA requirements and the CEQA review process, the City assesses the air quality impacts of new development projects, requires mitigation of potentially significant air quality impacts by conditioning discretionary permits, and monitors and enforces implementation of such mitigation.

The City relies on the expertise of the SCAQMD and utilizes the SCAQMD CEQA Air Quality Handbook as the guidance document for the environmental review of plans and development proposals within its jurisdiction.

The Healthy Community Element as well as the Conservation Element of the Perris General Plan summarize air quality issues in the Basin, air quality-related plans and programs administered by federal, state, and special purpose agencies, and establishes goals and policies to improve air quality.

Applicable goals and policies from the Healthy Community Element include:

Goal HC-6 Healthy Environment – Support efforts of local businesses and regional agencies to improve the health of our region's environment.

Policy HC-6.1 Support regional efforts to improve air quality through energy efficient technology, use of alternative fuels, and land use and transportation planning.

Policy HC-6.3 Promote measures that will be effective in reducing emissions during construction activities

- Perris will ensure that construction activities follow existing South Coast Air Quality Management District (SCAQMD) rules and regulations.
- All construction equipment for public and private projects will also comply with California Air Resources Board's vehicle standards. For projects that may exceed daily construction emissions established by the SCAQMD, Best Available Control Measures will be incorporated to reduce construction emissions to below daily emission standards established by the SCAQMD.
- Project proponents will be required to prepare and implement a Construction Management Plan which will include Best Available Control Measures among others. Appropriate control measures will be determined on a project-by-project basis, and should be specific to the pollutant for which the daily threshold is exceeded.

Applicable goals and policies from the Conservation Element include:

Goal X Encourage improved energy performance standards above and beyond the California Title 24 requirements.

Policy X.B Encourage the use of trees within project design to lessen energy needs, reduce the urban heat island effect, and improve air quality throughout the region.

Table 2
State and Federal Criteria Pollutant Standards

Air Pollutant	Concentration / Averaging Time		Most Relevant Effects
	California Standards	Federal Primary Standards	
Ozone (O_3)	0.09 ppm/1-hour 0.07 ppm/8-hour	0.070 ppm/8-hour	(a) Decline in pulmonary function and localized lung edema in humans and animals; (b) Risk to public health implied by alterations in pulmonary morphology and host defense in animals; (c) Increased mortality risk; (d) Risk to public health implied by altered connective tissue metabolism and altered pulmonary morphology in animals after long-term exposures and pulmonary function decrements in chronically exposed humans; (e) Vegetation damage; and (f) Property damage.
Carbon Monoxide (CO)	20.0 ppm/1-hour 9.0 ppm/8-hour	35.0 ppm/1-hour 9.0 ppm/8-hour	(a) Aggravation of angina pectoris and other aspects of coronary heart disease; (b) Decreased exercise tolerance in persons with peripheral vascular disease and lung disease; (c) Impairment of central nervous system functions; and (d) Possible increased risk to fetuses.
Nitrogen Dioxide (NO_2)	0.18 ppm/1-hour 0.03 ppm/annual	100 ppb/1-hour 0.053 ppm/annual	(a) Potential to aggravate chronic respiratory disease and respiratory symptoms in sensitive groups; (b) Risk to public health implied by pulmonary and extra-pulmonary biochemical and cellular changes and pulmonary structural changes; and (c) Contribution to atmospheric discoloration.
Sulfur Dioxide (SO_2)	0.25 ppm/1-hour 0.04 ppm/24-hour	75 ppb/1-hour 0.14 ppm/annual	(a) Bronchoconstriction accompanied by symptoms which may include wheezing, shortness of breath and chest tightness, during exercise or physical activity in persons with asthma.
Suspended Particulate Matter (PM_{10})	50 µg/m^3/24-hour 20 µg/m^3/annual	150 µg/m^3/24-hour	(a) Exacerbation of symptoms in sensitive patients with respiratory or cardiovascular disease; (b) Declines in pulmonary function growth in children; (c) Increased risk of premature death from heart or lung diseases in elderly.
Suspended Particulate Matter ($PM_{2.5}$)	12 µg/m^3 / annual	35 µg/m^3/24-hour 12 µg/m^3/annual	
Sulfates	25 µg/m^3/24-hour	No Federal Standards	(a) Decrease in ventilatory function; (b) Aggravation of asthmatic symptoms; (c) Aggravation of cardio-pulmonary disease; (d) Vegetation damage; (e) Degradation of visibility; (f) property damage.
Lead	1.5 µg/m^3/30-day	0.15 µg/m^3/3-month rolling	(a) Learning disabilities; (b) Impairment of blood formation and nerve conduction.
Visibility Reducing Particles	Extinction coefficient of 0.23 per kilometer-visibility of 10 miles or more due to particles when humidity is less than 70 percent.	No Federal Standards	Visibility impairment on days when relative humidity is less than 70 percent.

Source: http://www3.epa.gov/climatechange/ghgemissions/gases.html

Table 3
South Coast Air Basin Attainment Status

Pollutant	State Status	National Status
Ozone	Nonattainment	Nonattainment (Extreme)
Carbon monoxide	Attainment	Attainment (Maintenance)
Nitrogen dioxide	Attainment	Unclassifable/Attainment
Sulfur dioxide	Attainment	Unclassifiable/Attainment
PM10	Nonattainment	Attainment (Maintenance)
PM2.5	Nonattainment	Nonattainment (Serious)

Source (Federal and State Status): California Air Resources Board (2022) https://ww2.arb.ca.gov/resources/documents/maps-state-and-federal-area-designations & SCAQMD 2022 Air Quality Management Plan (December 2022) http://www.aqmd.gov/docs/default-source/clean-air-plans/air-quality-management-plans/2022-air-quality-management-plan/final-2022-aqmp/final-2022-aqmp.pdf?sfvrsn=16.

MONITORED AIR QUALITY

The air quality at any site is dependent on the regional air quality and local pollutant sources. Regional air quality is determined by the release of pollutants throughout the air basin. Estimates of the existing emissions in the Basin provided in the Final 2022 Air Quality Management Plan prepared by SCAQMD (December 2022) indicate that collectively, mobile sources account for 46 percent of the VOC, 85 percent of the NOx emissions, 89 percent of the CO emissions and 29 percent of directly emitted PM2.5, with another 18 percent of PM2.5 from road dust.

The SCAQMD has divided the South Coast Air Basin into 38 air-monitoring areas with a designated ambient air monitoring station representative of each area. The project site is located in the Perris Valley Air Monitoring Area (Area 24), which is located in Riverside County and covers from the San Bernardino and Riverside County line on the north, Paloma Valley on the south, Perris on the west, and the San Jacinto Valley on the east. The nearest air monitoring station to the project site is the Perris Monitoring Station (Perris Station). The Perris Station is located approximately 2.66 miles southwest of the project site at 237 ½ N. D Street, Perris. As not all monitoring stations monitor all pollutants, data was also taken from the Lake Elsinore-W Flint Street Monitoring Station located approximately 12.12 miles southwest of the project site at 506 W Flint Street, Lake Elsinore was also utilized. However, it should be noted that due to the air monitoring stations' distances from the project site, recorded air pollution levels at the air monitoring station reflect with varying degrees of accuracy, local air quality conditions at the project site. Table 4 presents the monitored pollutant levels from the Perris and Lake Elsinore Stations.

Table 4 summarizes 2019 through 2021 published monitoring data, which is the most recent 3-year period available. The data shows that during the past few years, the project area has exceeded the ozone standards.

Ozone

During the 2019 to 2021 monitoring period, the State 1-hour concentration standard for ozone was exceeded between 25 and 34 days each year at the Perris Station. The State 8-hour ozone standard has been exceeded between 38 and 48 days each year over the past three years at the Perris Station. The Federal 8-hour ozone standard was exceeded between 55 and 74 days each year over the past three years at the Perris Station.

Ozone is a secondary pollutant as it is not directly emitted. Ozone is the result of chemical reactions between other pollutants, most importantly hydrocarbons and NO_2, which occur only in the presence of bright sunlight. Pollutants emitted from upwind cities react during transport downwind to produce the oxidant concentrations experienced in the area. Many areas of the SCAQMD contribute to the ozone levels experienced at the monitoring station, with the more significant areas being those directly upwind.

Carbon Monoxide

CO is another important pollutant that is due mainly to motor vehicles. The Lake Elsinore Station did not record an exceedance of the state or federal 8-hour CO standard for the last three years.

Nitrogen Dioxide

The Lake Elsinore Station did not record an exceedance of the State or Federal NO_2 standards for the last three years.

Particulate Matter

The State 24-hour concentration standards for PM10 were exceeded between four and six days each year over the last three years at the Perris Station. Over the past three years, the Peris Station did not record an exceedance of the Federal 24-hour standards for PM10.

There was insufficient data over the last three years for the Federal 24-hour standard for PM2.5 at the Lake Elsinore Station.

According to the EPA, some people are much more sensitive than others to breathing fine particles (PM10 and PM2.5). People with influenza, chronic respiratory and cardiovascular diseases, and the elderly may suffer worsening illness and premature death due to breathing these fine particles. People with bronchitis can expect aggravated symptoms from breathing in fine particles. Children may experience decline in lung function due to breathing in PM10 and PM2.5. Other groups considered sensitive are smokers and people who cannot breathe well through their noses. Exercising athletes are also considered sensitive, because many breathe through their mouths during exercise.

Table 4
Air Quality Monitoring Summary

Pollutant (Standard)[1]		Year		
		2019	2020	2021
Ozone:	Maximum 1-Hour Concentration (ppm)	0.118	0.125	0.117
	Days > CAAQS (0.09 ppm)	28	34	25
	Maximum 8-Hour Concentration (ppm)	0.095	0.106	0.094
	Days > NAAQS (0.070 ppm)	64	74	55
	Days > CAAQS (0.070 ppm)	38	48	38
Carbon Monoxide:[2]	Maximum 8-Hour Concentration (ppm)	*	*	*
	Days > CAAQS (9 ppm)	0	0	0
	Days > NAAQS (9 ppm)	0	0	0
Nitrogen Dioxide:[2]	Maximum 1-Hour Concentration (ppm)	0.038	0.044	0.044
	Days > CAAQS (0.18 ppm)	0	0	0
Inhalable Particulates (PM10):	Maximum 24-Hour Concentration (µg/m^3)	97.0	92.3	77.5
	Days > NAAQS (150 µg/m3)	0	0	0
	Days > CAAQS (50 µg/m3)	4	6	4
	Annual Average (µg/m3)	25.8	33.4	30.4
Ultra-Fine Particulates (PM2.5):[2]	Maximum 24-Hour Concentration (µg/m3)	17.6	41.6	28.8
	Days > NAAQS (35 µg/m3)	*	*	*
	Annual Average (µg/m3)	*	7.2	6.9

Notes:

Source: http://www.arb.ca.gov/adam/topfour/topfour1.php. Data from the Perris Monitoring Station, unless otherwise noted.

(1) CAAQS = California Ambient Air Quality Standard; NAAQS = National Ambient Air Quality Standard; ppm = parts per million

* Means there was insufficient data available to determine value.

(2) Data taken from the Lake Elsinore-W Flint Street Monitoring Station.

AIR QUALITY STANDARDS

Significance Thresholds

Appendix G of the State CEQA Guidelines

Appendix G of the State CEQA Guidelines states that, where available, the significance criteria established by the applicable air quality management district or air pollution control district may be relied upon to make a significance determination. Pursuant to Appendix G, the project would result in a significant impact related to air quality if it would:

- Conflict with or obstruct the implementation of the applicable air quality plan;
- Result in a cumulatively considerable net increase of any criteria pollutant for which the project region is nonattainment under an applicable federal or state ambient air quality standard;
- Expose sensitive receptors to substantial pollutant concentrations; or
- Result in other emissions (such as those leading to odors) adversely affecting a substantial number of people.

The CEQA Guidelines Section 15064.7 provides the significance criteria established by the applicable air quality management district or air pollution control district, when available, may be relied upon to make determinations of significance. The potential air quality impacts of the project are, therefore, evaluated according to thresholds developed by SCAQMD in their CEQA Air Quality Handbook, Air Quality Analysis Guidance Handbook, and subsequent guidance, which are listed below.[4] Therefore, the project would result in a potentially significant impact to air quality if it would:

AIR-1: Conflict with or obstruct the implementation of the applicable air quality plan;

AIR-2: Violate any air quality standard or contribute substantially to an existing or projected air quality violation as a result of:

- Criteria pollutant emissions during construction (direct and indirect) in excess of the SCAQMD's regional significance thresholds,
- Criteria pollutant emissions during operation (direct and indirect) in excess of the SCAQMD's regional significance thresholds.

AIR-3: Result in a cumulatively considerable net increase of any criteria pollutant for which the project region is nonattainment under an applicable federal or state ambient air quality standard (including releasing emissions which exceed quantitative thresholds for ozone precursors);

AIR-4: Expose sensitive receptors to substantial pollutant concentrations that would:

- Exceed SCAQMD's localized significance thresholds,
- Cause or contribute to the formation of CO hotspots.

AIR-5: Create objectionable odors affecting a substantial number of people.

[4] While the SCAQMD CEQA Air Quality Handbook contains significance thresholds for lead, Project construction and operation would not include sources of lead emissions and would not exceed the established thresholds for lead. Unleaded fuel and unleaded paints have virtually eliminated lead emissions from industrial land use projects such as the Project. As a result, lead emissions are not further evaluated herein.

The SCAQMD is in the process of developing an Air Quality Analysis Guidance Handbook to replace the CEQA Air Quality Handbook. In the interim, supplemental guidance has been adopted by the SCAQMD. The potential air quality impacts of the project are, therefore, evaluated according to numeric indicators developed by the SCAQMD in the CEQA Air Quality Handbook and supplemental guidance from the SCAQMD.[5]

Regional Air Quality

Many air quality impacts that derive from dispersed mobile sources, which are the dominate pollution generators in the basin, often occurs hours later and miles away after photochemical processes have converted primary exhaust pollutants into secondary contaminants such as ozone. The incremental regional air quality impact of an individual project is generally very small and difficult to measure. Therefore, the SCAQMD has developed significance thresholds based on the volume of pollution emitted rather than on actual ambient air quality because the direct air quality impact of a project is not quantifiable on a regional scale. The SCAQMD CEQA Handbook states that any project in the South Coast Air Basin with daily emissions that exceed any of the identified significance thresholds should be considered as having an individually and cumulatively significant air quality impact. For the purposes to this air quality impact analysis, a regional air quality impact would be considered significant if emissions exceed the SCAQMD significance thresholds identified in Table 5.

Local Air Quality

Project-related construction air emissions may have the potential to exceed the State and Federal air quality standards in the project vicinity, even though these pollutant emissions may not be significant enough to create a regional impact to the South Coast Air Basin. In order to assess local air quality impacts the SCAQMD has developed Localized Significance Thresholds (LSTs) to assess the project-related air emissions in the project vicinity. The SCAQMD has also provided Final Localized Significance Threshold Methodology (LST Methodology), June 2003, which details the methodology to analyze local air emission impacts. The Localized Significance Threshold Methodology found that the primary emissions of concern are NO_2, CO, PM10, and PM2.5.

The significance thresholds for the local emissions of NO_2 and CO are determined by subtracting the highest background concentration from the last three years of these pollutants from Table 4 above, from the most restrictive ambient air quality standards for these pollutants that are outlined in the Localized Significance Thresholds. Table 5 shows the ambient air quality standards for NO_2, CO, and PM10 and PM2.5.

Toxic Air Contaminants

According to the SCAQMD CEQA Handbook, any project that has the potential to expose the public to toxic air contaminants in excess of the following thresholds would be considered to have a significant air quality impact:

- If the Maximum Incremental Cancer Risk is 10 in one million or greater; or
- Toxic air contaminants from the proposed project would result in a Hazard Index increase of 1 or greater.

In order to determine if the proposed project may have a significant impact related to hazardous air pollutants (HAP), the Health Risk Assessment Guidance for analyzing Cancer Risks from Mobile Source Diesel Idling Emissions for CEQA Air Quality Analysis, (Diesel Analysis), prepared by SCAQMD, August 2003, recommends that if the proposed project is anticipated to create hazardous air pollutants through stationary sources or regular operations of diesel trucks on the project site, then the proximity of the nearest receptors to the

[5] While the SCAQMD CEQA Air Quality Handbook contains significance thresholds for lead, Project construction and operation would not include sources of lead emissions and would not exceed the established thresholds for lead. Unleaded fuel and unleaded paints have virtually eliminated lead emissions from residential land use projects such as the Project. As a result, lead emissions are not further evaluated herein.

source of the hazardous air pollutants and the toxicity of the hazardous air pollutants should be analyzed through a comprehensive facility-wide health risk assessment (HRA).

The potential for health risks due to project-related diesel particulate matter (DPM) emissions is examined in Section 3 of this report.

Odor Impacts

The SCAQMD CEQA Handbook states that an odor impact would occur if the proposed project creates an odor nuisance pursuant to SCAQMD Rule 402, which states:

A person shall not discharge from any source whatsoever such quantities of air contaminants or other material which cause injury, detriment, nuisance, or annoyance to any considerable number of persons to the public, or which endanger the comfort, repose, health or safety of any such persons or the public, or which cause, or have a natural tendency to cause, injury or damage to business or property.

The provisions of this rule shall not apply to odors emanating from agricultural operations necessary for the growing of crops or the raising of fowl or animals.

If the proposed project results in a violation of Rule 402 with regards to odor impacts, then the proposed project would create a significant odor impact.

Table 5
SCAQMD Air Quality Significance Thresholds

Mass Daily Thresholds[1]		
Pollutant	Construction (lbs/day)	Operation (lbs/day)
NOx	100	55
VOC	75	55
PM10	150	150
PM2.5	55	55
SOx	150	150
CO	550	550
Lead	3	3
Toxic Air Contaminants (TACs), Odor and GHG Thresholds		
TACs (including carginogens and non-carcinogens)	Maximum Incremental Cancer Risk ≥ 10 in 1 million Cancer Burden > 0.5 excess cancer cases (in areas ≥ 1 in 1 million) Chronic & Acute Hazard Index > 1.0 (project increment)	
Odor	Project creates an odor nuisance pursuant to South Coast AQMD Rule 402	
GHG	10,000 MT/yr CO2e for industrial facilities	
Ambient Air Quality Standards for Criteria Pollutants[2]		
NO2 1-hour average annual arithmetic mean	South Coast AQMD is in attainment; project is significant if it causes or contributes to an exceedance of the following attainment standards: 0.18 ppm (state) 0.03 ppm (state) & 0.0534 ppm (federal)	
PM10 24-hour average annual average	10.4 µg/m^3 (construction)[3] & 2.5 ug/m^3 (operation) 1.0 ug/m^3	
PM2.5 24-hour average	10.4 µg/m^3 (construction)[3] & 2.5 µg/m^3 (operation)	
SO2 1-hour average 24-hour average	0.25 ppm (state) & 0.075 ppm (federal – 99th percentile) 0.04 ppm (state)	
Sulfate 24-hour average	25 µg/m^3 (state)	
CO 1-hour average 8-hour average	South Coast AQMD is in attainment; project is significant if it causes or contributes to an exceedance of the following attainment standards: 20 ppm (state) & 35 ppm (federal) 9 ppm (state/federal)	
Lead 30-day average Rolling 3-month average	1.5 µg/m^3 (state) 0.15 µg/m^3 (federal)	

Notes:

Source: http://www.aqmd.gov/home/rules-compliance/ceqa/air-quality-analysis-handbook

(1) Source: South Coast AQMD CEQA Handbook (South Coast AQMD, 1993)

(2) Ambient air quality thresholds for criteria pollutants based on South Coast AQMD Rule 1303, Table A-2 unless otherwise stated.

(3) Ambient air quality threshold based on South Coast AQMD Rule 403.

SHORT-TERM CONSTRUCTION EMISSIONS

Construction activities associated with the proposed project would have the potential to generate air emissions, toxic air contaminant emissions, and odor impacts. Assumptions for the phasing, duration, and required equipment for the construction of the proposed project were obtained from the project applicant. The construction activities for the proposed project are anticipated to include: grading of approximately 20.14 acres; construction of a 301,101 square foot warehouse building (with 4,000 square foot mezzanine) and 148,396 square feet of landscaping; paving of a parking lot with 120 automobile parking spaces and 164 trailer parking spaces and an additional approximately 7.35 acres for loading areas and driveways; and application of architectural coatings. Grading is anticipated to include 11,450 cubic yards (CY) of export. See Appendix B for more details.

The proposed project is anticipated to start construction no sooner than early July 2024 with completion estimated by the beginning of April 2025. The project is anticipated to be operational in 2025.

Methodology

The following provides a discussion of the methodology used to calculate regional construction air emissions and an analysis of the proposed project's short-term construction emissions for the criteria pollutants. The construction-related regional air quality impacts have been analyzed for both criteria pollutants and GHGs.

Emissions are estimated using the CalEEMod (Version 2022.1.1.14) software, which is a statewide land use emissions computer model designed to provide a uniform platform for government agencies, land use planners, and environmental professionals to quantify potential criteria pollutant and GHG emissions from a variety of land use projects. CalEEMod was developed in collaboration with the air districts of California. Regional data (e.g., emission factors, trip lengths, meteorology, source inventory, etc.) have been provided by the various California air districts to account for local requirements and conditions. The model is considered to be an accurate and comprehensive tool for quantifying air quality and GHG impacts from land use projects throughout California and is recommended by the SCAQMD.[6]

Daily regional emissions during construction are forecasted by assuming a conservative estimate of construction activities (i.e., assuming all construction occurs at the earliest feasible date) and applying the mobile source and fugitive dust emissions factors. The input values used in this analysis were adjusted to be project-specific for the construction schedule and the equipment used was based on CalEEMod defaults. The CalEEMod program uses the EMFAC2021 computer program to calculate the emission rates specific for the southwestern portion of Riverside County for construction-related employee vehicle trips and the OFFROAD2017 computer program to calculate emission rates for heavy truck operations. EMFAC2021 and OFFROAD2017 are computer programs generated by CARB that calculates composite emission rates for vehicles. Emission rates are reported by the program in grams per trip and grams per mile or grams per running hour. Daily truck trips and CalEEMod default trip length data were used to assess roadway emissions from truck exhaust. The maximum daily emissions are estimated values for the worst-case day and do not represent the emissions that would occur for every day of project construction. The maximum daily emissions are compared to the SCAQMD daily regional numeric indicators. Detailed construction equipment lists, construction scheduling, and emission calculations are provided in Appendix B.

The project will be required to comply with existing SCAQMD rules for the reduction of fugitive dust emissions. SCAQMD Rule 403 establishes these procedures. Compliance with this rule is achieved through application of standard best management practices in construction and operation activities, such as application of water or chemical stabilizers to disturbed soils, managing haul road dust by application of water, covering haul vehicles, restricting vehicle speeds on unpaved roads to 15 mph, sweeping loose dirt from paved site access roadways, cessation of construction activity when winds exceed 25 mph and establishing a permanent,

[6] South Coast Air Quality Management District, California Emissions Estimator Model, http://www.aqmd.gov/caleemod/.

stabilizing ground cover on finished sites. In addition, projects that disturb 50 acres or more of soil or move 5,000 cubic yards of materials per day are required to submit a Fugitive Dust Control Plan or a Large Operation Notification Form to SCAQMD. Based on the size of the Project area (approximately 20.14 acres) a Fugitive Dust Control Plan or Large Operation Notification would not be required.

SCAQMD's Rule 403 minimum requirements require that the application of the best available dust control measures is used for all grading operations and include the application of water or other soil stabilizers in sufficient quantity to prevent the generation of visible dust plumes. Compliance with Rule 403 would require the use of water trucks during all phases where earth moving operations would occur. Compliance with Rule 403 has been included in the CalEEMod modeling for the proposed project.

Per SCAQMD Rule 1113 as amended on June 3, 2011, the architectural coatings that would be applied after January 1, 2014 will be limited to an average of 50 grams per liter or less of VOCs for building coatings and 100 grams per liter or less of VOCs for traffic coatings. CalEEMod defaults have been adjusted accordingly.

The phases of the construction activities which have been analyzed below for each phase are: (1) grading, (2) building construction, (3) paving, and (4) application of architectural coatings. Details pertaining to the project's construction timing and the type of equipment modeled for each construction phase are available in the CalEEMod output in Appendix B.

Construction-Related Regional Impacts

The maximum summer or winter criteria pollutant emissions from the proposed project's construction-related criteria pollutant emissions are shown below in Table 6. Table 6 shows that none of the project's emissions will exceed regional thresholds. Therefore, a less than significant regional air quality impact would occur from construction of the proposed project.

Construction-Related Local Impacts

Construction-related air emissions may have the potential to exceed the State and Federal air quality standards in the project vicinity, even though these pollutant emissions may not be significant enough to create a regional impact to the South Coast Air Basin. The proposed project has been analyzed for the potential local air quality impacts created from: construction-related fugitive dust and diesel emissions; from toxic air contaminants; and from construction-related odor impacts.

Local Air Quality Impacts from Construction

The SCAQMD has published a "Fact Sheet for Applying CalEEMod to Localized Significance Thresholds" (South Coast Air Quality Management District 2011b). CalEEMod calculates construction emissions based on the number of equipment hours and the maximum daily disturbance activity possible for each piece of equipment. In order to compare CalEEMod reported emissions against the localized significance threshold lookup tables, the CEQA document should contain the following parameters:

(1) The off-road equipment list (including type of equipment, horsepower, and hours of operation) assumed for the day of construction activity with maximum emissions.
(2) The maximum number of acres disturbed on the peak day.
(3) Any emission control devices added onto off-road equipment.
(4) Specific dust suppression techniques used on the day of construction activity with maximum emissions.

The CalEEMod output in Appendix B shows the equipment used for this analysis.

As shown in Table 7, the maximum number of acres disturbed in a day would be 4 acres during grading. The local air quality emissions from construction were analyzed using the SCAQMD's Mass Rate Localized

Significant Threshold Look-up Tables and the methodology described in Localized Significance Threshold Methodology prepared by SCAQMD (revised July 2008). The Look-up Tables were developed by the SCAQMD in order to readily determine if the daily emissions of CO, NOx, PM10, and PM2.5 from the proposed project could result in a significant impact to the local air quality. The emission thresholds were calculated based on the Perris Valley source receptor area (SRA) 24 and a disturbance value of two acres per day, to be conservative. According to LST Methodology, any receptor located closer than 25 meters (82 feet) shall be based on the 25-meter thresholds. The nearest sensitive receptors to the project site are the existing single-family residential dwelling units and mobile home park located adjacent to the west of the project site; therefore, the SCAQMD Look-up Tables for 25 meters was used. Table 8 shows the on-site emissions from the CalEEMod model for the different construction phases and the LST emissions thresholds.

The data provided in Table 8 shows that none of the analyzed criteria pollutants would exceed the local emissions thresholds at the nearest sensitive receptors. Therefore, a less than significant local air quality impact would occur from construction of the proposed project.

Construction-Related Health Impacts

Regarding health effects related to criteria pollutant emissions, the applicable significance thresholds are established for regional compliance with the state and federal ambient air quality standards, which are intended to protect public health from both acute and long-term health impacts, depending on the potential effects of the pollutant. Because regional and local emissions of criteria pollutants during construction of the project would be below the applicable thresholds, it would not contribute to long-term health impacts related to nonattainment of the ambient air quality standards. Therefore, significant adverse acute health impacts as a result of project construction are not anticipated.

Construction-Related Toxic Air Contaminant Impacts

The greatest potential for toxic air contaminant emissions would be related to diesel particulate emissions associated with heavy equipment operations during construction of the proposed project. According to the Office of Environmental Health Hazard Assessment (OEHHA)[7] and the SCAQMD *Health Risk Assessment Guidance for Analyzing Cancer Risks from Mobile Source Diesel Idling Emissions for CEQA Air Quality Analysis* (August 2003),[8] health effects from TACs are described in terms of individual cancer risk based on a lifetime (i.e., 30-year) resident exposure duration. Given the temporary and short-term construction schedule (approximately 9 months), the project would not result in a long-term (i.e., lifetime or 30-year) exposure as a result of project construction. Furthermore, construction-based particulate matter (PM) emissions (including diesel exhaust emissions) do not exceed any local or regional thresholds.

The project would comply with the CARB Air Toxics Control Measure that limits diesel powered equipment and vehicle idling to no more than 5 minutes at a location, and the CARB In-Use Off-Road Diesel Vehicle Regulation; compliance with these would minimize emissions of TACs during construction. The project would also comply with the requirements of SCAQMD Rule 1403 if asbestos is found during the renovation and construction activities. Therefore, impacts from TACs during construction would be less than significant.

Construction-Related Odor Impacts

Potential sources that may emit odors during construction activities include the application of materials such as asphalt pavement. The objectionable odors that may be produced during the construction process are of short-term in nature and the odor emissions are expected to cease upon the drying or hardening of the odor

[7] Office of Environmental Health Hazard Assessment, Air Toxic Hot Spots Program Risk Assessment Guidelines Guidance Manual for Preparation of Health Risk Assessment, February 2015, https://oehha.ca.gov/media/downloads/crnr/2015guidancemanual.pdf.

[8] South Coast Air Quality Management District, Health Risk Assessment Guidance for Analyzing Cancer Risks from Mobile Source Diesel Idling Emissions for CEQA Air Quality Analysis, August 2003,http://www.aqmd.gov/docs/default-source/ceqa/handbook/mobile-source-toxics-analysis.doc?sfvrsn=2.

producing materials. Due to the short-term nature and limited amounts of odor producing materials being utilized, no significant impact related to odors would occur during construction of the proposed project. Diesel exhaust and VOCs would be emitted during construction of the project, which are objectionable to some; however, emissions would disperse rapidly from the project site and therefore should not reach an objectionable level at the nearest sensitive receptors.

Table 6
Construction-Related Regional Pollutant Emissions

Activity	Pollutant Emissions (pounds/day)					
	ROG	NOx	CO	SO_2	PM10	PM2.5
Maximum Daily Emissions[1,2,3]	53.00	38.20	32.80	0.08	6.23	3.13
SCAQMD Thresholds	75	100	550	150	150	55
Exceeds Thresholds?	No	No	No	No	No	No

Notes:

Source: CalEEMod Version 2022.1.1.14.

(1) Includes both on-site and off-site emissions. On-site grading PM-10 and PM-2.5 emissions show compliance with SCAQMD Rule 403.

(2) Construction, painting and paving phases may overlap.

(3) Architectural coating emissions take into account SCAQMD Rule 1113 which limits architectural coatings applied to buildings to 50 g/L VOC.

Table 7
Maximum Number of Acres Disturbed Per Day

Activity	Equipment	Number	Acres/8hr-day	Total Acres
Grading	Rubber Tired Dozers	1	0.5	0.5
	Graders	1	0.5	0.5
	Scrapers	2	1.0	2.0
	Crawler Tractors[1]	2	0.5	1.0
Total for phase		-	-	4.0

Notes:

Source: South Coast AQMD, Fact Sheet for Applying CalEEMod to Localized Significance Thresholds, 2011b.

(1) Tractor/loader/backhoe is a suitable surrogate for a crawler tractor per SCAQMD staff.

Table 8
Local Construction Emissions at the Nearest Receptors

Activity	On-Site Pollutant Emissions (pounds/day)			
	NOx	CO	PM10	PM2.5
Grading	34.30	30.20	5.05	2.76
Building Construction	18.70	20.80	0.81	0.75
Paving	7.81	10.00	0.39	0.36
Architectural Coating	0.91	1.15	0.03	0.03
SCAQMD Thresholds[1]	170	883	7	4
Exceeds Threshold?	No	No	No	No

Notes:

Source: Calculated from CalEEMod and SCAQMD's Mass Rate Look-up Tables for 2 acres, to be conservative, at a distance of 25 m in SRA 24 Perris Valley.

(1) The nearest sensitive receptors are the existing single-family residential dwelling units and mobile home park located adjacent to the west of the project site; therefore, the 25 meter threshold was used.

Note: The project will disturb up to a maximum of 4 acres a day during grading (see Table 7).

LONG-TERM OPERATIONAL EMISSIONS

The on-going operation of the proposed project would result in a long-term increase in air quality emissions. This increase would be due to emissions from the project-generated vehicle trips and through operational emissions from the on-going use of the proposed project. The following section provides an analysis of potential long-term air quality impacts due to: regional air quality and local air quality impacts with the on-going operations of the proposed project.

Operations-Related Regional Air Quality Impacts

The potential operations-related air emissions have been analyzed below for the criteria pollutants and cumulative impacts.

Operations-Related Criteria Pollutants Analysis

The operations-related criteria air quality impacts created by the proposed project have been analyzed through the use of the CalEEMod model. The operating emissions were based on the year 2025, which is the anticipated opening year for the proposed project. The operations emissions printouts from the CalEEMod model are provided in Appendix B. The CalEEMod analyzes operational emissions from area sources, energy usage, and mobile sources, which are discussed below.

Mobile Sources

Mobile sources include emissions from the additional vehicle miles generated from the proposed project. The vehicle trips associated with the proposed project have been analyzed by inputting the project-generated vehicular trips (trip generation rate) from the Redlands West Industrial Project Trip Generation Comparison (Trip Generation Comparison) prepared by Ganddini Group, Inc. (April 7, 2023) into the CalEEMod Model.[9] The Trip Generation Comparison found that the proposed project would create approximately 544 vehicle trips per day (non-PCE) and 650 vehicle trips per day (PCE) with a trip generation rate of 1.81 trips per thousand square foot per day. The program then applies the emission factors for each trip which is provided by the EMFAC2021 model to determine the vehicular traffic pollutant emissions.

The Trip Generation Comparison found that the proposed warehouse would create 476 automobile round trips, 11 2-axle truck round trips, 14 3-axle truck round trips, and 43 4+-axle truck round trips per day (non-PCE). The vehicle mix for the trailer parking lot was changed in CalEEMod to match the Trip Generation Comparison (see Table 9) and the percentages in CalEEMod were changed to 87.5% autos (H-W) and 12.5% trucks (W-O) to match the overall vehicle percentages given in the Trip Generation Comparison. Due to the proposed project's location and proposed warehouse land use, the average customer based trip length was increased to 40 miles per SCAQMD recommendation, while all other trip lengths were based on the urban default values.

Area Sources

Per the CAPCOA Appendix A Calculation Details for CalEEMod, area sources include emissions from consumer products, landscape equipment and architectural coatings. Landscape maintenance includes fuel combustion emissions from equipment such as lawn mowers, rototillers, shredders/grinders, blowers, trimmers, chain saws, and hedge trimmers, as well as air compressors, generators, and pumps. As specifics

[9] The Trip Generation Comparison prepared by Ganddini Group (April 7, 2023) was based on an earlier version of project site plan. The total square footage of the project analyzed in the Trip Generation Comparison is 301,443 square feet whereas the most recent site plan, used in this analysis, dated (July 17, 2023) has the total building square footage at 301,101 square feet. Therefore, as the trip generation from the original Trip Generation Comparison is of based on a slightly larger building, it is considered to be more conservative, and has been utilized in this analysis to demonstrate worst-case emissions.

were not known about the landscaping equipment fleet, CalEEMod defaults were used to estimate emissions from landscaping equipment. No changes were made to the default area source parameters.

Energy Usage

Energy usage includes emissions from the generation of electricity and natural gas used on-site. No changes were made to the default energy usage parameters.

Offroad Sources

Offroad sources include emissions from the use of two CNG forklifts, 6 hours a day, 5 days a week inside the warehouse.[10]

Stationary Sources

Stationary sources include emissions from the occasional use/testing of a 400 HP emergency back-up generator[11] 12 hours a year and 200 HP emergency fire pump 12 hours a year.

Project Impacts

The maximum daily pollutant emissions created from the proposed project's long-term operations have been calculated and are shown below in Table 10. The results show that none of the SCAQMD regional thresholds would be exceeded. Therefore, a less than significant regional air quality impact would occur from operation of the proposed project.

Operations-Related Local Air Quality Impacts

Project-related air emissions may have the potential to exceed the State and Federal air quality standards in the project vicinity, even though these pollutant emissions may not be significant enough to create a regional impact to the South Coast Air Basin. The proposed project has been analyzed for the potential local CO emission impacts from the project-generated vehicular trips and from the potential local air quality impacts from on-site operations. The following analysis analyzes the vehicular CO emissions, local impacts from on-site operations per SCAQMD LST methodology, and odor impacts.

Local CO Emission Impacts from Project-Generated Vehicular Trips

CO is the pollutant of major concern along roadways because the most notable source of CO is motor vehicles. For this reason, CO concentrations are usually indicative of the local air quality generated by a roadway network and are used as an indicator of potential local air quality impacts. Local air quality impacts can be assessed by comparing future without and with project CO levels to the State and Federal CO standards which were presented above.

To determine if the proposed project could cause emission levels in excess of the CO standards discussed above, a sensitivity analysis is typically conducted to determine the potential for CO "hot spots" at a number of intersections in the general project vicinity. Because of reduced speeds and vehicle queuing, "hot spots" potentially can occur at high traffic volume intersections with a Level of Service E or worse.

The analysis prepared for CO attainment in the South Coast Air Basin by the SCAQMD can be used to assist in evaluating the potential for CO exceedances in the South Coast Air Basin. CO attainment was thoroughly

[10] As the tenant is not currently known, it is unknown if any forklifts will be used on-site; however, to be conservative an analyze the worst-case, emissions from the use of two CNG (as the forklifts will be used in an indoor environment) were included in this analysis.

[11] It is unknown if an emergency generator will be installed on-site; however, to be conservative an analyze the worst-case, emissions from the use of a 400 HP diesel emergency generator were included in this analysis.

analyzed as part of the SCAQMD's 2003 Air Quality Management Plan (2003 AQMP) and the 1992 Federal Attainment Plan for Carbon Monoxide (1992 CO Plan). As discussed in the 1992 CO Plan, peak carbon monoxide concentrations in the South Coast Air Basin are due to unusual meteorological and topographical conditions, and not due to the impact of particular intersections. Considering the region's unique meteorological conditions and the increasingly stringent CO emissions standards, CO modeling was performed as part of 1992 CO Plan and subsequent plan updates and air quality management plans. In the 1992 CO Plan, a CO hot spot analysis was conducted for four busy intersections in Los Angeles at the peak morning and afternoon time periods. The intersections evaluated included: South Long Beach Boulevard and Imperial Highway (Lynwood); Wilshire Boulevard and Veteran Avenue (Westwood); Sunset Boulevard and Highland Avenue (Hollywood); and La Cienega Boulevard and Century Boulevard (Inglewood). These analyses did not predict a violation of CO standards. The busiest intersection evaluated was that at Wilshire Boulevard and Veteran Avenue, which has a daily traffic volume of approximately 100,000 vehicles per day. The Los Angeles County Metropolitan Transportation Authority evaluated the Level of Service in the vicinity of the Wilshire Boulevard/Veteran Avenue intersection and found it to be Level of Service E during the morning peak hour and Level of Service F during the afternoon peak hour.

The Trip Generation Comparison showed that the proposed project would generate a maximum of approximately 544 daily vehicle trips whereas the previous version of the site plan would generate 605 daily vehicle trips. Based on the previous version of the site plan, which has a larger trip generation rate per day, the intersection with the highest traffic volume is located at Redlands Avenue and Rider Street and has an Opening Year (2023) Plus Project PM peak hour volume of 353 vehicles. The 1992 Federal Attainment Plan for Carbon Monoxide (1992 CO Plan) showed that an intersection which has a daily traffic volume of approximately 100,000 vehicles per day would not violate the CO standard. Therefore, as the intersection volume falls far short of 100,000 vehicles per day, no CO "hot spot" modeling was performed and no significant long-term air quality impact is anticipated to local air quality with the on-going use of the proposed project.

Local Air Quality Impacts from On-Site Operations

Project-related air emissions from on-site sources such as architectural coatings, landscaping equipment, on-site usage of natural gas appliances as well as the operation of vehicles on-site may have the potential to exceed the State and Federal air quality standards in the project vicinity, even though these pollutant emissions may not be significant enough to create a regional impact to the South Coast Air Basin. The nearest sensitive receptors that may be impacted by the proposed project are the existing single-family residential dwelling units and mobile home park located adjacent to the west of the project site.

The local air quality emissions from on-site operations were analyzed according to the methodology described in Localized Significance Threshold Methodology, prepared by SCAQMD, revised July 2008. The Look-up Tables were developed by the SCAQMD in order to readily determine if the daily emissions of CO, NOx, PM10, and PM2.5 from the proposed project could result in a significant impact to the local air quality. Per SCAQMD staff, the 5-acre Look-up Table, which is the largest site available, can be used as a conservative screening analysis for on-site operational emissions to determine whether more-detailed dispersion modeling would be necessary. The proposed project was analyzed based on the Perris Valley source receptor area (SRA) 24 and as the site is only 20.14 acres, used the thresholds for a five-acre project site.

Table 11 shows the on-site emissions from the CalEEMod model that includes natural gas usage, landscape maintenance equipment, and vehicles operating on-site and the calculated emissions thresholds. Per LST methodology, mobile emissions include only on-site sources which equate to approximately 10 percent of the project-related new mobile sources.[12] The data provided in Table 11 shows that the on-going operations of

[12] The project site is approximately 0..28 miles in length at its longest point; therefore, the on-site mobile source emissions represent approximately 1/20th of the shortest CalEEMod default distance of 5.75 miles. Therefore, to be conservative, 1/10th the distance (dividing the mobile source emissions by 10) was used to represent the portion of the overall mobile source emissions that would occur on-site.

the proposed project would not exceed SCAQMD local operational thresholds of significance discussed above. Therefore, the on-going operations of the proposed project would create a less than significant operations-related impact to local air quality due to on-site emissions and no mitigation would be required.

Operations-Related Health Impacts

Regarding health effects related to criteria pollutant emissions, the applicable significance thresholds are established for regional compliance with the state and federal ambient air quality standards, which are intended to protect public health from both acute and long-term health impacts, depending on the potential effects of the pollutant. Because regional and local emissions of criteria pollutants during operation of the project would be below the applicable thresholds, it would not contribute to long-term health impacts related to nonattainment of the ambient air quality standards. Therefore, significant adverse acute health impacts as a result of project operation are not anticipated. A detailed operational health risk assessment analysis is included in Section 3 of this report.

Operations-Related Odor Impacts

Potential sources that may emit odors during the on-going operations of the proposed project would include odor emissions from the intermittent diesel delivery truck emissions and trash storage areas. Due to the distance of the nearest receptors from the project site and through compliance with SCAQMD's Rule 402 no significant impact related to odors would occur during the on-going operations of the proposed project.

Table 9
CalEEMod Revised Vehicle Mix Parameters

CalEEMod Vehicle Type	Vehicle Mix from Traffic Analysis	CalEEMod Default Mix[1]		CalEEMod Revised Mix[2]	
		Ratio	Number of Vehicles	Ratio	Number of Vehicles
Light Auto	Automobile	0.496	270	0.472	257
Light Truck < 3750 lbs	Automobile	0.039	21	0.037	20
Light Truck 3751-5750 lbs	Automobile	0.201	109	0.191	104
Med Truck 5751-8500 lbs	Automobile	0.160	87	0.152	83
Lite-Heavy Truck 8501-10,000 lbs	2-Axle Truck	0.032	17	0.016	8
Lite-Heavy Truck 10,001-14,000 lbs	2-Axle Truck	0.009	5	0.004	2
Med-Heavy Truck 14,001-33,000 lbs	3-Axle Truck	0.014	8	0.026	14
Heavy-Heavy Truck 33,001-60,000 lbs	4+-Axle Truck	0.016	9	0.079	43
Other Bus	--	0.001	0	0.000	0
Urban Bus	--	0.000	0	0.000	0
Motorcycle	Automobile	0.023	13	0.022	12
School Bus	--	0.001	1	0.000	0
Motor Home	--	0.006	3	0.000	0
Total		**1.0**	**544**	**1.0**	**544**

Notes:

(1) Source: CalEEMod Version 2022.1.1.14 default values for Opening year of 2025.

(2) Revised per the vehicle mix provided in the Trip Generation Comparison (Ganddin Group, Inc., April 7, 2023) of 87.5% Autos, 2% 2-Axle Trucks, 2.6% 3-Axle Trucks and 7.9% 4+ Axle Trucks.

Table 10
Regional Operational Pollutant Emissions

Activity	Pollutant Emissions (pounds/day)					
	ROG	NOx	CO	SO2	PM10	PM2.5
Maximum Daily Emissions	12.20	10.30	57.40	0.15	10.30	2.85
SCAQMD Thresholds	55	55	550	150	150	55
Exceeds Threshold?	No	No	No	No	No	No

Notes:

Source: CalEEMod Version 2022.1.1.14; the higher of either summer or winter emissions.

Table 11
Local Operational Emissions at the Nearest Receptors

	On-Site Pollutant Emissions (pounds/day)[1]			
On-Site Emission Source	NOx	CO	PM10	PM2.5
Area Sources[2]	0.11	13.10	0.02	0.02
Energy Usage[3]	1.54	1.30	0.12	0.12
Vehicle Emissions[4]	0.75	4.14	1.01	0.27
Offroad[5]	1.11	1.56	0.06	0.05
Stationary[6]	0.09	0.08	0.01	0.01
Total Emissions	3.60	20.18	1.22	0.46
SCAQMD Thresholds[7]	270	1,577	4	2
Exceeds Threshold?	No	No	No	No

Notes:

(1) Source: Calculated from CalEEMod and SCAQMD's Mass Rate Look-up Tables for 5 acres in SRA 24.

(2) Area sources consist of emissions from consumer products, architectural coatings, and landscaping equipment.

(3) Energy usage consists of emissions from on-site natural gas usage.

(4) On-site vehicular emissions based on 1/10 of the gross vehicular emissions and road dust.

(5) Offroad sources consist of emissions from the daily operation of two CNG forklifts for 6 hours a day.

(6) Stationary sources consist of emissions from the occassional testing/use of an emergency generator and an emergency fire pump .

(7) The nearest sensitive receptors are the existing single-family residential dwelling units and mobile home park located adjacent to the west of the project site; therefore, the 25 meter threshold was used.

CUMULATIVE AIR QUALITY IMPACTS

There are a number of cumulative projects in the project area that have not yet been built or are currently under construction. Since the timing or sequencing of the cumulative projects is unknown, any quantitative analysis to ascertain daily construction emissions that assumes multiple, concurrent construction projects would be speculative. Further, cumulative projects include local development as well as general growth within the project area. However, as with most development, the greatest source of emissions is from mobile sources, which travel well out of the local area. Therefore, from an air quality standpoint, the cumulative analysis would extend beyond any local projects and when wind patterns are considered would cover an even larger area. The SCAQMD recommends using two different methodologies: (1) that project-specific air quality impacts be used to determine the potential cumulative impacts to regional air quality;[13] and (2) that a project's consistency with the current AQMP be used to determine its potential cumulative impacts.

Project Specific Impacts

The Proposed Project is located within the Perris Valley Commerce Center Specific Plan (PVCCSP) planning area. The PVCCSP was approved pursuant to a certified Environmental Impact Report (EIR) on 1/10/2012.[14] The project area is out of attainment for ozone, PM10, and PM2.5. Construction and operation of cumulative projects will further degrade the local air quality, as well as the air quality of the South Coast Air Basin. The greatest cumulative impact on the quality of regional air cell will be the incremental addition of pollutants mainly from increased traffic volumes from residential, commercial, and industrial development and the use of heavy equipment and trucks associated with the construction of these projects. Air quality will be temporarily degraded during construction activities that occur separately or simultaneously. However, in accordance with the SCAQMD methodology, projects that do not exceed the SCAQMD criteria or can be mitigated to less than criteria levels are not significant and do not add to the overall cumulative impact. This applies to TACs as well, as the SCAQMD does not have any cumulative TAC thresholds; therefore, projects that do not exceed the SCAQMD TAC threshold criteria or can be mitigated to less than criteria levels are not significant and do not add to the overall cumulative impact. A significant impact may occur if a project would add a cumulatively considerable contribution of a federal or state non-attainment pollutant.

Project operations would generate emissions of NOx, ROG, CO, PM10, and PM2.5, which, would not exceed the SCAQMD regional or local thresholds and would not be expected to result in ground level concentrations that exceed the NAAQS or CAAQS. As shown in Section 3 of this report, the project will not be a source of significant TACs from project-source DPM emissions and will not cause and significant cancer or non-cancer-related health risks. Since the project would not introduce any substantial stationary sources of emissions, CO is the benchmark pollutant for assessing local area air quality impacts from post-construction motor vehicle operations. As indicated earlier, no violations of the state and federal CO standards are projected to occur for the project, based on the magnitude of traffic the project is anticipated to create.

Therefore, operation of the project would not result in a cumulatively considerable net increase for non-attainment of criteria pollutants or ozone precursors, or TACs. As a result, the project would result in a less than significant cumulative impact for operational emissions.

Air Quality Compliance

The California Environmental Quality Act (CEQA) requires a discussion of any inconsistencies between a proposed project and applicable General Plans and Regional Plans (CEQA Guidelines Section 15125). The regional plan that applies to the proposed project includes the SCAQMD Air Quality Management Plan (AQMP). Therefore, this section discusses any potential inconsistencies of the proposed project with the AQMP.

[13] South Coast Air Quality Management District, Potential Control Strategies to Address Cumulative Impacts from Air Pollution White Paper, 1993, http://www.aqmd.gov/home/regulations/ceqa/air-quality-analysis-handbook.

[14] Ordinance Number 1284. Accessed at: https://www.cityofperris.org/home/showpublisheddocument/2923/637250482796800000

The purpose of this discussion is to set forth the issues regarding consistency with the assumptions and objectives of the AQMP and discuss whether the proposed project would interfere with the region's ability to comply with Federal and State air quality standards. If the decision-makers determine that the proposed project is inconsistent, the lead agency may consider project modifications or inclusion of mitigation to eliminate the inconsistency.

The SCAQMD CEQA Handbook states that "New or amended General Plan Elements (including land use zoning and density amendments), Specific Plans, and significant projects must be analyzed for consistency with the AQMP". Strict consistency with all aspects of the plan is usually not required. A proposed project should be considered to be consistent with the AQMP if it furthers one or more policies and does not obstruct other policies. The SCAQMD CEQA Handbook identifies two key indicators of consistency:

(1) Whether the project will result in an increase in the frequency or severity of existing air quality violations or cause or contribute to new violations, or delay timely attainment of air quality standards or the interim emission reductions specified in the AQMP.
(2) Whether the project will exceed the assumptions in the AQMP in 2022 or increments based on the year of project buildout and phase.

Both of these criteria are evaluated in the following sections.

Criteria 1 – Increase in the Frequency or Severity of Violations

Based on the air quality modeling analysis contained in this Air Analysis, short-term construction impacts will not result in significant impacts based on the SCAQMD regional and local thresholds of significance. This Air Analysis also found that, long-term operations impacts will not result in significant impacts based on the SCAQMD local and regional thresholds of significance.

Therefore, the proposed project is not projected to contribute to the exceedance of any air pollutant concentration standards and is found to be consistent with the AQMP for the first criterion.

Criteria 2 – Exceed Assumptions in the AQMP?

Consistency with the AQMP assumptions is determined by performing an analysis of the proposed project with the assumptions in the AQMP. The emphasis of this criterion is to ensure that the analyses conducted for the proposed project are based on the same forecasts as the AQMP. The 2020-2045 Regional Transportation/Sustainable Communities Strategy prepared by SCAG (2020) includes chapters on: the challenges in a changing region, creating a plan for our future, and the road to greater mobility and sustainable growth. These chapters currently respond directly to federal and state requirements placed on SCAG. Local governments are required to use these as the basis of their plans for purposes of consistency with applicable regional plans under CEQA. For this project, the City of Perris Land Use Plan defines the assumptions that are represented in the AQMP.

The project site has a Land Use Designation in the Perris Valley Commerce Center Specific Plan of Light Industrial. The project proposes to develop the site with a 301,101 square foot warehouse. Therefore, the proposed project is consistent with the City's land use designation. The proposed project is not anticipated to exceed the AQMP assumptions for the project site and is found to be consistent with the AQMP for the second criterion.

Based on the above, the proposed project will not result in an inconsistency with the SCAQMD AQMP. Therefore, a less than significant impact will occur.

3. DIESEL EMISSIONS HEALTH RISK ASSESSMENT

The on-going operation of the proposed project would generate toxic air contaminant emissions from diesel truck emissions created by the on-going operations of the proposed project. According to SCAQMD methodology, health effects from carcinogenic air toxics are usually described in terms of individual cancer risk. "Individual Cancer Risk" is the likelihood that a person exposed to concentrations of toxic air contaminants over a 30-year lifetime will contract cancer, based on the use of revised Office of Environmental Health Hazard Assessment (OEHHA) risk-assessment methodology.[15]

A health risk assessment requires the completion and interaction of four general steps:

(1) Quantify project-generated TAC emissions.
(2) Identify nearby ground-level receptor locations that may be affected by the emissions (including any special sensitive receptor locations such as residences, schools, hospitals, convalescent homes, and daycare centers).
(3) Perform air dispersion modeling analyses to estimate ambient pollutant concentrations at each receptor location using project TAC emissions and representative meteorological data to define the transport and dispersion of those emissions in the atmosphere.
(4) Characterize and compare the calculated health risks with the applicable health risk significance thresholds.

EMISSIONS INVENTORY DEVELOPMENT

Important issues that affect the dispersion modeling include the following: (1) Model Selection, (2) Source Treatment, (3) Meteorological Data, and (4) Receptor Grid. Each of these issues is addressed below.

Emission Source Estimates – On-Site Stationary Sources

Stationary sources of DPM include emissions from the occasional use/testing of a 400 HP emergency back-up generator[16] 12 hours a year and 200 HP emergency fire pump 12 hours a year.

Emission Source Estimates – DPM for Motor Vehicles

DPM emissions from the various sources were calculated using information derived from the project description, and mobile source emission factors from the CARB EMFAC2021 emissions factor model. Truck mix information was obtained from the Redlands West Industrial Project Traffic Impact Analysis (TIA) prepared by Ganddini Group, Inc. (March 8, 2022).[17]

Four pieces of information are required to generate the mobile source emissions from the proposed project:

[15] In February 2015, the Office of Environmental Health Hazard Assessment updated their "Air Toxics Hot Spots Program, Risk Assessments Guidelines, Guidance Manual for Preparation of Health Risk Assessments; however, the updated OEHHA guidance states in the page footers "do not cite or quote." SCAQMD staff have incorporated the updates into their methodology for SCAQMD's Rules 1401, 1401.1, 1402, and 212, and have updated their HRA Guidance for permitting; however they are still in the process of updating the guidance for CEQA analyses (via working group sessions); however, to be conservative, the new OEHHA guidance was used to assess HRA impacts in this analysis. Per SCAQMD staff (personal communication with Dr. Jillian Wong 6-19-2015 and 12-22-15), updated SCAQMD HRA guidance will be forthcoming.

[16] It is unknown if an emergency generator will be installed on-site; however, to be conservative an analyze the worst-case, emissions from the use of a 400 HP diesel emergency generator were included in this analysis.

[17] As previously stated, the most-recent Trip Generation Comparison prepared by Ganddini Group (April 7, 2023) was based on an earlier version of project site plan. The total square footage of the project analyzed in the Trip Generation Comparison is 301,443 square feet whereas the most recent site plan, used in this analysis, (dated July 17, 2023) has the total building square footage at 301,101 square feet. Therefore, as the trip generation from the original TIA (dated March 8, 2022) is based on a slightly larger building, it is more conservative, is considered to be worst-case; therefore, it has been utilized in this HRA analysis

- Number of vehicle trips for each component of the proposed project;
- Types of vehicles that access the proposed project (passenger car vs. heavy-duty truck and gasoline vs. diesel);
- The allocation of the vehicle trips to each building that comprises the proposed project; and
- Estimate of the vehicle emission factors for estimating exhaust and idling emissions.

Estimate of Vehicle Trips and Vehicle Types

The latest Trip Generation Comparison (TIA) shows the project is expected to generate approximately 544 (non-passenger car equivalents) vehicle trips per day. Of those vehicle trips, 476 are automobile round trips, 11 are 2-axle truck round trips, 14 are 3-axle truck round trips, and 43 are 4+-axle truck round trips per day (non-passenger car equivalents).

The March 8, 2022 TIA showed the project is expected to generate approximately 605 (non-passenger car equivalents) vehicle trips per day. Of those vehicle trips, 442 are automobile round trips, 27 are 2-axle truck round trips, 34 are 3-axle truck round trips, and 102 are 4+-axle truck round trips per day (non-passenger car equivalents). To be conservative, the HRA below is based on the higher number of truck trips from the March 8, 2022 TIA.

Estimate of Emission Factors

The stationary sources emissions from the occasional use/testing of a 400 HP emergency back-up generator[18] 12 hours a year and 200 HP emergency fire pump 12 hours a year were calculated from the CalEEMod annual output Exhaust PM-10 operational emissions for stationary sources.[19] The emissions of 0.00087 tons/year were converted into grams/sec. The total size of the emissions area was estimated to be 21,335.1 m^2 (approximately the area of the warehouse as the back-up generator and fire pump were assumed to be within or directly adjacent to the warehouse). See Table 12 for the emissions factor used.

The DPM emission factors for the various vehicle types were derived from the CARB EMFAC2021mobile source emission model. The emissions factors were derived for Riverside County. Third trimester exposure used opening year (2023) emissions factors, 2-year factors (for infant exposure) reflect years 2024 and 2025, 14-year average factors (for child exposure during years 2-16) reflect emissions during the first 14 years of operation (2026 to 2039), the second 14 years of exposure (years 2040-2053) were used for assessment of exposure during years 16 to 30.[20]

Emissions factors were estimated to establish the emissions generated while the vehicles travel off-site, along travel links from the entrance to the loading docks, and while idling at the loading dock during loading or unloading materials. All vehicles were assumed to travel on-site at a speed of 10 miles per hour. Off-site, the speeds along the roads were anticipated to average 35 miles per hour. Delivery vehicles were assumed to idle for a maximum of 15 minutes per vehicle per day (5 minutes per location: at the facility entrance, at the loading bay/truck parking area, and at the facility exit, in keeping with the CARB Air Toxic Control Measure (ATCM), which regulates truck idling time (CARB 2005)). The four different sets of emissions factors used in this assessment are detailed in Table 12. It should be noted that the DPM emissions on both the gram per mile

[18] It is unknown if an emergency generator will be installed on-site; however, to be conservative an analyze the worst-case, emissions from the use of a 400 HP diesel emergency generator were included in this analysis.

[19] The HRA modeling used in this analysis was conducted as part of the Redlands Avenue West Industrial Project Air Quality, Greenhouse Gas, Energy, and HRA Technical Memorandum prepared by Ganddini Group, Inc. (April 6, 2023). Therefore, the CalEEMod output used for the basis of the stationary sources was that provided in the previous version of this report, Redlands Avenue West Industrial Project Air Quality, Global Climate Change, HRA and Energy Impact Analysis prepared by Ganddini Group, Inc. (August 26, 2021 as revised December 15, 2022).

[20] The HRA was modeled based on an opening year of 2023; however, the proposed project is now anticipated to be operational in year 2025. The operational year used in the modeling is conservative (as emissions become cleaner as time progresses); therefore, the HRA is considered to reflect worst-case, and was not revised for updated opening year of 2025.

and gram per idle hour bases decline beyond 2023 for all vehicle classes and in particular the heavy-heavy-duty truck class (the 4+ axle "big rig" trucks). This is due to the CARB emissions' requirements on heavy-duty trucks that call for either the replacement of older trucks with cleaner trucks or the installation of diesel particulate matter filters on the truck fleet.

Emission Source Characterization

Each of the emission source types described above also requires geometrical and emission release specifications for use in the air dispersion model. Table 13 provides a summary of the assumptions used to configure the various emission sources. The following definitions are used to characterize the emission source geometrical configurations referred to in Table 13:

- Point source: A single, identifiable, local source of emissions; it is approximated in the AERMOD air dispersion model as a mathematical point in the modeling region with a location and emission characteristics such as height of release, temperature, etc., for example, a truck idle location where emissions are sourced from the truck's exhaust stack while the vehicle is stationary.

- Line source: A series of volume sources along a path, for example, vehicular traffic volumes along a roadway.

- Area source: An area of specific size where emissions are evenly distributed over the entire area.

Figure 3 provides the location of the project buildings, emission source locations, and the locations of the nearest sensitive receptors (the existing single-family residential dwelling units and mobile home park located adjacent to the west and the single-family residential use located approximately 323 feet southeast of the project site (east of Redlands Avenue), and the single-family residential uses located approximately 780 feet north (north of Rider Street) of the project site. Residential receptors are shown as orange triangles labeled 1 through 8. The direction of on-site and off-site truck travel were obtained from the site plan, TIA, and City truck routes.

RECEPTOR NETWORK

The assessment requires that a network of receptors be specified where the impacts can be computed at the various locations surrounding the project. Receptors were located at existing sensitive receptors surrounding the proposed project (as detailed above). In addition, the identified sensitive receptor locations were supplemented by the specification of a modeling grid that extended around the proposed project to identify other potential locations of impact. The locations of the receptors are shown as orange triangles on Figure 3.

DISPERSION MODELING

The next step in the assessment process utilizes the emissions inventory along with a mathematical air dispersion model and representative meteorological data to calculate impacts at the various receptor locations. The dispersion model used in this assessment is described below.

Model Selection

The assessment of air quality and health risk impacts from pollutant emissions from this project applied the USEPA AERMOD Model, which is the air dispersion model accepted by the SCAQMD for performing air quality impact analyses. AERMOD predicts pollutant concentrations from point, area, volume, line, and flare sources with variable emissions in terrain from flat to complex with the inclusion of building downwash effects from buildings on pollutant dispersion. It captures the essential atmospheric physical processes and provides reasonable estimates over a wide range of meteorological conditions and modeling scenarios.

General Model Assumptions

A summary of Emission Configurations is shown in Table 13. The basic options used in the dispersion modeling are summarized in Table 14.

As indicated in Table 14 the analysis takes into account the effects of building downwash on the dispersion of emissions from the various sources located on the project's property. Building downwash occurs when the aerodynamic turbulence, induced by nearby buildings, causes pollutants emitted from an elevated source to be mixed rapidly toward the ground (downwash), resulting in potentially higher ground-level concentrations than if the buildings were not present. The AERMOD dispersion model contains algorithms to account for building downwash effects. The required information includes the location of the emission source; the location of adjacent buildings; and the building geometry in terms of length, width, and height. For purposes of this analysis, the emission source and building locations were taken from the latest project site plan. The proposed building geometries were obtained from the project plans, assuming a building height of approximately 36 feet.

Meteorological Data

Meteorological data (processed with the ADJ_U option) from the Air District's Perris monitoring site was selected for this modeling application. Five full years of sequential meteorological data was collected at the site from January 1, 2012 to December 31, 2016 by the SCAQMD. The SCAQMD processed the data for input to the model. The data was obtained at SCAQMD's https://www.aqmd.gov/home/air-quality/air-quality-data-studies/meteorological-data/data-for-aermod (see Figure 4).

ESTIMATION OF HEALTH RISKS

Health risks from diesel particulate matter are twofold. First, diesel particulate matter is a carcinogen according to the State of California. Second, long-term chronic exposure to diesel particulate matter can cause health effects to the respiratory system. Each of these health risks is discussed below.

Cancer Risks

According to the *Risk Assessment Guidelines: Guidance Manual for Preparation of Health Risk Assessments*, released by the Office of Environmental Health Hazard Assessment (OEHHA) in February 2015 and formally adopted in March 2015, the residential inhalation dose for cancer risk assessment should be calculated using the following formula:

[Dose-air (mg/(Kg-day)]*Cancer Potency*[1x10^{-6}] = Potential Cancer Risk

Where:
Cancer Potency Factor = 1.1
Dose-inh = (C¬air * DBR * A * EF * ED *ASF*FAH* 10-6) / AT

Where:
Cair [Concentration in air (µg/m3)] = (Calculated by AERMOD Model)
DBR [Daily breathing rate (L/kg body weight – day)] = 261 for adults, 572 for children, and 1,090 for infants, and 361 for 3rd trimester per SCAQMD Permit Application Package "N" Table 4.1 D guidance.
A [Inhalation absorption factor] = 1
EF [Exposure frequency (days/year)] = 350
ED [Exposure duration (years)] = 30 for adults (for an individual who is an adult at opening year), 14 for children (from 2-16 years), 14 for adults (from 16-30 years), 2 for infants, and 1 for 3rd Trimester
ASF [Age sensitivity factor) = 10 for 3rd trimester to 2 years of age, 3 for 2 to 16 years of age, and 1 for 16 to 30 years of age

FAH [Fraction of time spent at home] = 1 for 3rd trimester to 2 years of age, 1 for 2 to 16 years of age, and 0.73 for 16 to 30 years of age
10^6 [Micrograms to milligrams conversion]
AT [Average time period over which exposure is averaged in days] = 25,550

The model run results are shown in Appendix B. Figure 5 illustrates the cancer risk to the most affected age-group, infants (0-2 years).

Table 15 shows the cancer risk for the unborn child during the 3rd trimester, Table 16 shows the cancer risk to infants (0-2 years), Table 17 shows the cancer risk to children ages 2 to 16 years and Table 18 shows the cancer risk as that child becomes an adult (years 16-30). The highest cancer risk corresponds to infant cancer risk 0-2 years (see Table 16), and is at receptor 4, with a maximum risk of 1.24 in one million. The highest 3rd trimester cancer risk 0-2 years is at receptors 3 to 5; with a maximum risk of 0.05 in one million, the highest child 2-16 years cancer risk is also at receptor 4; with a maximum risk of 1.12 in one million, and the highest adult cancer risk 16-30 years is at receptors 3 and 4. Therefore, no infants, children, or adults are exposed to cancer risks in excess of 10 in a million.

The assessment of cancer-related health risk to sensitive receptors within the project vicinity is based on the following most-conservative scenario:

An unborn child in its 3rd trimester is potentially exposed to DPM emissions (via exposure of the mother) during the opening year. That child is born opening year and then remains at home for the entire first two years of life. From age 2 to 16, the child remains at home 100 percent of the time. From age 16 to 30, the child continues to live at home, growing into an adult that spends 73 percent of its time at home and lives there until age 30.

Based on the above, ultra-conservative assumptions, the 30.25-year, cumulative carcinogenic health risk (3rd trimester [-0.25 to 0 years] + infant [0-2 years] + child [2-16 years] + adult [16-30 years]) to an individual born during the opening year of the project, and located in the project vicinity for the entire 30-year duration, is a maximum of 2.53 in a million at receptor location 4, as shown in Table 19. Therefore, as the residential cancer risk does not exceed 10 in a million the on-going operations of the proposed project would result in a less than significant impact due to the cancer risk from diesel emissions created by the proposed project.

Non-Cancer Risks

The relationship for non-cancer health effects is given by the equation:

HIDPM = CDPM/RELDPM

Where,

HIDPM	=	Hazard Index; an expression of the potential for non-cancer health effects.
CDPM	=	Annual average diesel particulate matter concentration in µg/m3.
RELDPM	=	Reference Exposure Level (REL) for diesel particulate matter; the diesel particulate matter concentration at which no adverse health effects are anticipated.

The non-carcinogenic hazards to adult, child and infant receptors are also detailed in Tables 15 through 18 column (j). The RELDPM is 5 µg/m3. The Office of Environmental Health Hazard Assessment as protective for the respiratory system has established this concentration. Using the maximum DPM concentration from years 2023-2053, the resulting Hazard Index is:

HIDPM = 0.00402/5 = 0.0008

The criterion for significance is a Hazard Index increase of 1.0 or greater. Therefore, the on-going operations of the proposed project would result in a less than significant impact due to the non-cancer risk from diesel emissions created by the proposed project.

Table 12
DPM Emissions Factors for the Proposed Project

Emergency diesel fuel fire pump and generator	1.1741E-9 g/m^2/sec

Notes:

Source: Calculated from CalEEMod Annual Output PM-10 exhaust emissions for stationary souce.

Vehicle Class	1-Year Average (Opening Year 2023)		
	On-Site Travel (g/mi)	Off-Site Travel (g/mi)	Idling (g/hr)
Light Heavy Duty Truck 2	0.05961	0.02374	0.77884
Medium Heavy Duty Truck	0.04522	0.01037	0.08675
Heavy Heavy Duty Truck	0.01258	0.00856	0.01631

Vehicle Class	2-Year Average (2024-25)		
	On-Site Travel (g/mi)	Off-Site Travel (g/mi)	Idling (g/hr)
Light Heavy Duty Truck 2	0.05232	0.02124	0.77760
Medium Heavy Duty Truck	0.03520	0.00833	0.06652
Heavy Heavy Duty Truck	0.01198	0.00811	0.01500

Vehicle Class	First 14 -Year Average (2026-2039)		
	On-Site Travel (g/mi)	Off-Site Travel (g/mi)	Idling (g/hr)
Light Heavy Duty Truck 2	0.03945	0.01734	0.76899
Medium Heavy Duty Truck	0.01154	0.00340	0.02150
Heavy Heavy Duty Truck	0.00969	0.00658	0.01135

Vehicle Class	Second 14 -Year Average (2040-2053)		
	On-Site Travel (g/mi)	Off-Site Travel (g/mi)	Idling (g/hr)
Light Heavy Duty Truck 2	0.03556	0.01660	0.76156
Medium Heavy Duty Truck	0.00328	0.00154	0.00743
Heavy Heavy Duty Truck	0.00821	0.00565	0.00975

Notes:

Source: EMFAC2021.

Table 13
Summary of Emission Configurations

Emission Source Type	Geometric Configuration	Relevant Assumptions
On-Site Stationary Source	Area Source	Assumes that release height is ~ 3 feet and that emergency pumps and emergency back-up generators will be in or adjacent to the building.
Off-Site Diesel Truck Traffic	Line Sources	Stack release height: 3.5 m
		Vehicle speed: 35 mph
		Length of the line source along Redlands Avenue
		Vehicle types: heavy-heavy-duty, medium-heavy-duty and light-heavy-duty diesel delivery trucks
		Emission factor: CARB EMFAC2021
On-Site Diesel Truck Traffic	Line Sources	Stack release height: 3.5 m
		Vehicle speed: 10 mph
		Length of the line source (from the northern driveway around the building to the southern driveway)
		Vehicle types: heavy-heavy-duty, medium-heavy-duty and light-heavy-duty diesel delivery trucks
		Emission factor: CARB EMFAC2021
On-Site Diesel Truck Idling	Point Source located at Project Buildings	Stack release height: 3.5 m
		Stack release characteristics
		> Stack diameter: 0.1 meter (0.3 feet)
		> Stack velocity: 51.9 mps (170 feet/sec)
		> Stack temperature: 366 °k (200° F)
		Idle time: 15 minutes per truck per day
		Vehicle types: heavy-heavy-duty, medium-heavy-duty and light-heavy-duty diesel delivery trucks
		Emission factor: CARB EMFAC2021

Table 14
General Modeling Assumptions - AERMOD Model

Feature	Option Selected
Terrain processing	AERMAP - NED GEOTIFF 30 min
Emission source configuration	See Table 13
Regulatory dispersion options	Default
Land use	Urban
Coordinate system	UTM, Zone 11 north
Building downwash	Included in calculations
Receptor height	0 meters above ground (per OEHHA methodology)
Meteorological data	SCAQMD Perris Meteorological Data

Table 15
Carcinogenic Risks and Non-Carcinogenic 3rd Trimester Exposure Scenario (0.25-Year)

Receptor ID (a)	Maximum Concentration (ug/m3) (b)	Maximum Concentration (mg/m3) (c)	Weight Fraction (d)	Contaminant (e)	Carcinogenic Hazards CPF (mg/kg/day) (f)	Carcinogenic Hazards RISK (per million) (g)	Noncarcinogenic Hazards REL (ug/m3) (h)	Noncarcinogenic Hazards RfD (mg/kg/day) (i)	Noncarcinogenic Hazards Index (j)
1	0.0022	2.2E-06	1.00E+00	DPM	1.1E+00	0.03	5.0E+00	1.4E-03	0.0004
2	0.00269	2.7E-06	1.00E+00	DPM	1.1E+00	0.04	5.0E+00	1.4E-03	0.0005
3	0.00388	3.9E-06	1.00E+00	DPM	1.1E+00	0.05	5.0E+00	1.4E-03	0.0008
4	0.00402	4.0E-06	1.00E+00	DPM	1.1E+00	0.05	5.0E+00	1.4E-03	0.0008
5	0.00352	3.5E-06	1.00E+00	DPM	1.1E+00	0.05	5.0E+00	1.4E-03	0.0007
6	0.00289	2.9E-06	1.00E+00	DPM	1.1E+00	0.04	5.0E+00	1.4E-03	0.0006
7	0.00191	1.9E-06	1.00E+00	DPM	1.1E+00	0.03	5.0E+00	1.4E-03	0.0004
8	0.00195	2.0E-06	1.00E+00	DPM	1.1E+00	0.03	5.0E+00	1.4E-03	0.0004

Notes:

OEHHA 95th percentile Exposure factors used to calculate TAC intake:

Exposure Frequency (days/year)	350
Exposure Duration (years)	0.25
Daily Breathing Rate	361
Age Sensitivity Factor	10
Fraction of Time At Home (FAH)	1
Averaging Time $_{(cancer)}$ (days)	25550
Averaging Time $_{(non\text{-}cancer)}$ (days)	91.25

E= 10^{X}, i.e. E-02 = 10^{-2}

Table 16
Carcinogenic Risks and Non-Carcinogenic Infant Exposure Scenario (2-Year)

Receptor ID (a)	Maximum Concentration (ug/m3) (b)	Maximum Concentration (mg/m3) (c)	Weight Fraction (d)	Contaminant (e)	Carcinogenic Hazards CPF (mg/kg/day) (f)	Carcinogenic Hazards RISK (per million) (g)	Noncarcinogenic Hazards REL (ug/m3) (h)	Noncarcinogenic Hazards RfD (mg/kg/day) (i)	Noncarcinogenic Hazards Index (j)
1	0.00209	2.1E-06	1.00E+00	DPM	1.1E+00	0.69	5.0E+00	1.4E-03	0.0004
2	0.00253	2.5E-06	1.00E+00	DPM	1.1E+00	0.83	5.0E+00	1.4E-03	0.0005
3	0.00363	3.6E-06	1.00E+00	DPM	1.1E+00	1.19	5.0E+00	1.4E-03	0.0007
4	0.00376	3.8E-06	1.00E+00	DPM	1.1E+00	1.24	5.0E+00	1.4E-03	0.0008
5	0.0033	3.3E-06	1.00E+00	DPM	1.1E+00	1.08	5.0E+00	1.4E-03	0.0007
6	0.00278	2.8E-06	1.00E+00	DPM	1.1E+00	0.91	5.0E+00	1.4E-03	0.0006
7	0.00183	1.8E-06	1.00E+00	DPM	1.1E+00	0.60	5.0E+00	1.4E-03	0.0004
8	0.00187	1.9E-04	1.00E+00	DPM	1.1E+00	0.61	5.0E+00	1.4E-03	0.0004

Notes:

OEHHA 95th percentile Exposure factors used to calculate TAC intake

Exposure Frequency (days/year)	350
Exposure Duration (years)	2
Daily Breathing Rate	1090
Age Sensitivity Factor	10
Fraction of Time At Home (FAH)	1
Averaging Time $_{(cancer)}$ (days)	25550
Averaging Time $_{(non\text{-}cancer)}$ (days)	730

E= 10^, i.e. E-02 = 10^{-2}

Table 17
Carcinogenic Risks and Non-Carcinogenic Child Exposure Scenario (2-16 Years)

Receptor ID (a)	Maximum Concentration (ug/m3) (b)	Maximum Concentration (mg/m3) (c)	Weight Fraction (d)	Contaminant (e)	Carcinogenic Hazards CPF (mg/kg/day) (f)	Carcinogenic Hazards RISK (per million) (g)	Noncarcinogenic Hazards REL (ug/m3) (h)	Noncarcinogenic Hazards RfD (mg/kg/day) (i)	Noncarcinogenic Hazards Index (j)
1	0.00179	1.5E-03	1.00E+00	DPM	1.1E+00	0.65	5.0E+00	1.4E-03	0.0004
2	0.00214	2.3E-03	1.00E+00	DPM	1.1E+00	0.77	5.0E+00	1.4E-03	0.0004
3	0.00301	1.2E-03	1.00E+00	DPM	1.1E+00	1.09	5.0E+00	1.4E-03	0.0006
4	0.0031	1.3E-03	1.00E+00	DPM	1.1E+00	1.12	5.0E+00	1.4E-03	0.0006
5	0.00276	5.5E-04	1.00E+00	DPM	1.1E+00	1.00	5.0E+00	1.4E-03	0.0006
6	0.0025	7.3E-04	1.00E+00	DPM	1.1E+00	0.91	5.0E+00	1.4E-03	0.0005
7	0.00162	7.3E-04	1.00E+00	DPM	1.1E+00	0.59	5.0E+00	1.4E-03	0.0003
8	0.00167	1.2E-03	1.00E+00	DPM	1.1E+00	0.60	5.0E+00	1.4E-03	0.0003

Notes:

OEHHA 95th percentile Exposure factors used to calculate TAC intake

Exposure Frequency (days/year)	350
Exposure Duration (years)	14
Daily Breathing Rate	572
Age Sensitivity Factor	3
Fraction of Time At Home (FAH)	1
Averaging Time $_{(cancer)}$ (days)	25550
Averaging Time $_{(non\text{-}cancer)}$ (days)	5110

E= 10^, i.e. E-02 = 10^{-2}

Table 18
Carcinogenic Risks and Non-Carcinogenic Hazards Adult Exposure Scenario (16-30 Years)

Receptor ID (a)	Maximum Concentration (ug/m3) (b)	Maximum Concentration (mg/m3) (c)	Weight Fraction (d)	Contaminant (e)	Carcinogenic Hazards CPF (mg/kg/day) (f)	Carcinogenic Hazards RISK (per million) (g)	Noncarcinogenic Hazards REL (ug/m3) (h)	Noncarcinogenic Hazards RfD (mg/kg/day) (i)	Noncarcinogenic Hazards Index (j)
1	0.00168	1.7E-06	1.00E+00	DPM	1.1E+00	0.07	5.0E+00	1.4E-03	0.0003
2	0.00199	2.0E-06	1.00E+00	DPM	1.1E+00	0.08	5.0E+00	1.4E-03	0.0004
3	0.00277	2.8E-06	1.00E+00	DPM	1.1E+00	0.11	5.0E+00	1.4E-03	0.0006
4	0.00286	2.9E-06	1.00E+00	DPM	1.1E+00	0.11	5.0E+00	1.4E-03	0.0006
5	0.00255	2.6E-06	1.00E+00	DPM	1.1E+00	0.10	5.0E+00	1.4E-03	0.0005
6	0.0024	2.4E-06	1.00E+00	DPM	1.1E+00	0.10	5.0E+00	1.4E-03	0.0005
7	0.00154	1.5E-06	1.00E+00	DPM	1.1E+00	0.06	5.0E+00	1.4E-03	0.0003
8	0.0016	1.6E-06	1.00E+00	DPM	1.1E+00	0.06	5.0E+00	1.4E-03	0.0003

Notes:

OEHHA 95th percentile Exposure factors used to calculate TAC intake

Exposure Frequency (days/year)	350
Exposure Duration (years)	14
Daily Breathing Rate	261
Age Sensitivity Factor	1
Fraction of Time At Home (FAH)	0.73
Averaging Time $_{(cancer)}$ (days)	25550
Averaging Time $_{(non\text{-}cancer)}$ (days)	5110

E= 10^, i.e. E-02 = 10^{-2}

Table 19
Cumulative Carcinogenic Risk 30.25-Year Exposure Scenario

Receptor ID	Cumulative RISK (per million)
1	1.43
2	1.72
3	2.45
4	2.53
5	2.23
6	1.95
7	1.28
8	1.31

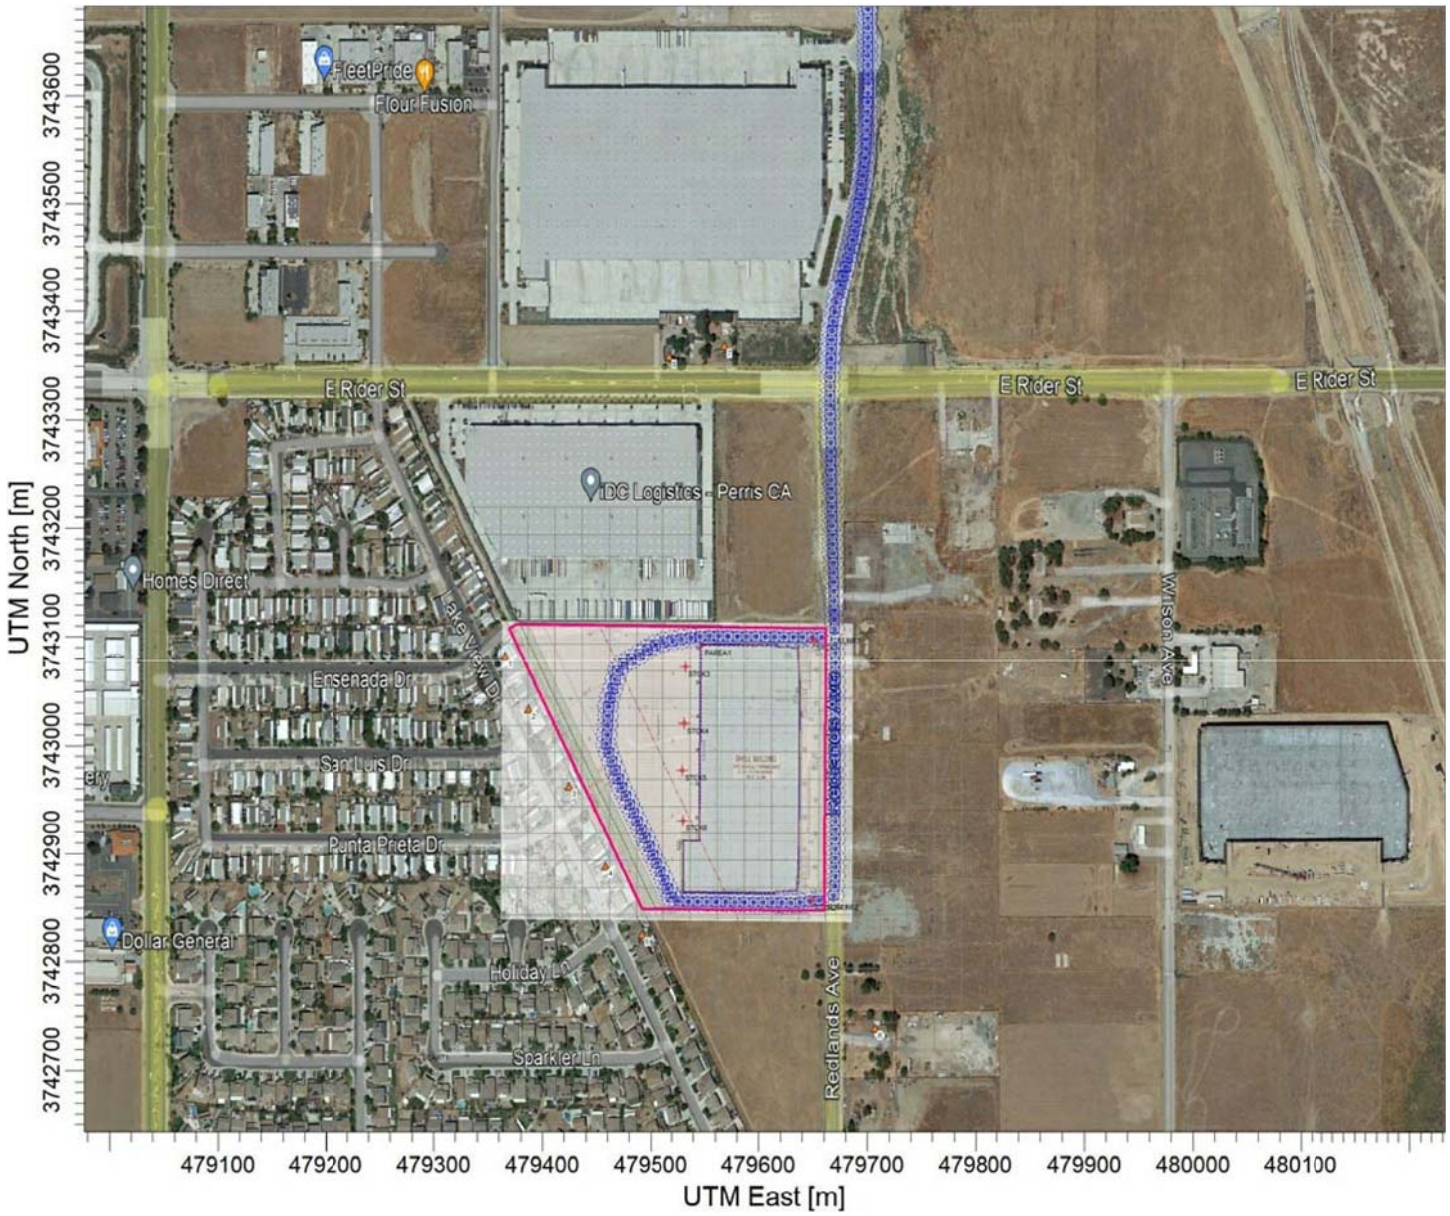

N

Legend

Project Site Boundary
On/Off Site Truck Travel
Truck Idling Locations
Discrete Receptors
Cartesian Receptors

Figure 3
AERMOD Model Source and Receptor Placement

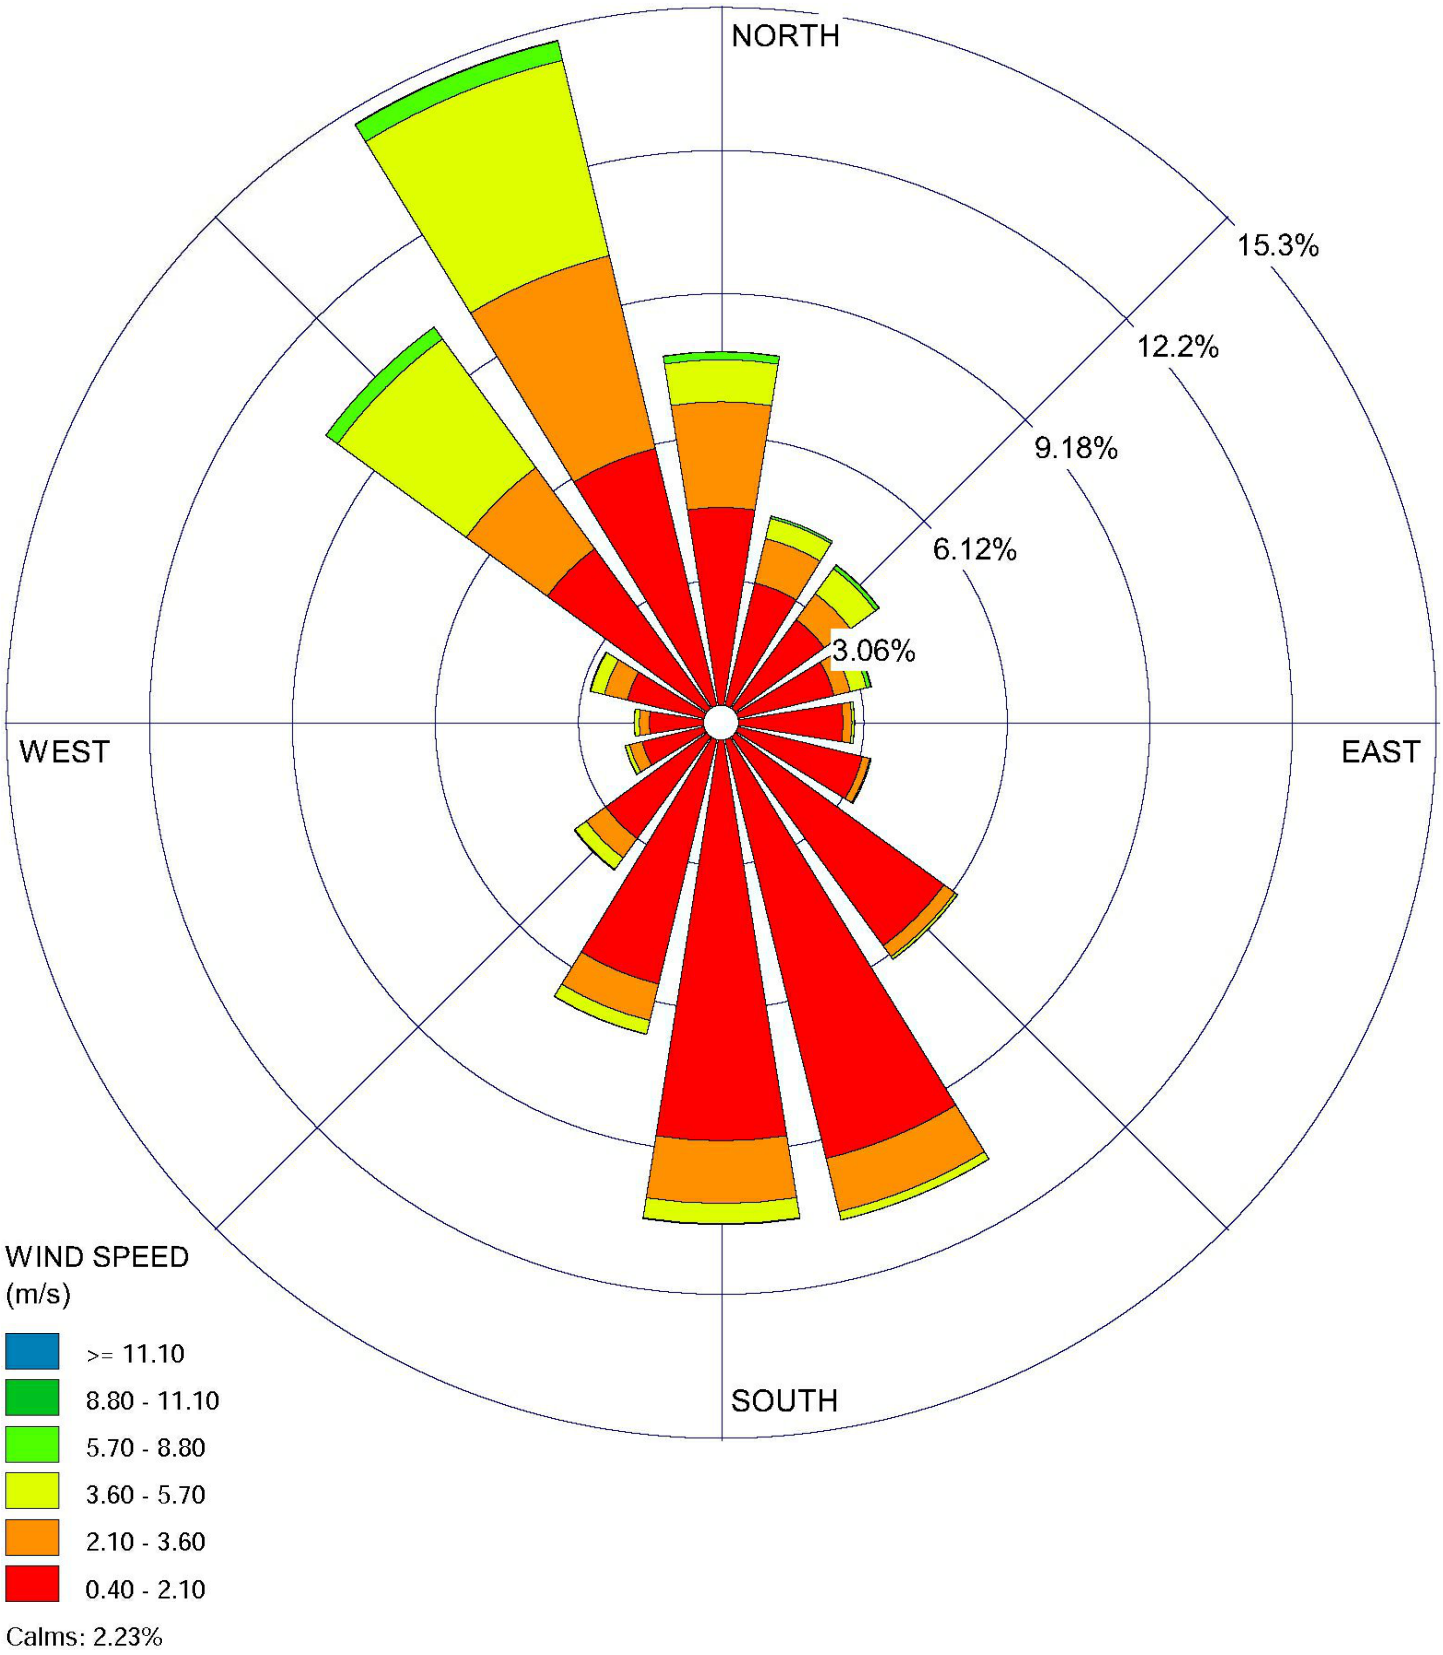

Figure 4
Wind Rose: Perris

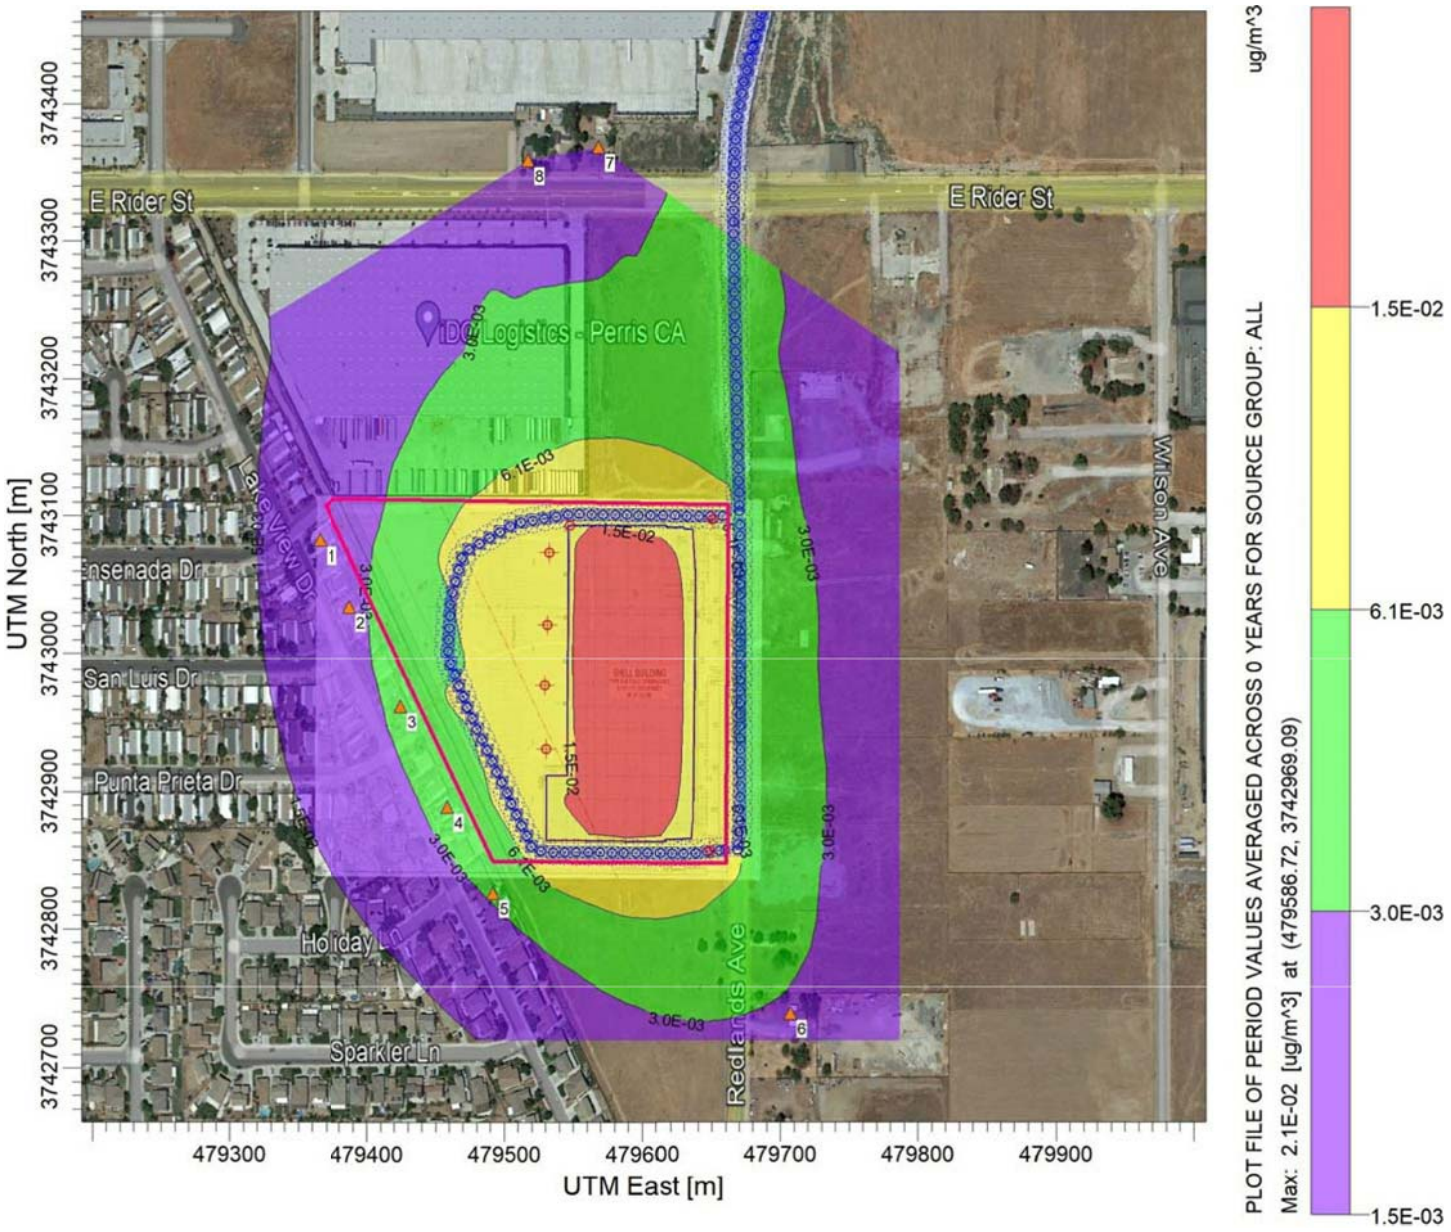

N

Legend

Cancer Risk to Infants 0-2 Years

- 5 in a million
- 2 in a million
- 1 in a million
- 0.05 in a million

Figure 5
Modeled Study Area Highest Cancer Risk from Annual DPM Emissions

4. GLOBAL CLIMATE CHANGE ANALYSIS

EXISTING GREENHOUSE GAS ENVIRONMENT

Constituent gases of the Earth's atmosphere, called atmospheric greenhouse gases (GHG), play a critical role in the Earth's radiation amount by trapping infrared radiation emitted from the Earth's surface, which otherwise would have escaped to space. Prominent greenhouse gases contributing to this process include carbon dioxide (CO_2), methane (CH_4), ozone, water vapor, nitrous oxide (N_2O), and chlorofluorocarbons (CFCs). This phenomenon, known as the Greenhouse Effect, is responsible for maintaining a habitable climate. Anthropogenic (caused or produced by humans) emissions of these greenhouse gases in excess of natural ambient concentrations are responsible for the enhancement of the Greenhouse Effect and have led to a trend of unnatural warming of the Earth's natural climate, known as global warming or climate change. Emissions of gases that induce global warming are attributable to human activities associated with industrial/manufacturing, agriculture, utilities, transportation, and residential land uses. Transportation is responsible for 41 percent of the State's greenhouse gas emissions, followed by electricity generation. Emissions of CO_2 and nitrous oxide (NOx) are byproducts of fossil fuel combustion. Methane, a potent greenhouse gas, results from off-gassing associated with agricultural practices and landfills. Sinks of CO_2, where CO_2 is stored outside of the atmosphere, include uptake by vegetation and dissolution into the ocean. The following provides a description of each of the greenhouse gases and their global warming potential.

Water Vapor

Water vapor is the most abundant, important, and variable GHG in the atmosphere. Water vapor is not considered a pollutant; in the atmosphere it maintains a climate necessary for life. Changes in its concentration are primarily considered a result of climate feedbacks related to the warming of the atmosphere rather than a direct result of industrialization. The feedback loop in which water is involved is critically important to projecting future climate change. As the temperature of the atmosphere rises, more water is evaporated from ground storage (rivers, oceans, reservoirs, soil). Because the air is warmer, the relative humidity can be higher (in essence, the air is able to "hold" more water when it is warmer), leading to more water vapor in the atmosphere. As a GHG, the higher concentration of water vapor is then able to absorb more thermal indirect energy radiated from the Earth, thus further warming the atmosphere. The warmer atmosphere can then hold more water vapor and so on and so on. This is referred to as a "positive feedback loop". The extent to which this positive feedback loop will continue is unknown as there is also dynamics that put the positive feedback loop in check. As an example, when water vapor increases in the atmosphere, more of it will eventually also condense into clouds, which are more able to reflect incoming solar radiation (thus allowing less energy to reach the Earth's surface and heat it up).

Carbon Dioxide (CO_2)

The natural production and absorption of CO_2 is achieved through the terrestrial biosphere and the ocean. However, humankind has altered the natural carbon cycle by burning coal, oil, natural gas, and wood. Since the industrial revolution began in the mid-1700s. Each of these activities has increased in scale and distribution. CO_2 was the first GHG demonstrated to be increasing in atmospheric concentration with the first conclusive measurements being made in the last half of the 20th century. Prior to the industrial revolution, concentrations were fairly stable at 280 parts per million (ppm). The International Panel on Climate Change (IPCC Fifth Assessment Report, 2014) Emissions of CO_2 from fossil fuel combustion and industrial processes contributed about 78% of the total GHG emissions increase from 1970 to 2010, with a similar percentage contribution for the increase during the period 2000 to 2010. Globally, economic and population growth continued to be the most important drivers of increases in CO_2 emissions from fossil fuel combustion. The contribution of population growth between 2000 and 2010 remained roughly identical to the previous three decades, while the contribution of economic growth has risen sharply.

Methane (CH_4)

CH_4 is an extremely effective absorber of radiation, although its atmospheric concentration is less than that of CO_2. Its lifetime in the atmosphere is brief (10 to 12 years), compared to some other GHGs (such as CO_2, N_2O, and Chlorofluorocarbons (CFCs). CH_4 has both natural and anthropogenic sources. It is released as part of the biological processes in low oxygen environments, such as in swamplands or in rice production (at the roots of the plants). Over the last 50 years, human activities such as growing rice, raising cattle, using natural gas, and mining coal have added to the atmospheric concentration of methane. Other anthropocentric sources include fossil-fuel combustion and biomass burning.

Nitrous Oxide (N_2O)

Concentrations of N_2O also began to rise at the beginning of the industrial revolution. In 1998, the global concentration of this GHG was documented at 314 parts per billion (ppb). N_2O is produced by microbial processes in soil and water, including those reactions which occur in fertilizer containing nitrogen. In addition to agricultural sources, some industrial processes (fossil fuel-fired power plants, nylon production, nitric acid production, and vehicle emissions) also contribute to its atmospheric load. It is also commonly used as an aerosol spray propellant, (i.e., in whipped cream bottles, in potato chip bags to keep chips fresh, and in rocket engines and in race cars).

Chlorofluorocarbons (CFC)

CFCs are gases formed synthetically by replacing all hydrogen atoms in methane or ethane (C_2H_6) with chlorine and/or fluorine atoms. CFCs are nontoxic, nonflammable, insoluble, and chemically unreactive in the troposphere (the level of air at the Earth's surface). CFCs have no natural source, but were first synthesized in 1928. It was used for refrigerants, aerosol propellants, and cleaning solvents. Due to the discovery that they are able to destroy stratospheric ozone, a global effort to halt their production was undertaken and in 1989 the European Community agreed to ban CFCs by 2000 and subsequent treaties banned CFCs worldwide by 2010. This effort was extremely successful, and the levels of the major CFCs are now remaining level or declining. However, their long atmospheric lifetimes mean that some of the CFCs will remain in the atmosphere for over 100 years.

Hydrofluorocarbons (HFC)

HFCs are synthetic man-made chemicals that are used as a substitute for CFCs. Out of all the GHGs, they are one of three groups with the highest global warming potential. The HFCs with the largest measured atmospheric abundances are (in order), HFC-23 (CHF_3), HFC-134a (CF_3CH_2F), and HFC-152a (CH_3CHF_2). Prior to 1990, the only significant emissions were HFC-23. HFC-134a use is increasing due to its use as a refrigerant. Concentrations of HFC-23 and HFC-134a in the atmosphere are now about 10 parts per trillion (ppt) each. Concentrations of HFC-152a are about 1 ppt. HFCs are manmade for applications such as automobile air conditioners and refrigerants.

Perfluorocarbons (PFC)

PFCs have stable molecular structures and do not break down through the chemical processes in the lower atmosphere. High-energy ultraviolet rays about 60 kilometers above Earth's surface are able to destroy the compounds. Because of this, PFCs have very long lifetimes, between 10,000 and 50,000 years. Two common PFCs are tetrafluoromethane (CF_4) and hexafluoroethane (C_2F_6). Concentrations of CF_4 in the atmosphere are over 70 ppt. The two main sources of PFCs are primary aluminum production and semiconductor manufacturing.

Sulfur Hexafluoride (SF_6)

SF_6 is an inorganic, odorless, colorless, nontoxic, nonflammable gas. SF_6 has the highest global warming potential of any gas evaluated; 23,900 times that of CO_2. Concentrations in the 1990s were about 4 ppt. Sulfur hexafluoride is used for insulation in electric power transmission and distribution equipment, in the magnesium industry, in semiconductor manufacturing, and as a tracer gas for leak detection.

Aerosols

Aerosols are particles emitted into the air through burning biomass (plant material) and fossil fuels. Aerosols can warm the atmosphere by absorbing and emitting heat and can cool the atmosphere by reflecting light. Cloud formation can also be affected by aerosols. Sulfate aerosols are emitted when fuel containing sulfur is burned. Black carbon (or soot) is emitted during biomass burning due to the incomplete combustion of fossil fuels. Particulate matter regulation has been lowering aerosol concentrations in the United States; however, global concentrations are likely increasing.

Global Warming Potential

The Global Warming Potential (GWP) was developed to allow comparisons of the global warming impacts of different gases. Specifically, it is a measure of how much energy the emissions of 1 ton of a gas will absorb over a given period of time, relative to the emissions of 1 ton of carbon dioxide (CO_2). The larger the GWP, the more that a given gas warms the Earth compared to CO_2 over that time period. The time period usually used for GWPs is 100 years. GWPs provide a common unit of measure, which allows analysts to add up emissions estimates of different gases (e.g., to compile a national GHG inventory), and allows policymakers to compare emissions reduction opportunities across sectors and gases. A summary of the atmospheric lifetime and the global warming potential of selected gases are summarized in Table 20. As shown in Table 20, the global warming potential of GHGs ranges from 1 to 22,800.

Table 20
Global Warming Potentials and Atmospheric Lifetimes

Gas	Atmospheric Lifetime	Global Warming Potential[1] (100 Year Horizon)
Carbon Dioxide (CO_2)	–[2]	1
Methane (CH_4)	12	28-36
Nitrous Oxide (NO)	114	298
Hydrofluorocarbons (HFCs)	1-270	12-14,800
Perfluorocarbons (PFCs)	2,600-50,000	7,390-12,200
Nitrogen trifluoride (NF_3)	740	17,200
Sulfur Hexafluoride (SF_6)	3,200	22,800

Notes:

Source: http://www3.epa.gov/climatechange/ghgemissions/gases.html

(1) Compared to the same quantity of CO_2 emissions.

(2) Carbon dioxide's lifetime is poorly defined because the gas is not destroyed over time, but instead moves among different parts of the ocean–atmosphere–land system. Some of the excess carbon dioxide will be absorbed quickly (for example, by the ocean surface), but some will remain in the atmosphere for thousands of years, due in part to the very slow process by which carbon is transferred to ocean sediments.

GREENHOUSE GAS STANDARDS AND REGULATION

International

Montreal Protocol

In 1988, the United Nations established the Intergovernmental Panel on Climate Change (IPCC) to evaluate the impacts of global climate change and to develop strategies that nations could implement to curtail global climate change. In 1992, the United States joined other countries around the world in signing the United Nations' Framework Convention on Climate Change (UNFCCC) agreement with the goal of controlling GHG emissions. As a result, the Climate Change Action Plan was developed to address the reduction of GHGs in the United States. The plan consists of more than 50 voluntary programs.

Additionally, the Montreal Protocol was originally signed in 1987 and substantially amended in 1990 and 1992. The Montreal Protocol stipulates that the production and consumption of compounds that deplete ozone in the stratosphere—CFCs, halons, carbon tetrachloride, and methyl chloroform—were to be phased out, with the first three by the year 2000 and methyl chloroform by 2005.

The Paris Agreement

The Paris Agreement became effective on November 4, 2016. Thirty days after this date at least 55 Parties to the United Nations Framework Convention on Climate Change (Convention), accounting in total for at least an estimated 55 % of the total global greenhouse gas emissions, had deposited their instruments of ratification, acceptance, approval or accession with the Depositary.

The Paris Agreement built upon the Convention and – for the first time – attempted to bring all nations into a common cause to undertake ambitious efforts to combat climate change and adapt to its effects, with enhanced support to assist developing countries to do so. As such, it charts a new course in the global climate effort.

The Paris Agreement's central aim is to strengthen the global response to the threat of climate change by keeping a global temperature rise this century well below 2 degrees Celsius above pre-industrial levels and to pursue efforts to limit the temperature increase even further to 1.5 degrees Celsius. Additionally, the agreement aims to strengthen the ability of countries to deal with the impacts of climate change. To reach these ambitious goals, appropriate financial flows, a new technology framework and an enhanced capacity building framework will be put in place, thus supporting action by developing countries and the most vulnerable countries, in line with their own national objectives. The Agreement also provides for enhanced transparency of action and support through a more robust transparency framework.

Federal

The United States Environmental Protection Agency (USEPA) is responsible for implementing federal policy to address GHGs. The federal government administers a wide array of public-private partnerships to reduce the GHG intensity generated in the United States. These programs focus on energy efficiency, renewable energy, methane and other non-CO2 gases, agricultural practices, and implementation of technologies to achieve GHG reductions. The USEPA implements numerous voluntary programs that contribute to the reduction of GHG emissions. These programs (e.g., the ENERGY STAR labeling system for energy-efficient products) play a significant role in encouraging voluntary reductions from large corporations, consumers, industrial and commercial buildings, and many major industrial sectors.

In Massachusetts v. Environmental Protection Agency (Docket No. 05–1120), argued November 29, 2006 and decided April 2, 2007, the U.S. Supreme Court held that not only did the EPA have authority to regulate greenhouse gases, but the EPA's reasons for not regulating this area did not fit the statutory requirements. As

such, the U.S. Supreme Court ruled that the EPA should be required to regulate CO_2 and other greenhouse gases as pollutants under the federal Clean Air Act (CAA).

In response to the FY2008 Consolidations Appropriations Act (H.R. 2764; Public Law 110-161), EPA proposed a rule on March 10, 2009 that requires mandatory reporting of GHG emissions from large sources in the United States. On September 22, 2009, the Final Mandatory Reporting of GHG Rule was signed and published in the Federal Register on October 30, 2009. The rule became effective on December 29, 2009. This rule requires suppliers of fossil fuels or industrial GHGs, manufacturers of vehicles and engines, and facilities that emit 25,000 metric tons or more per year of GHG emissions to submit annual reports to EPA.

On December 7, 2009, the EPA Administrator signed two distinct findings under section 202(a) of the Clean Air Act. One is an endangerment finding that finds concentrations of the six GHGs in the atmosphere threaten the public health and welfare of current and future generations. The other is a cause or contribute finding, that finds emissions from new motor vehicles and new motor vehicle engines contribute to the GHG pollution which threatens public health and welfare. These actions will not themselves impose any requirements on industry or other entities. However, it is a prerequisite to finalizing the EPA's proposed GHG emission standards for light-duty vehicles, which were jointly proposed by the EPA and Department of Transportation on September 15, 2009.

Clean Air Act

In Massachusetts v. Environmental Protection Agency (Docket No. 05–1120), the U.S. Supreme Court held in April of 2007 that the USEPA has statutory authority under Section 202 of the federal Clean Air Act (CAA) to regulate GHGs. The court did not hold that the USEPA was required to regulate GHG emissions; however, it indicated that the agency must decide whether GHGs cause or contribute to air pollution that is reasonably anticipated to endanger public health or welfare. On December 7, 2009, the USEPA Administrator signed two distinct findings regarding GHGs under Section 202(a) of the CAA. The USEPA adopted a Final Endangerment Finding for the six defined GHGs (CO2, CH4, N2O, HFCs, PFCs, and SF6) on December 7, 2009. The Endangerment Finding is required before USEPA can regulate GHG emissions under Section 202(a)(1) of the CAA consistently with the United States Supreme Court decision. The USEPA also adopted a Cause or Contribute Finding in which the USEPA Administrator found that GHG emissions from new motor vehicle and motor vehicle engines are contributing to air pollution, which is endangering public health and welfare. These findings do not, by themselves, impose any requirements on industry or other entities. However, these actions were a prerequisite for implementing GHG emissions standards for vehicles.

Energy Independence Security Act

The Energy Independence and Security Act of 2007 (EISA) facilitates the reduction of national GHG emissions by requiring the following:

- Increasing the supply of alternative fuel sources by setting a mandatory Renewable Fuel Standard (RFS) that requires fuel producers to use at least 36 billion gallons of biofuel in 2022;
- Prescribing or revising standards affecting regional efficiency for heating and cooling products, procedures for new or amended standards, energy conservation, energy efficiency labeling for consumer electronic products, residential boiler efficiency, electric motor efficiency, and home appliances;
- Requiring approximately 25 percent greater efficiency for light bulbs by phasing out incandescent light bulbs between 2012 and 2014; requiring approximately 200 percent greater efficiency for light bulbs, or similar energy savings, by 2020; and
- While superseded by the USEPA and NHTSA actions described above, (i) establishing miles per gallon targets for cars and light trucks and (ii) directing the NHTSA to establish a fuel economy program for medium- and heavy-duty trucks and create a separate fuel economy standard for trucks.

Additional provisions of EISA address energy savings in government and public institutions, promote research for alternative energy, additional research in carbon capture, international energy programs, and the creation of green jobs.[21]

Executive Order 13432

In response to the Massachusetts v. Environmental Protection Agency ruling, the President signed Executive Order 13432 on May 14, 2007, directing the USEPA, along with the Departments of Transportation, Energy, and Agriculture, to initiate a regulatory process that responds to the Supreme Court's decision. Executive Order 13432 was codified into law by the 2009 Omnibus Appropriations Law signed on February 17, 2009. The order sets goals in the areas of energy efficiency, acquisition, renewable energy, toxics reductions, recycling, sustainable buildings, electronics stewardship, fleets, and water conservation. Light-Duty Vehicle Greenhouse Gas and Corporate Average Fuel Economy Standards.

On May 19, 2009, President Obama announced a national policy for fuel efficiency and emissions standards in the United States auto industry. The adopted federal standard applies to passenger cars and light-duty trucks for model years 2012 through 2016. The rule surpasses the prior Corporate Average Fuel Economy standards (CAFE)[22] and requires an average fuel economy standard of 35.5 miles per gallon (mpg) and 250 grams of CO2 per mile by model year 2016, based on USEPA calculation methods. These standards were formally adopted on April 1, 2010. In August 2012, standards were adopted for model year 2017 through 2025 for passenger cars and light-duty trucks. By 2025, vehicles are required to achieve 54.5 mpg (if GHG reductions are achieved exclusively through fuel economy improvements) and 163 grams of CO2 per mile. According to the USEPA, a model year 2025 vehicle would emit one-half of the GHG emissions from a model year 2010 vehicle.[23] In 2017, the USEPA recommended no change to the GHG standards for light-duty vehicles for model years 2022-2025.

Issued by NHTSA and EPA in March 2020 (published on April 30, 2020 and effective after June 29, 2020), the Safer Affordable Fuel-Efficient Vehicles Rule would maintain the CAFE and CO2 standards applicable in model year 2020 for model years 2021 through 2026. The estimated CAFE and CO2 standards for model year 2020 are 43.7 mpg and 204 grams of CO2 per mile for passenger cars and 31.3 mpg and 284 grams of CO2 per mile for light trucks, projecting an overall industry average of 37 mpg, as compared to 46.7 mpg under the standards issued in 2012. This Rule also excludes CO2- equivalent emission improvements associated with air conditioning refrigerants and leakage (and, optionally, offsets for nitrous oxide and methane emissions) after model year 2020.[24]

On May 12, 2021, the National Highway Traffic Safety Administration (NHTSA) published a notice of proposed rulemaking in the Federal Register, proposing to repeal "The Safer Affordable Fuel-Efficient (SAFE) Vehicles Rule Part One: One National Program," published Sept. 27, 2019 (SAFE I Rule), in which NHTSA codified regulatory text and made additional pronouncements regarding the preemption of state and local laws related to fuel economy standards. Specifically, this document proposes to fully repeal the regulatory text and appendices promulgated in the SAFE I Rule. In addition, this document proposes to repeal and withdraw the interpretative statements made by the Agency in the SAFE I Rule preamble, including those

[21] A green job, as defined by the United States Department of Labor, is a job in business that produces goods or provides services that benefit the environment or conserve natural resources.

[22] The Corporate Average Fuel Economy standards are regulations in the United States, first enacted by Congress in 1975, to improve the average fuel economy of cars and light trucks. The U.S Department of Transportation has delegated the National Highway Traffic Safety Administration as the regulatory agency for the Corporate Average Fuel Economy standards.

[23] United States Environmental Protection Agency, EPA and NHTSA Set Standards to Reduce Greenhouse Gases and Improve Fuel Economy for Model Years 2017-2025 Cars and Light Trucks, August 2012, https://nepis.epa.gov/Exe/ZyPDF.cgi/P100EZ7C.PDF?Dockey=P100EZ7C.PDF.

[24] National Highway Traffic Safety Administration (NHTSA) and U.S. Environmental Protection Agency (USEPA), 2018. Federal Register / Vol. 83, No. 165 / Friday, August 24, 2018 / Proposed Rules, The Safer Affordable Fuel-Efficient (SAFE) Vehicles Rule for Model Years 2021–2026 Passenger Cars and Light Trucks 2018. Available at: https://www.gpo.gov/fdsys/pkg/FR-2018-08-24/pdf/2018-16820.pdf.

regarding the preemption of particular state Greenhouse Gas (GHG) Emissions standards or Zero Emissions Vehicle (ZEV) mandates. As such, this document proposes to establish a clean slate with respect to NHTSA's regulations and interpretations concerning preemption under the Energy Policy and Conservation Act (EPCA).[25]

State of California

California Air Resources Board

CARB, a part of the California Environmental Protection Agency (CalEPA), is responsible for the coordination and administration of both federal and state air pollution control programs within California. In this capacity, CARB conducts research, sets state ambient air quality standards (California Ambient Air Quality Standards [CAAQS]), compiles emission inventories, develops suggested control measures, and provides oversight of local programs. CARB establishes emissions standards for motor vehicles sold in California, consumer products (such as hairspray, aerosol paints, and barbecue lighter fluid), and various types of commercial equipment. It also sets fuel specifications to further reduce vehicular emissions.

In 2004, the California Air Resources Board (CARB) adopted an Airborne Toxic Control Measure to limit heavy-duty diesel motor vehicle idling in order to reduce public exposure to diesel particulate matter and other toxic air contaminants (Title 13 California Code of Regulations [CCR], Section 2485). The measure applies to diesel-fueled commercial vehicles with gross vehicle weight ratings greater than 10,000 pounds that are licensed to operate on highways, regardless of where they are registered. This measure generally does not allow diesel-fueled commercial vehicles to idle for more than 5 minutes at any given location with certain exemptions for equipment in which idling is a necessary function such as concrete trucks. While this measure primarily targets diesel particulate matter emissions, it has co-benefits of minimizing GHG emissions from unnecessary truck idling.

In 2008, CARB approved the Truck and Bus regulation to reduce particulate matter and nitrogen oxide emissions from existing diesel vehicles operating in California (13 CCR, Section 2025, subsection (h)). CARB has also promulgated emission standards for off-road diesel construction equipment of greater than 25 horsepower such as bulldozers, loaders, backhoes and forklifts, as well as many other self-propelled off-road diesel vehicles. The regulation, adopted by the CARB on July 26, 2007, aims to reduce emissions by installation of diesel soot filters and encouraging the retirement, replacement, or repower of older, dirtier engines with newer emission-controlled models. While these regulations primarily target reductions in criteria air pollutant emission, they have co-benefits of minimizing GHG emissions due to improved engine efficiencies.

The State currently has no regulations that establish ambient air quality standards for GHGs. However, the State has passed laws directing CARB to develop actions to reduce GHG emissions, which are listed below.

Assembly Bill 1493

California Assembly Bill 1493 enacted on July 22, 2002, required the CARB to develop and adopt regulations that reduce GHGs emitted by passenger vehicles and light duty trucks. In 2005, the CARB submitted a "waiver" request to the EPA from a portion of the federal Clean Air Act in order to allow the State to set more stringent tailpipe emission standards for CO_2 and other GHG emissions from passenger vehicles and light duty trucks. On December 19, 2007 the EPA announced that it denied the "waiver" request. On January 21, 2009, CARB submitted a letter to the EPA administrator regarding the State's request to reconsider the waiver denial. The EPA approved the waiver on June 30, 2009.

[25] https://www.federalregister.gov/documents/2021/05/12/2021-08758/corporate-average-fuel-economy-cafe-preemption

Executive Order S-3-05

The California Governor issued Executive Order S-3-05, GHG Emission, in June 2005, which established the following reduction targets:

- By 2010, California shall reduce GHG emissions to 2000 levels;
- By 2020, California shall reduce GHG emissions to 1990 levels; and
- By 2050, California shall reduce GHG emissions to 80 percent below 1990 levels.

The Executive Order directed the secretary of the California Environmental Protection Agency (CalEPA) to coordinate a multi-agency effort to reduce GHG emissions to the target levels. To comply with the Executive Order, the secretary of CalEPA created the California Climate Action Team (CAT), made up of members from various state agencies and commissions. The team released its first report in March 2006. The report proposed to achieve the targets by building on the voluntary actions of businesses, local governments, and communities and through State incentive and regulatory programs.

Assembly Bill 32 (California Health and Safety Code, Division 25.5 – California Global Warming Solutions Act of 2006)

In 2006, the California State Legislature adopted Assembly Bill (AB) 32 (codified in the California Health and Safety Code [HSC], Division 25.5 – California Global Warming Solutions Act of 2006), which focuses on reducing GHG emissions in California to 1990 levels by 2020. HSC Division 25.5 defines GHGs as CO2, CH4, N2O, HFCs, PFCs, and SF6 and represents the first enforceable statewide program to limit emissions of these GHGs from all major industries with penalties for noncompliance. The law further requires that reduction measures be technologically feasible and cost effective. Under HSC Division 25.5, CARB has the primary responsibility for reducing GHG emissions. CARB is required to adopt rules and regulations directing state actions that would achieve GHG emissions reductions equivalent to 1990 statewide levels by 2020.

Senate Bill 32 and Assembly Bill 197

In 2016, the California State Legislature adopted Senate Bill (SB) 32 and its companion bill AB 197, and both were signed by Governor Brown. SB 32 and AB 197 amends HSC Division 25.5 and establishes a new climate pollution reduction target of 40 percent below 1990 levels by 2030 and includes provisions to ensure the benefits of state climate policies reach into disadvantaged communities.

Climate Change Scoping Plan (2008)

A specific requirement of AB 32 was to prepare a Climate Change Scoping Plan for achieving the maximum technologically feasible and cost-effective GHG emission reduction by 2020 (Health and Safety Code section 38561 (h)). CARB developed an AB 32 Scoping Plan that contains strategies to achieve the 2020 emissions cap. The initial Scoping Plan was approved in 2008, and contains a mix of recommended strategies that combined direct regulations, market-based approaches, voluntary measures, policies, and other emission reduction programs calculated to meet the 2020 statewide GHG emission limit and initiate the transformations needed to achieve the State's long-range climate objectives.

As required by HSC Division 25.5, CARB approved the 1990 GHG emissions inventory, thereby establishing the emissions limit for 2020. The 2020 emissions limit was originally set at 427 $MMTCO_2e$ using the GWP values from the IPCC SAR. CARB also projected the state's 2020 GHG emissions under no-action-taken (NAT) conditions – that is, emissions that would occur without any plans, policies, or regulations to reduce GHG emissions. CARB originally used an average of the state's GHG emissions from 2002 through 2004 and projected the 2020 levels at approximately 596 $MMTCO_2e$ (using GWP values from the IPCC SAR). Therefore, under the original projections, the state must reduce its 2020 NAT emissions by 28.4 percent in order to meet the 1990 target of 427 $MMTCO_2e$.

First Update to the Climate Change Scoping Plan (2014)

The First Update to the Scoping Plan was approved by CARB in May 2014 and builds upon the initial Scoping Plan with new strategies and recommendations. In 2014, CARB revised the target using the GWP values from the IPCC AR4 and determined that the 1990 GHG emissions inventory and 2020 GHG emissions limit is 431 $MMTCO_2e$. CARB also updated the State's 2020 NAT emissions estimate to account for the effect of the 2007–2009 economic recession, new estimates for future fuel and energy demand, and the reductions required by regulation that were recently adopted for motor vehicles and renewable energy. CARB's projected statewide 2020 emissions estimate using the GWP values from the IPCC AR4 is 509.4 $MMTCO_2e$.

2017 Climate Change Scoping Plan

In response to the 2030 GHG reduction target, CARB adopted the 2017 Climate Change Scoping Plan at a public meeting held in December 2017. The 2017 Scoping Plan outlines the strategies the State will implement to achieve the 2030 GHG reduction target of 40 percent below 1990 levels. The 2017 Scoping Plan also addresses GHG emissions from natural and working lands of California, including the agriculture and forestry sectors. The 2017 Scoping Plan considered the Scoping Plan Scenario and four alternatives for achieving the required GHG reductions but ultimately selected the Scoping Plan Scenario.

CARB states that the Scoping Plan Scenario "is the best choice to achieve the State's climate and clean air goals."[26] Under the Scoping Plan Scenario, the majority of the reductions would result from the continuation of the Cap-and-Trade regulation. Additional reductions are achieved from electricity sector standards (i.e., utility providers to supply at least 50 percent renewable electricity by 2030), doubling the energy efficiency savings at end uses, additional reductions from the LCFS, implementing the short-lived GHG strategy (e.g., hydrofluorocarbons), and implementing the mobile source strategy and sustainable freight action plan. The alternatives were designed to consider various combinations of these programs, as well as consideration of a carbon tax in the event the Cap-and-Trade regulation is not continued. However, in July 2017, the California Legislature voted to extend the Cap-and-Trade regulation to 2030. Implementing this Scoping Plan will ensure that California's climate actions continue to promote innovation, drive the generation of new jobs, and achieve continued reductions of smog and air toxics. The ambitious approach draws on a decade of successful programs that address the major sources of climate-changing gases in every sector of the economy:

- More Clean Cars and Trucks: The plan sets out far-reaching programs to incentivize the sale of millions of zero-emission vehicles, drive the deployment of zero-emission trucks, and shift to a cleaner system of handling freight statewide.
- Increased Renewable Energy: California's electric utilities are ahead of schedule meeting the requirement that 33 percent of electricity come from renewable sources by 2020. The Scoping Plan guides utilities to 50 percent renewables, as required under SB 350.
- Slashing Super-Pollutants: The plan calls for a significant cut in super-pollutants such as methane and HFC refrigerants, which are responsible for as much as 40 percent of global warming.
- Cleaner Industry and Electricity: California's renewed cap-and-trade program extends the declining cap on emissions from utilities and industries and the carbon allowance auctions. The auctions will continue to fund investments in clean energy and efficiency, particularly in disadvantaged communities.
- Cleaner Fuels: The Low Carbon Fuel Standard will drive further development of cleaner, renewable transportation fuels to replace fossil fuels.
- Smart Community Planning: Local communities will continue developing plans which will further link transportation and housing policies to create sustainable communities.
- Improved Agriculture and Forests: The Scoping Plan also outlines innovative programs to account for and reduce emissions from agriculture, as well as forests and other natural lands.

[26] California Air Resources Board, California's 2017 Climate Change Scoping Plan, November 2017, https://www.arb.ca.gov/cc/scopingplan/scoping_plan_2017.pdf

The 2017 Scoping Plan also evaluates reductions of smog-causing pollutants through California's climate programs.

2022 Climate Change Scoping Plan

CARB adopted the 2022 Scoping Plan for Achieving Carbon Neutrality on November 16, 2022. The 2022 Scoping Plan lays out the sector-by-sector roadmap for California, the world's fifth largest economy, to achieve carbon neutrality by 2045 or earlier, outlining a technologically feasible, cost-effective, and equity-focused path to achieve the state's climate target. The Plan addresses recent legislation and direction from Governor Newsom and extends and expands upon earlier plans with a target of reducing anthropogenic emissions to 85 percent below 1990 levels by 2045. The plan also takes the unprecedented step of adding carbon neutrality as a science-based guide and touchstone for California's climate work. Specifically, this plan:

- Identifies a path to keep California on track to meet its SB 32 GHG reduction target of at least 40 percent below 1990 emissions by 2030.
- Identifies a technologically feasible, cost-effective path to achieve carbon neutrality by 2045 and a reduction in anthropogenic emissions by 85 percent below 1990 levels.
- Focuses on strategies for reducing California's dependency on petroleum to provide consumers with clean energy options that address climate change, improve air quality, and support economic growth and clean sector jobs.
- Integrates equity and protecting California's most impacted communities as driving principles throughout the document.
- Incorporates the contribution of natural and working lands (NWL) to the state's GHG emissions, as well as their role in achieving carbon neutrality.
- Relies on the most up-to-date science, including the need to deploy all viable tools to address the existential threat that climate change presents, including carbon capture and sequestration, as well as direct air capture.
- Evaluates the substantial health and economic benefits of taking action.
- Identifies key implementation actions to ensure success.

SB 32, Pavley. California Global Warming Solutions Act of 2006

(5) The California Global Warming Solutions Act of 2006 designates the State Air Resources Board as the state agency charged with monitoring and regulating sources of emissions of greenhouse gases. The state board is required to approve a statewide greenhouse gas emissions limit equivalent to the statewide greenhouse gas emissions level in 1990 to be achieved by 2020 and to adopt rules and regulations in an open public process to achieve the maximum, technologically feasible, and cost-effective greenhouse gas emissions reductions. This bill would require the state board to ensure that statewide greenhouse gas emissions are reduced to 40% below the 1990 level by 2030.

(2) This bill would become operative only if AB 197 of the 2015–16 Regular Session is enacted and becomes effective on or before January 1, 2017. AB 197 requires that the California Air Resources Board, which directs implementation of emission-reduction programs, should target direct reductions at both stationary and mobile sources. AB 197 of the 2015-2016 Regular Session was approved on September 8, 2016.

Executive Order S-1-07

Executive Order S-1-07 was issued in 2007 and proclaims that the transportation sector is the main source of GHG emissions in the State, since it generates more than 40 percent of the State's GHG emissions. It establishes a goal to reduce the carbon intensity of transportation fuels sold in the State by at least ten percent by 2020. This Order also directs the CARB to determine whether this Low Carbon Fuel Standard (LCFS) could be adopted as a discrete early-action measure as part of the effort to meet the mandates in AB 32.

On April 23, 2009 CARB approved the proposed regulation to implement the low carbon fuel standard and began implementation on January 1, 2011. The low carbon fuel standard is anticipated to reduce GHG emissions by about 16 MMT per year by 2020. CARB approved some amendments to the LCFS in December 2011, which were implemented on January 1, 2013. In September 2015, the Board approved the re-adoption of the LCFS, which became effective on January 1, 2016, to address procedural deficiencies in the way the original regulation was adopted. In 2018, the Board approved amendments to the regulation, which included strengthening and smoothing the carbon intensity benchmarks through 2030 in-line with California's 2030 GHG emission reduction target enacted through SB 32, adding new crediting opportunities to promote zero emission vehicle adoption, alternative jet fuel, carbon capture and sequestration, and advanced technologies to achieve deep decarbonization in the transportation sector.

The LCFS is designed to encourage the use of cleaner low-carbon transportation fuels in California, encourage the production of those fuels, and therefore, reduce GHG emissions and decrease petroleum dependence in the transportation sector. Separate standards are established for gasoline and diesel fuels and the alternative fuels that can replace each. The standards are "back-loaded", with more reductions required in the last five years, than during the first five years. This schedule allows for the development of advanced fuels that are lower in carbon than today's fuels and the market penetration of plug-in hybrid electric vehicles, battery electric vehicles, fuel cell vehicles, and flexible fuel vehicles. It is anticipated that compliance with the low carbon fuel standard will be based on a combination of both lower carbon fuels and more efficient vehicles.

Reformulated gasoline mixed with corn-derived ethanol at ten percent by volume and low sulfur diesel fuel represent the baseline fuels. Lower carbon fuels may be ethanol, biodiesel, renewable diesel, or blends of these fuels with gasoline or diesel as appropriate. Compressed natural gas and liquefied natural gas also may be low carbon fuels. Hydrogen and electricity, when used in fuel cells or electric vehicles are also considered as low carbon fuels for the low carbon fuel standard.

Senate Bill 97

Senate Bill 97 (SB 97) was adopted August 2007 and acknowledges that climate change is a prominent environmental issue that requires analysis under CEQA. SB 97 directed the Governor's Office of Planning and Research (OPR), which is part of the State Natural Resources Agency, to prepare, develop, and transmit to the CARB guidelines for the feasible mitigation of GHG emissions or the effects of GHG emissions, as required by CEQA, by July 1, 2009. The Natural Resources Agency was required to certify and adopt those guidelines by January 1, 2010.

Pursuant to the requirements of SB 97 as stated above, on December 30, 2009, the Natural Resources Agency adopted amendments to the state CEQA guidelines that address GHG emissions. The CEQA Guidelines Amendments changed 14 sections of the CEQA Guidelines and incorporate GHG language throughout the Guidelines. However, no GHG emissions thresholds of significance were provided and no specific mitigation measures were identified. The GHG emission reduction amendments went into effect on March 18, 2010, and are summarized below:

- Climate action plans and other greenhouse gas reduction plans can be used to determine whether a project has significant impacts, based upon its compliance with the plan.
- Local governments are encouraged to quantify the greenhouse gas emissions of proposed projects, noting that they have the freedom to select the models and methodologies that best meet their needs and circumstances. The section also recommends consideration of several qualitative factors that may be used in the determination of significance, such as the extent to which the given project complies with state, regional, or local GHG reduction plans and policies. OPR does not set or dictate specific thresholds of significance. Consistent with existing CEQA Guidelines, OPR encourages local governments to develop and publish their own thresholds of significance for GHG impacts assessment.
- When creating their own thresholds of significance, local governments may consider the thresholds of significance adopted or recommended by other public agencies, or recommended by experts.

- New amendments include guidelines for determining methods to mitigate the effects of greenhouse gas emissions in Appendix F of the CEQA Guidelines.
- OPR is clear to state that "to qualify as mitigation, specific measures from an existing plan must be identified and incorporated into the project; general compliance with a plan, by itself, is not mitigation".
- OPR's emphasizes the advantages of analyzing GHG impacts on an institutional, programmatic level. OPR therefore approves tiering of environmental analyses and highlights some benefits of such an approach.
- Environmental impact reports (EIRs) must specifically consider a project's energy use and energy efficiency potential.

Senate Bill 100

Senate Bill 100 (SB 100) requires 100 percent of total retail sales of electricity in California to come from eligible renewable energy resources and zero-carbon resources by December 31, 2045. SB 100 was adopted September 2018.

The interim thresholds from prior Senate Bills and Executive Orders would also remain in effect. These include Senate Bill 1078 (SB 1078), which requires retail sellers of electricity, including investor-owned utilities and community choice aggregators, to provide at least 20 percent of their supply from renewable sources by 2017. Senate Bill 107 (SB 107) which changed the target date to 2010. Executive Order S-14-08, which was signed on November 2008 and expanded the State's Renewable Energy Standard to 33 percent renewable energy by 2020. Executive Order S-21-09 directed the CARB to adopt regulations by July 31, 2010 to enforce S-14-08. Senate Bill X1-2 codifies the 33 percent renewable energy requirement by 2020.

Senate Bill 375

Senate Bill 375 (SB 375) was adopted September 2008 and aligns regional transportation planning efforts, regional GHG emission reduction targets, and land use and housing allocation. SB 375 requires Metropolitan Planning Organizations (MPO) to adopt a sustainable communities strategy (SCS) or alternate planning strategy (APS) that will prescribe land use allocation in that MPOs Regional Transportation Plan (RTP). The CARB, in consultation with each MPO, will provide each affected region with reduction targets for GHGs emitted by passenger cars and light trucks in the region for the years 2020 and 2035. These reduction targets will be updated every eight years but can be updated every four years if advancements in emissions technologies affect the reduction strategies to achieve the targets. The CARB is also charged with reviewing each MPO's sustainable communities strategy or alternate planning strategy for consistency with its assigned targets.

The proposed project is located within the Southern California Association of Governments (SCAG) jurisdiction, which has authority to develop the SCS or APS. For the SCAG region, the targets set by the CARB are at eight percent below 2005 per capita GHG emissions levels by 2020 and 19 percent below 2005 per capita GHG emissions levels by 2035. These reduction targets became effective October 2018.

Senate Bill X7-7

Senate Bill X7-7 (SB X7-7), enacted on November 9, 2009, mandates water conservation targets and efficiency improvements for urban and agricultural water suppliers. SB X7-7 requires the Department of Water Resources (DWR) to develop a task force and technical panel to develop alternative best management practices for the water sector. In addition, SB X7-7 required the DWR to develop criteria for baseline uses for residential, commercial, and industrial uses for both indoor and landscaped area uses. The DWR was also required to develop targets and regulations that achieve a statewide 20 percent reduction in water usage.

Assembly Bill 939 and Senate Bill 1374

Assembly Bill 939 (AB 939) requires that each jurisdiction in California to divert at least 50 percent of its waste away from landfills, whether through waste reduction, recycling or other means. Senate Bill 1374 (SB

1374) requires the California Integrated Waste Management Board to adopt a model ordinance by March 1, 2004, suitable for adoption by any local agency to require 50 to 75 percent diversion of construction and demolition of waste materials from landfills.

California Code of Regulations (CCR) Title 24, Part 6

CCR Title 24, Part 6: California's Energy Efficiency Standards for Residential and Nonresidential Buildings (Title 24) were first established in 1978 in response to a legislative mandate to reduce California's energy consumption. The standards are updated periodically to allow consideration and possible incorporation of new energy efficiency technologies and methods. Although it was not originally intended to reduce GHG emissions, electricity production by fossil fuels results in GHG emissions and energy efficient buildings require less electricity. Therefore, increased energy efficiency results in decreased GHG emissions.

The Energy Commission adopted 2008 Standards on April 23, 2008, and Building Standards Commission approved them for publication on September 11, 2008. These updates became effective on August 1, 2009. CalEEMod modeling defaults to 2008 standards. 2013 Standards were approved and have been effective since July 1, 2014. 2016 Standards were adopted January 1, 2017. 2019 standards were published July 1, 2019 and became effective January 1, 2020. All buildings for which an application for a building permit is submitted on or after January 1, 2020 must follow the 2019 standards. The 2016 residential standards were estimated to be approximately 28 percent more efficient than the 2013 standards, whereas the 2019 residential standards are estimated to be approximately 7 percent more efficient than the 2016 standards. Furthermore, once rooftop solar electricity generation is factored in, 2019 residential standards are estimated to be approximately 53 percent more efficient than the 2016 standards. Under the 2019 standards, nonresidential buildings are estimated to be approximately 30 percent more efficient than the 2016 standards. Energy efficient buildings require less electricity; therefore, increased energy efficiency reduces fossil fuel consumption and decreases greenhouse gas emissions.

Per Section 100 Scope, the 2019 Title 24, Part 6 Building Code now requires healthcare facilities, such as assisted living facilities, hospitals, and nursing homes, to meet documentation requirements of Title 24, Part 1 Chapter 7 – Safety Standards for Health Facilities. A healthcare facility is defined as any building or portion thereof licensed pursuant to California Health and Safety Code Division 2, Chapter 1, Section 1204 or Chapter 2, Section 1250.

Section 120.1 Ventilation and Indoor Air Quality included both additions and revisions in the 2019 Code. This section now requires nonresidential and hotel/motel buildings to have air filtration systems that use forced air ducts to supply air to occupiable spaces to have air filters. Further, the air filter efficiency must be either MERV 13 or use a particle size efficiency rating specific in the Energy Code AND be equipped with air filters with a minimum 2-inch depth or minimum 1-inch depth if sized according to the equation 120.1-A. If natural ventilation is to be used the space must also use mechanical unless ventilation openings are either permanently open or controlled to stay open during occupied times. The 2019 version of the Code also completely revised the minimum ventilation requirements including DVC airflow rates within Section 120.1 Table 120.1–A. Table 120.1-A now includes air classification and recirculation limitations, these are based on either the number of occupants or the CFM/ft^2 (cubic feet per minute per square foot), whichever is greater.

Section 120.1 Ventilation and Indoor Air Quality also included additions for high-rise residential buildings. Requirements include that mechanical systems must provide air filters that and that air filters must be MERV 13 or use a particle size efficiency rating specified in the Energy Code. Window operation is no longer a method allowed to meet ventilation requirements, continuous operation of central forced air system handlers used in central fan integrated ventilation system is not a permissible method of providing the dwelling unit ventilation airflow, and central ventilation systems that serve multiple dwelling units must be balanced to provide ventilation airflow to each dwelling unit. In addition, requirements for kitchen range hoods were also provided in the updated Section 120.1.

Per Section 120.1(a) healthcare facilities must be ventilated in accordance with Chapter 4 of the California Mechanical Code and are NOT required to meet the ventilations requirements of Title 24, Part 6.

Section 140.4 Space Conditioning Systems included both additions and revisions within the 2019 Code. The changes provided new requirements for cooling tower efficiency, new chilled water-cooling system requirements, as well as new formulas for calculating allowed fan power. Section 140.4(n) also provide a new exception for mechanical system shut-offs for high-rise multifamily dwelling units, while Section 140.4(o) added new requirements for conditioned supply air being delivered to space with mechanical exhaust.

Section 120.6 Covered Processes added information in regards to adiabatic chiller requirements that included that all condenser fans for air-cooled converseness, evaporative-cooled condensers, adiabatic condensers, gas coolers, air or water fluid coolers or cooling towers must be continuously variable speed, with the speed of all fans serving a common condenser high side controlled in unison .Further, the mid-condensing setpoint must be 70 degrees Fahrenheit for all of the above mentioned systems.

New regulations were also adopted under Section 130.1 Indoor Lighting Controls. These included new exceptions being added for restrooms, the exception for classrooms being removed, as well as exceptions in regard to sunlight provided through skylights and overhangs.

Section 130.2 Outdoor Lighting Controls and Equipment added automatic scheduling controls which included that outdoor lighting power must be reduced by 50 to 90 percent, turn the lighting off during unoccupied times and have at least two scheduling options for each luminaire independent from each other and with a 2-hour override function. Furthermore, motion sensing controls must have the ability to reduce power within 15 minutes of area being vacant and be able to come back on again when occupied. An exception allows for lighting subject to a health or life safety statute, ordinance, or regulation may have a minimum time-out period longer than 15 minutes or a minimum dimming level above 50% when necessary to comply with the applicable law.

The 2022 Building Energy Efficiency Standards became effective on January 1, 2023. [27] The core focus of the building standards has been efficiency, but the 2019 Energy Code ventured into onsite generation by requiring solar PV on new homes, providing significant GHG savings. The 2022 update builds off this progress with expanded solar standards and the move to onsite energy storage that will help Californians save on utility bills while bolstering the grid. The 2022 Energy Code update focuses on four key areas in new construction of homes and businesses:

- Encouraging electric heat pump technology and use, which consumes less energy and produces fewer emissions than traditional HVACs and water heaters.
- Establishing electric-ready requirements when natural gas is installed, which positions owners to use cleaner electric heating, cooking and electric vehicle (EV) charging options whenever they choose to adopt those technologies.
- Expanding solar photovoltaic (PV) system and battery storage standards to make clean energy available onsite and complement the state's progress toward a 100 percent clean electricity grid.
- Strengthening ventilation standards to improve indoor air quality.

The 2022 Energy Code affects homes by establishing energy budgets based on efficient heat pumps for space or water heating to encourage builders to install heat pumps over gas-fueled HVAC units; requiring homes to be electric-ready, with dedicated 240-volt outlets and space (with plumbing for water heaters) so electric appliances can eventually replace installed gas appliances; increasing minimum kitchen ventilation requirements so that fans over cooktops have higher airflow or capture efficiency to better exhaust pollution

[27] California Energy Commission (CEC). 2022. Building Energy Efficiency Standards. https://www.energy.ca.gov/programs-and-topics/programs/building-energy-efficiency-standards/2022-building-energy-efficiency.

from gas cooking and improve indoor air quality; and allowing exceptions to existing solar PV standards when roof area is not available (such as for smaller homes). In addition, the effect on businesses includes establishing combined solar PV and battery standards for select businesses with systems being sized to maximize onsite use of solar energy and avoid electricity demand during times when the grid must use gas-powered plants; establishing new efficiency standards for commercial greenhouses (primarily cannabis growing); and improving efficiency standards for building envelope, various internal.

California Code of Regulations (CCR) Title 24, Part 11 (California Green Building Standards)

On January 12, 2010, the State Building Standards Commission unanimously adopted updates to the California Green Building Standards Code, which went into effect on January 1, 2011.

2016 CALGreen Code: The 2016 residential standards were estimated to be approximately 28 percent more efficient than the 2013 standards. Energy efficient buildings require less electricity; therefore, increased energy efficiency reduces fossil fuel consumption and decreases greenhouse gas emissions. During the 2016-2017 fiscal year, the Department of Housing and Community Development (HCD) updated CALGreen through the 2015 Triennial Code Adoption Cycle.

HCD also increased the required construction waste reduction from 50 percent to 65 percent of the total building site waste. This increase aids in meeting CalRecycle's statewide solid waste recycling goal of 75 percent for 2020 as stated in Chapter 476, Statutes of 2011 (AB 341). HCD adopted new regulations requiring recycling areas for multifamily projects of five or more dwelling units. This regulation requires developers to provide readily accessible areas adequate in size to accommodate containers for depositing, storage and collection of non-hazardous materials (including organic waste) for recycling. This requirement assists businesses that were required as of April 1, 2016, to meet the requirements of Chapter 727, Statutes of 2014 (AB 1826).

HCD adopted new regulations to require information on photovoltaic systems and electric vehicle chargers to be included in operation and maintenance manuals. Currently, CALGreen section 4.410.1 Item 2(a) requires operation and maintenance instructions for equipment and appliances. Photovoltaic systems and electric vehicle chargers are systems that play an important role in many households in California, and their importance is increasing every day. HCD incorporated these two terms in the existing language in order to provide clarity to code users as to additional systems requiring operation and maintenance instructions.

HCD updated the reference to Clean Air Standards of the United States Environmental Protection Agency applicable to woodstoves and pellet stoves. HCD also adopted a new requirement for woodstoves and pellet stoves to have a permanent label indicating they are certified to meet the emission limits. This requirement provides clarity to the code user and is consistent with the United States Environmental Protection Agency's New Source Performance Standards. HCD updated the list of standards which can be used for verification of compliance for exterior grade composite wood products. This list now includes four standards from the Canadian Standards Association (CSA): CSA O121, CSA O151, CSA O153 and CSA O325. HCD updated heating and air-conditioning system design references to the ANSI/ACCA 2 Manual J, ANSI/ACCA 1 Manual D, and ANSI/ACCA 3 Manual S to the most recent versions approved by ANSI. HCD adopted a new elective measure for hot water recirculation systems for water conservation. The United States Department of Energy estimates that 3,600 to 12,000 gallons of water per year can be saved by the typical household (with four points of hot water use) if a hot water recirculation system is installed.

2019 CALGreen Code: During the 2019-2020 fiscal year, the Department of Housing and Community Development (HCD) updated CALGreen through the 2019 Triennial Code Adoption Cycle. The 2019 version of the California Green Building Standards became effective January 1, 2020.

HCD modified the best management practices for stormwater pollution prevention adding Section 5.106.2 for projects that disturb one or more acres of land. This section requires projects that disturb one acre or more of land or less than one acre of land but are part of a larger common plan of development or sale must

comply with the postconstruction requirement detailed in the applicable National Pollutant Discharge Elimination System (NPDES) General Permit for Stormwater Discharges Associated with Construction and Land Disturbance Activities issued by the State Water Resources Control Board. The NPDES permits require postconstruction runoff (post-project hydrology) to match the preconstruction runoff pre-project hydrology) with installation of postconstruction stormwater management measures.

HCD added sections 5.106.4.1.3 and 5.106.4.1.5 in regard to bicycle parking. Section 5.106.4.1.3 requires new buildings with tenant spaces that have 10 or more tenant-occupants, provide secure bicycle parking for 5 percent of the tenant-occupant vehicular parking spaces with a minimum of one bicycle parking facility. In addition, Section 5.106.4.1.5 states that acceptable bicycle parking facility for Sections 5.106.4.1.2 through 5.106.4.1.4 shall be convenient from the street and shall meeting one of the following: (1) covered, lockable enclosures with permanently anchored racks for bicycles; (2) lockable bicycle rooms with permanently anchored racks; or (3) lockable, permanently anchored bicycle lockers.

HCD amended section 5.106.5.3.5 allowing future charging spaces to qualify as designated parking for clean air vehicles.

HCD updated section 5.303.3.3 in regard to showerhead flow rates. This update reduced the flow rate to 1.8 GPM.

HCD amended section 5.304.1 for outdoor potable water use in landscape areas and repealed sections 5.304.2 and 5.304.3. The update requires nonresidential developments to comply with a local water efficient landscape ordinance or the current California Department of Water Resource's' Model Water Efficient Landscape Ordinance (MWELO), whichever is more stringent. Some updates were also made in regard to the outdoor potable water use in landscape areas for public schools and community colleges.

HCD updated Section 5.504.5.3 in regard to the use of MERV filters in mechanically ventilated buildings. This update changed the filter use from MERV 8 to MERV 13. MERV 13 filters are to be installed prior to occupancy, and recommendations for maintenance with filters of the same value shall be included in the operation and maintenance manual.

The 2022 California Green Building Standards Code became effective on January 1, 2023.[28]

HCD amended Section 5.106.5.3 in regard to increasing the EV capable space percentages and adding a new requirement for installed Level 2 DCFC chargers.

HCD under Section 5.106.5.4 added new regulation for electric vehicle charging readiness requirements for new construction of warehouse, grocery stores, and retail stores with planned off-street loading spaces. [29]

Executive Order B-30-15

On April 29, 2015, Governor Brown issued Executive Order B-30-15. Therein, the Governor directed the following:

- Established a new interim statewide reduction target to reduce GHG emissions to 40 percent below 1990 levels by 2030.
- Ordered all state agencies with jurisdiction over sources of GHG emissions to implement measures to achieve reductions of GHG emissions to meet the 2030 and 2050 reduction targets.

[28] California Building Standards Commission (CBSC). 2022. California Green Building Standards. Website: https://codes.iccsafe.org/content/CAGBC2022P1.

[29] https://www.dgs.ca.gov/BSC/Resources/2022-Title-24-California-Code-Changes

- Directed CARB to update the Climate Change Scoping Plan to express the 2030 target in terms of million metric tons of carbon dioxide equivalent.

Executive Order B-29-15

Executive Order B-29-15, mandates a statewide 25 percent reduction in potable water usage. EO B-29-15 signed into law on April 1, 2015.

Executive Order B-37-16

Executive Order B-37-16, continuing the State's adopted water reductions, was signed into law on May 9, 2016. The water reductions build off the mandatory 25 percent reduction called for in EO B-29-15.

Executive Order N-79-20

Executive Order N-79-20 was signed into law on September 23, 2020 and mandates 100 percent of in-state sales of new passenger cars and trucks be zero-emission by 2035; 100 percent of medium- and heavy-duty vehicles in the state be zero-emission vehicles by 2045 for all operations where feasible and by 2035 for drayage trucks; and to transition to 100 percent zero-emission off-road vehicles and equipment by 2035 where feasible.

SBX1 2

Signed into law in April 2011, SBX1 2, requires one-third of the State's electricity to come from renewable sources. The legislation increases California's current 20 percent renewables portfolio standard target in 2010 to a 33 percent renewables portfolio standard by December 31, 2020.

Senate Bill 350

Signed into law October 7, 2015, SB 350 increases California's renewable electricity procurement goal from 33 percent by 2020 to 50 percent by 2030. This will increase the use of Renewables Portfolio Standard (RPS) eligible resources, including solar, wind, biomass, geothermal, and others. In addition, SB 350 requires the state to double statewide energy efficiency savings in electricity and natural gas end uses by 2030. To help ensure these goals are met and the greenhouse gas emission reductions are realized, large utilities will be required to develop and submit Integrated Resource Plans (IRPs). These IRPs will detail how each entity will meet their customers resource needs, reduce greenhouse gas emissions and ramp up the deployment of clean energy resources.

Energy Sector and CEQA Guidelines Appendix F

The CEC first adopted Energy Efficiency Standards for Residential and Nonresidential Buildings (CCR, Title 24, Part 6) in 1978 in response to a legislative mandate to reduce energy consumption in the state. Although not originally intended to reduce GHG emissions, increased energy efficiency and reduced consumption of electricity, natural gas, and other fuels would result in fewer GHG emissions from residential and nonresidential buildings subject to the standard. The standards are updated periodically (typically every three years) to allow for the consideration and inclusion of new energy efficiency technologies and methods. The 2016 update to the Energy Efficiency Standards for Residential and Nonresidential Buildings focuses on several key areas to improve the energy efficiency of renovations and addition to existing buildings as well as newly constructed buildings and renovations and additions to existing buildings. The major efficiency improvements to the residential Standards involve improvements for attics, walls, water heating, and lighting, whereas the major efficiency improvements to the nonresidential Standards include alignment with the American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE) 90.1-2013 national

standards. Furthermore, the 2016 update required that enforcement agencies determine compliance with CCR, Title 24, Part 6 before issuing building permits for any construction.[30]

Part 11 of the Title 24 Building Energy Efficiency Standards is referred to as the California Green Building Standards (CALGreen) Code. The purpose of the CALGreen Code is to "improve public health, safety and general welfare by enhancing the design and construction of buildings through the use of building concepts having a reduced negative impact or positive environmental impact and encouraging sustainable construction practices in the following categories: (1) Planning and design; (2) Energy efficiency; (3) Water efficiency and conservation; (4) Material conservation and resource efficiency; and (5) Environmental air quality."[31] As of January 1, 2011, the CALGreen Code is mandatory for all new buildings constructed in the state. The CALGreen Code establishes mandatory measures for new residential and non-residential buildings. Such mandatory measures include energy efficiency, water conservation, material conservation, planning and design, and overall environmental quality. The CALGreen Code was most recently updated in 2022 to include new mandatory measures for residential and nonresidential uses; the new measures took effect on January 1, 2023.

Regional – South Coast Air Quality Management District

The project is within the South Coast Air Basin, which is under the jurisdiction of the South Coast Air Quality Management District (SCAQMD).

SCAQMD Regulation XXVII, Climate Change

SCAQMD Regulation XXVII currently includes three rules:

- The purpose of Rule 2700 is to define terms and post global warming potentials.
- The purpose of Rule 2701, SoCal Climate Solutions Exchange, is to establish a voluntary program to encourage, quantify, and certify voluntary, high quality certified greenhouse gas emission reductions in the SCAQMD.
- Rule 2702, Greenhouse Gas Reduction Program, was adopted on February 6, 2009. The purpose of this rule is to create a Greenhouse Gas Reduction Program for greenhouse gas emission reductions in the SCAQMD. The SCAQMD will fund projects through contracts in response to requests for proposals or purchase reductions from other parties.

A variety of agencies have developed greenhouse gas emission thresholds and/or have made recommendations for how to identify a threshold. However, the thresholds for projects in the jurisdiction of the SCAQMD remain in flux. The California Air Pollution Control Officers Association explored a variety of threshold approaches but did not recommend one approach (2008). The ARB recommended approaches for setting interim significance thresholds (California Air Resources Board 2008b), in which a draft industrial project threshold suggests that non-transportation related emissions under 7,000 MTCO2e per year would be less than significant; however, the ARB has not approved those thresholds and has not published anything since then. The SCAQMD is in the process of developing thresholds, as discussed below.

SCAQMD Threshold Development

On December 5, 2008, the SCAQMD Governing Board adopted an interim greenhouse gas significance threshold for stationary sources, rules, and plans where the SCAQMD is lead agency (SCAQMD permit threshold). The SCAQMD permit threshold consists of five tiers. However, the SCAQMD is not the lead agency for this project. Therefore, the five permit threshold tiers do not apply to the proposed project.

[30] California Energy Commission, 2016 Building Energy Efficiency Standards, June 2015, http://www.energy.ca.gov/2015publications/CEC-400-2015-037/CEC-400-2015-037-CMF.pdf

[31] California Building Standards Commission, 2010 California Green Building Standards Code, (2010).

The SCAQMD is in the process of preparing recommended significance thresholds for greenhouse gases for local lead agency consideration ("SCAQMD draft local agency threshold"); however, the SCAQMD Board has not approved the thresholds as of the date of the Notice of Preparation. The current draft thresholds consist of the following tiered approach:

- Tier 1 consists of evaluating whether or not the project qualifies for any applicable exemption under CEQA.
- Tier 2 consists of determining whether the project is consistent with a greenhouse gas reduction plan. If a project is consistent with a qualifying local greenhouse gas reduction plan, it does not have significant greenhouse gas emissions.
- Tier 3 consists of screening values, which the lead agency can choose, but must be consistent with all projects within its jurisdiction. A project's construction emissions are averaged over 30 years and are added to a project's operational emissions. If a project's emissions are under one of the following screening thresholds, then the project is less than significant:
  - All land use types: 3,000 $MTCO_2e$ per year
  - Based on land use type: residential: 3,500 $MTCO_2e$ per year; commercial: 1,400 $MTCO_2e$ per year; or mixed use: 3,000 $MTCO_2e$ per year.
  - Based on land type: Industrial (where SCAQMD is the lead agency), 10,000 $MTCO_2e$ per year.
- Tier 4 has the following options:
  - Option 1: Reduce emissions from business as usual (BAU) by a certain percentage; this percentage is currently undefined.
  - Option 2: Early implementation of applicable AB 32 Scoping Plan measures.
  - Option 3, 2020 target for service populations (SP), which includes residents and employees: 4.8 $MTCO_2e$/SP/year for projects and 6.6 $MTCO_2e$/SP/year for plans;
  - Option 3, 2035 target: 3.0 $MTCO_2e$/SP/year for projects and 4.1 $MTCO_2e$/SP/year for plans.
- Tier 5 involves mitigation offsets to achieve target significance threshold.

The SCAQMD's draft threshold uses the Executive Order S-3-05 goal as the basis for the Tier 3 screening level. Achieving the Executive Order's objective would contribute to worldwide efforts to cap carbon dioxide concentrations at 450 ppm, thus stabilizing global climate. Specifically, the Tier 3 screening level for stationary sources is based on an emission capture rate of 90 percent for all new or modified projects. A 90 percent emission capture rate means that 90 percent of total emissions from all new or modified stationary source projects would be subject to a CEQA analysis, including a negative declaration, a mitigated negative declaration, or an environmental impact report, which includes analyzing feasible alternatives and imposing feasible mitigation measures. A GHG significance threshold based on a 90 percent emission capture rate may be more appropriate to address the long-term adverse impacts associated with global climate change because most projects will be required to implement GHG reduction measures. Further, a 90 percent emission capture rate sets the emission threshold low enough to capture a substantial fraction of future stationary source projects that will be constructed to accommodate future statewide population and economic growth, while setting the emission threshold high enough to exclude small projects that will in aggregate contribute a relatively small fraction of the cumulative statewide GHG emissions. This assertion is based on the fact that staff estimates that these GHG emissions would account for slightly less than one percent of future 2050 statewide GHG emissions target (85 $MMTCO_2eq$/year). In addition, these small projects may be subject to future applicable GHG control regulations that would further reduce their overall future contribution to the statewide GHG inventory. Finally, these small sources are already subject to BACT for criteria pollutants and are more likely to be single-permit facilities, so they are more likely to have few opportunities readily available to reduce GHG emissions from other parts of their facility.

SCAQMD Working Group

Since neither the CARB nor the OPR has developed GHG emissions threshold, the SCAQMD formed a Working Group to develop significance thresholds related to GHG emissions. At the September 28, 2010

Working Group meeting, the SCAQMD released its most current version of the draft GHG emissions thresholds, which recommends a tiered approach that provides a quantitative annual threshold of 10,000 MTCO2e for industrial uses.

In order to assist local agencies with direction on GHG emissions, the SCAQMD organized a working group and adopted Rules 2700, 2701, 2702, and 3002 which are described below.

SCAQMD Rules 2700 and 2701

The SCAQMD adopted Rules 2700 and 2701 on December 5, 2008, which establishes the administrative structure for a voluntary program designed to quantify GHG emission reductions. Rule 2700 establishes definitions for the various terms used in Regulation XXVII – Global Climate Change. Rule 2701 provides specific protocols for private parties to follow to generate certified GHG emission reductions for projects within the district. Approved protocols include forest projects, urban tree planting, and manure management. The SCAQMD is currently developing additional protocols for other reduction measures. For a GHG emission reduction project to qualify, it must be verified and certified by the SCAQMD Executive Officer, who has 60 days to approve or deny the Plan to reduce GHG emissions. Upon approval of the Plan, the Executive Officer issues required to issue a certified receipt of the GHG emission reductions within 90 days.

SCAQMD Rule 2702

The SCAQMD adopted Rule 2702 on February 6, 2009, which establishes a voluntary air quality investment program from which SCAQMD can collect funds from parties that desire certified GHG emission reductions, pool those funds, and use them to purchase or fund GHG emission reduction projects within two years, unless extended by the Governing Board. Priority will be given to projects that result in co-benefit emission reductions of GHG emissions and criteria or toxic air pollutants within environmental justice areas. Further, this voluntary program may compete with the cap-and-trade program identified for implementation in CARB's Scoping Plan, or a federal cap and trade program.

SCAQMD Rule 3002

The SCAQMD amended Rule 3002 on November 5, 2010 to include facilities that emit greater than 100,000 tons per year of CO_2e are required to apply for a Title V permit by July 1, 2011. A Title V permit is for facilities that are considered major sources of emissions.

Local – City of Perris

The City of Perris Climate Action Plan (CAP) was completed in February 2016. The CAP was developed to address global climate change through the reduction of harmful greenhouse gas emissions at the community level and as part of California's mandated statewide GHG reduction goal (AB 32). Through the CAP, the city has developed multiple sustainable strategies to directly benefit the community by decreasing carbon emissions while adapting to a changing climate. The programs and actions provided in the CAP were developed to help the city grow healthily, resourcefully, and sustainably.

SIGNIFICANCE THRESHOLDS

Appendix G of State CEQA Guidelines

The CEQA Guidelines recommend that a lead agency consider the following when assessing the significance of impacts from GHG emissions on the environment:

- The extent to which the project may increase (or reduce) GHG emissions as compared to the existing environmental setting;

- Whether the project emissions exceed a threshold of significance that the lead agency determines applies to the project;
- The extent to which the project complies with regulations or requirements adopted to implement an adopted statewide, regional, or local plan for the reduction or mitigation of GHG emissions[32].

Thresholds of Significance for this Project

To determine whether the project's GHG emissions are significant, this analysis uses the SCAQMD screening threshold of 10,000 MTCO2e per year for industrial uses.

METHODOLOGY

The proposed project is anticipated to generate GHG emissions from area sources, energy usage, mobile sources, waste, water, and construction equipment. The following provides the methodology used to calculate the project-related GHG emissions and the project impacts.

CalEEMod Version 2022.1.1.14 was used to calculate the GHG emissions from the proposed project. The CalEEMod Output for year 2025 is available in Appendix C. Each source of GHG emissions is described in greater detail below.

Area Sources

Area sources include emissions from consumer products, landscape equipment and architectural coatings. No changes were made to the default area source emissions.

Energy Usage

Energy usage includes emissions from the generation of electricity and natural gas used on-site. No changes were made to the default energy usage parameters.

Mobile Sources

Mobile sources include emissions from the additional vehicle miles generated from the proposed project. The vehicle trips associated with the proposed project have been analyzed by inputting the project-generated vehicular trips from the Trip Generation Comparison into the CalEEMod Model. The program then applies the emission factors for each trip which is provided by the EMFAC2021 model to determine the vehicular traffic pollutant emissions. See Section 2 for details.

Waste

Waste includes the GHG emissions generated from the processing of waste from the proposed project as well as the GHG emissions from the waste once it is interred into a landfill. No changes were made to the default waste parameters.

Water

Water includes the water used for the interior of the building as well as for landscaping and is based on the GHG emissions associated with the energy used to transport and filter the water. No changes were made to the default water usage parameters.

[32] The Governor's Office of Planning and Research recommendations include a requirement that such a plan must be adopted through a public review process and include specific requirements that reduce or mitigate the project's incremental contribution of GHG emissions. If there is substantial evidence that the possible effects of a particular project are still cumulatively considerable, notwithstanding compliance with the adopted regulations or requirements, an EIR must be prepared for the project.

Offroad Sources

Offroad sources include emissions from the use of two CNG forklifts, 6 hours a day, 5 days a week inside the warehouse.

Stationary Sources

Stationary sources include emissions from the occasional use/testing of a 400 HP emergency back-up generator 12 hours a year and 200 HP emergency fire pump 12 hours a year.

Construction

The construction-related GHG emissions were also included in the analysis and were based on a 30-year amortization rate as recommended in the SCAQMD GHG Working Group meeting on November 19, 2009. The construction-related GHG emissions were calculated by CalEEMod and in the manner detailed above in Section 2.

PROJECT GREENHOUSE GAS EMISSIONS

The GHG emissions have been calculated based on the parameters described above. A summary of the results is shown below in Table 21 and the CalEEMod Model run for the proposed project is provided in Appendix B. Table 21 shows that the total for the proposed project's emissions (without credit for any reductions from sustainable design and/or regulatory requirements) would be 3,276.67 $MTCO_2e$ per year. According to the thresholds of significance established above, a cumulative global climate change impact would occur if the GHG emissions created from the on-going operations of the proposed project would exceed the SCAQMD threshold of 10,000 $MTCO_2e$ per year for industrial uses. Therefore, operation of the proposed project would not create a significant cumulative impact to global climate change. No mitigation is required.

Table 21
Project-Related Greenhouse Gas Emissions

Category	Greenhouse Gas Emissions (Metric Tons/Year)					
	Bio-CO2	NonBio-CO_2	CO_2	CH_4	N_2O	CO_2e
Maximum Annual Operations	47.30	3,022.00	3,069.00	4.90	0.22	3,260.00
Construction[1]	0.00	16.43	16.43	0.00	0.00	16.67
Total Emissions	47.30	3,038.43	3,085.43	4.90	0.22	3,276.67
SCAQMD Draft Screening Threshold for Industrial Land Uses						10,000
Exceeds Threshold?						No

Notes:

Source: CalEEMod Version 2022.1.1.14 for Opening Year 2025.

(1) Construction GHG emissions CO2e based on a 30 year amortization rate.

CONSISTENCY WITH APPLICABLE GREENHOUSE GAS REDUCTION PLANS AND POLICIES

The proposed project would have the potential to conflict with any applicable plan, policy or regulation of an agency adopted for the purpose of reducing the emissions of greenhouse gases. As stated previously, the City of Perris has a Climate Action Plan; therefore, the project and its GHG emissions have been compared to the goals of the City of Perris CAP.

SB-32

As stated previously, the SCAQMD's tier 3 thresholds used Executive Order S-3-05 goal as the basis for deriving the screening level. The California Governor issued Executive Order S-3-05, GHG Emission, in June 2005, which established the following reduction targets:

- 2010: Reduce greenhouse gas emissions to 2000 levels
- 2020: Reduce greenhouse gas emissions to 1990 levels
- 2050: Reduce greenhouse gas emissions to 80 percent below 1990 levels.

In 2006, the California State Legislature adopted AB 32, the California Global Warming Solutions Act of 2006. AB 32 requires CARB, to adopt rules and regulations that would achieve GHG emissions equivalent to statewide levels in 1990 by 2020 through an enforceable statewide emission cap which was phased in starting in 2012. Therefore, as the project's emissions meet the SCAQMD threshold of 10,000 MTCO2e per year for all land use types (in compliance with Executive Order S-3-05), the project's emissions also comply with the goals of AB 32. Additionally, as the project meets the current interim emissions targets/thresholds established by the SCAQMD, the project would also be on track to meet the reduction target of 40 percent below 1990 levels by 2030 mandated by SB-32. Furthermore, the majority of the post 2020 reductions in GHG emissions are addressed via regulatory requirements at the State level and the project will be required to comply with these regulations as they come into effect.

At a level of 3,276.67 $MTCO_2e$ per year, the project's GHG emissions do not exceed the SCAQMD threshold of 10,000 MTCO2e per year for industrial uses and would be in compliance with the reduction goals of the City of Perris' CAP, AB-32 and SB-32. Furthermore, the project will comply with applicable Green Building Standards and City of Perris' policies regarding sustainability (as dictated by the City's General Plan and CAP). Impacts are considered to be less than significant.

CUMULATIVE GREENHOUSE GAS IMPACTS

Although the project is expected to emit GHGs, the emission of GHGs by a single project into the atmosphere is not itself necessarily an adverse environmental effect. Rather, it is the increased accumulation of GHG from more than one project and many sources in the atmosphere that may result in global climate change. Therefore, in the case of global climate change, the proximity of the project to other GHG emission generating activities is not directly relevant to the determination of a cumulative impact because climate change is a global condition. According to CAPCOA, "GHG impacts are exclusively cumulative impacts; there are no non-cumulative GHG emission impacts from a climate change perspective."[33] The resultant consequences of that climate change can cause adverse environmental effects. A project's GHG emissions typically would be very small in comparison to state or global GHG emissions and, consequently, they would, in isolation, have no significant direct impact on climate change.

The state has mandated a goal of reducing statewide emissions to 1990 levels by 2020, even though statewide population and commerce are predicted to continue to expand. In order to achieve this goal, CARB is in the process of establishing and implementing regulations to reduce statewide GHG emissions. Consistent with

[33] Source: California Air Pollution Control Officers Association, CEQA & Climate change: Evaluating and Addressing Greenhouse Gas Emissions from Projects Subject to the California Environmental Quality Act, (2008).

CEQA Guidelines Section 15064h(3),[34] the City, as lead agency, has determined that the project's contribution to cumulative GHG emissions and global climate change would be less than significant if the project is consistent with the applicable regulatory plans and policies to reduce GHG emissions.

As discussed in the Consistency With Applicable Greenhouse Gas Reduction Plans and Policies section above, the project is consistent with the goals and objectives of the City of Perris CAP.

Thus, given the project's consistency with the City's CAP and SCAQMD's 10,000 MTCO2e per year threshold for industrial uses, the project would not conflict with any applicable plan, policy, or regulation of an agency adopted for the purpose of reducing the emissions of GHGs. Given this consistency, it is concluded that the project's incremental contribution to greenhouse gas emissions and their effects on climate change would not be cumulatively considerable.

[34] The State CEQA Guidelines were amended in response to SB 97. In particular, the State CEQA Guidelines were amended to specify that compliance with a GHG emissions reduction program renders a cumulative impact insignificant. Per State CEQA Guidelines Section 15064(h)(3), a project's incremental contribution to a cumulative impact can be found not cumulatively considerable if the project will comply with an approved plan or mitigation program that provides specific requirements that will avoid or substantially lessen the cumulative problem within the geographic area of the project. To qualify, such a plan or program must be specified in law or adopted by the public agency with jurisdiction over the affected resources through a public review process to implement, interpret, or make specific the law enforced or administered by the public agency. Examples of such programs include a "water quality control plan, air quality attainment or maintenance plan, integrated waste management plan, habitat conservation plan, natural community conservation plan, [and] plans or regulations for the reduction of greenhouse gas emissions."

5. ENERGY ANALYSIS

EXISTING CONDITIONS

This section provides an overview of the existing energy conditions in the project area and region.

Overview

California's estimated annual energy use as of 2021 included:

- Approximately 277,764 gigawatt hours of electricity;[35]
- Approximately 2,092,612 million cubic feet of natural gas per year;[36] and
- Approximately 23.2 billion gallons of transportation fuel (for the year 2015).[37]

As of 2020, the year of most recent data currently available by the United States Energy Information Administration (EIA), energy use in California by demand sector was:

- Approximately 34 percent transportation;
- Approximately 24.6 percent industrial;
- Approximately 21.8 percent residential; and
- Approximately 19.6 percent commercial.[38]

California's electricity in-state generation system generates approximately 194,127 gigawatt-hours each year. In 2021, California produced approximately 70 percent of the electricity it uses; the rest was imported from the Pacific Northwest (approximately 12 percent) and the U.S. Southwest (approximately 18 percent). Natural gas is the main source for electricity generation at approximately 50.2 percent of the total in-state electric generation system power as shown in Table 22.

A summary of and context for energy consumption and energy demands within the State is presented in "U.S. Energy Information Administration, California State Profile and Energy Estimates, Quick Facts" excerpted below:

- California was the seventh-largest producer of crude oil among the 50 states in 2021, and, as of January 2021, it ranked third in oil refining capacity.
- California is the largest consumer of jet fuel and second-largest consumer of motor gasoline among the 50 states and accounted for fifteen percent of the nation's jet fuel consumption and ten percent of motor gasoline consumption in 2020.
- In 2019, California was the second-largest total energy consumer among the states, but its per capita energy consumption was less than in all other states except Rhode Island, due in part to its mild climate and its energy efficiency programs.
- In 2021, California was the nation's top producer of electricity from solar, geothermal, and biomass energy. The state was fourth in the nation in conventional hydroelectric power generation, down from second in 2019, in part because of drought and increased water demand.

[35] California Energy Commission. Energy Almanac. Total Electric Generation. [Online] 2021. https://www.energy.ca.gov/data-reports/energy-almanac/california-electricity-data/2020-total-system-electric-generation.

[36] Natural Gas Consumption by End Use. U.S. Energy Information Administration. [Online] 2021. https://www.eia.gov/dnav/ng/ng_cons_sum_dcu_SCA_a.htm.

[37] California Energy Commission. Revised Transportation Energy Demand Forecast 2018-2030. [Online] 2021. https://www.energy.ca.gov/data-reports/planning-and-forecasting

[38] U.S. Energy Information Administration. California Energy Consumption by End-Use Sector, 2020. California State Profile Overview.[Online] December 20, 2022 https://www.eia.gov/state/?sid=CA#tabs-2

- In 2021, California was the fourth-largest electricity producer in the nation, but the state was also the nation's second-largest consumer of electricity, and in 2020, it received about 30% of its electricity supply from generating facilities outside of California, including imports from Mexico.[43]

As indicated above, California is one of the nation's leading energy-producing states, and California per capita energy use is among the nation's most efficient. Given the nature of the proposed project, the remainder of this discussion will focus on the three sources of energy that are most relevant to the project—namely, electricity and natural gas, and transportation fuel for vehicle trips associated with the proposed project.

Electricity

Electricity would be provided to the project by Southern California Edison (SCE). SCE provides electric power to more than 15 million persons, within a service area encompassing approximately 50,000 square miles.[45] SCE derives electricity from varied energy resources including: fossil fuels, hydroelectric generators, nuclear power plants, geothermal power plants, solar power generation, and wind farms. SCE also purchases from independent power producers and utilities, including out-of-state suppliers.[46]

Table 23 identifies SCE's specific proportional shares of electricity sources in 2021. As shown in Table 23, the 2021 SCE Power Mix has renewable energy at 31.4 percent of the overall energy resources, of which biomass and waste is at 0.1 percent, geothermal is at 5.7 percent, eligible hydroelectric is at 0.5 percent, solar energy is at 14.9 percent, and wind power is at 10.2 percent; other energy sources include large hydroelectric at 2.3 percent, natural gas at 22.3 percent, nuclear at 9.2 percent, other at 0.2 percent, and unspecified sources at 34.6 percent.

Natural Gas

Natural gas would be provided to the project by Southern California Gas (SoCalGas). The following summary of natural gas resources and service providers, delivery systems, and associated regulation is excerpted from information provided by the California Public Utilities Commission (CPUC).

The CPUC regulates natural gas utility service for approximately 11 million customers that receive natural gas from Pacific Gas and Electric (PG&E), Southern California Gas (SoCalGas), San Diego Gas & Electric (SDG&E), Southwest Gas, and several smaller investor-owned natural gas utilities. The CPUC also regulates independent storage operators Lodi Gas Storage, Wild Goose Storage, Central Valley Storage and Gill Ranch Storage.

The vast majority of California's natural gas customers are residential and small commercial customers, referred to as "core" customers. Larger volume gas customers, like electric generators and industrial customers, are called "noncore" customers. Although very small in number relative to core customers, noncore customers consume about 65% of the natural gas delivered by the state's natural gas utilities, while core customers consume about 35%.

The PUC regulates the California utilities' natural gas rates and natural gas services, including in-state transportation over the utilities' transmission and distribution pipeline systems, storage, procurement, metering and billing.

Most of the natural gas used in California comes from out-of-state natural gas basins. In 2017, for example, California utility customers received 38% of their natural gas supply from basins located in the U.S. Southwest, 27% from Canada, 27% from the U.S. Rocky Mountain area, and 8% from production located in California."[47]

[43] State Profile Overview. [Online] [Cited: March 17, 2022.] https://www.eia.gov/state/?sid=CA#tabs-2

[45] https://www.sce.com/about-us/who-we-are/leadership/our-service-territory

[46] California Energy Commission. Utility Energy Supply plans from 2015. https://www.energy.ca.gov/almanac/electricity_data/supply_forms.html

[47] California Public Utilities Commission. Natural Gas and California. http://www.cpuc.ca.gov/natural_gas/

Transportation Energy Resources

The project would attract additional vehicle trips with resulting consumption of energy resources, predominantly gasoline and diesel fuel. Gasoline (and other vehicle fuels) are commercially provided commodities and would be available to the project patrons and employees via commercial outlets.

The most recent data available shows the transportation sector emits 38 percent of the total greenhouse gases in the state and about 84 percent of smog-forming oxides of nitrogen (NOx).[48,49] About 28 percent of total United States energy consumption in 2021 was for transporting people and goods from one place to another. In 2021, petroleum comprised about 77 percent of all transportation energy use, excluding fuel consumed for aviation and most marine vessels.[50] In 2021, about 134.83 billion gallons (or about 3.21 billion barrels) of finished motor gasoline were consumed in the United States, an average of about 369 million gallons (or about 8.8 million barrels) per day.[51]

REGULATORY BACKGROUND

Federal and state agencies regulate energy use and consumption through various means and programs. On the federal level, the United States Department of Transportation, the United States Department of Energy, and the United States Environmental Protection Agency are three federal agencies with substantial influence over energy policies and programs. On the state level, the PUC and the California Energy Commissions (CEC) are two agencies with authority over different aspects of energy. Relevant federal and state energy-related laws and plans are summarized below.

Federal Regulations

Corporate Average Fuel Economy (CAFE) Standards

First established by the U.S. Congress in 1975, the Corporate Average Fuel Economy (CAFE) standards reduce energy consumption by increasing the fuel economy of cars and light trucks. The National Highway Traffic Safety Administration (NHTSA) and U.S. Environmental Protection Agency (USEPA) jointly administer the CAFE standards. The U.S. Congress has specified that CAFE standards must be set at the "maximum feasible level" with consideration given for: (1) technological feasibility; (2) economic practicality; (3) effect of other standards on fuel economy; and (4) need for the nation to conserve energy.[56]

Issued by NHTSA and EPA in March 2020 (published on April 30, 2020 and effective after June 29, 2020), the Safer Affordable Fuel-Efficient Vehicles Rule would maintain the CAFE and CO2 standards applicable in model year 2020 for model years 2021 through 2026. The estimated CAFE and CO2 standards for model year 2020 are 43.7 mpg and 204 grams of CO2 per mile for passenger cars and 31.3 mpg and 284 grams of CO2 per mile for light trucks, projecting an overall industry average of 37 mpg, as compared to 46.7 mpg under the standards issued in 2012.[57]

---

[48] CARB. California Greenhouse Gas Emissions Inventory – 2022 Edition. https://www.arb.ca.gov/cc/inventory/data/data.htm

[49] CARB. 2016 SIP Emission Projection Data. https://www.arb.ca.gov/app/emsinv/2017/emseic1_query.php?F_DIV=-4&F_YR=2012&F_SEASON=A&SP=SIP105ADJ&F_AREA=CA

[50] US Energy Information Administration. Use of Energy in the United States Explained: Energy Use for Transportation. https://www.eia.gov/energyexplained/?page=us_energy_transportation

[51] https://www.eia.gov/tools/faqs/faq.php?id=23&t=10

[56] https://www.nhtsa.gov/lawsregulations/corporate-average-fuel-economy.

[57] National Highway Traffic Safety Administration (NHTSA) and U.S. Environmental Protection Agency (USEPA), 2018. Federal Register / Vol. 83, No. 165 / Friday, August 24, 2018 / Proposed Rules, The Safer Affordable Fuel-Efficient (SAFE) Vehicles Rule for Model Years 2021–2026 Passenger Cars and Light Trucks 2018. Available at: https://www.epa.gov/regulations-emissions-vehicles-and-engines/safer-affordable-fuel-efficient-safe-vehicles-final-rule.

Intermodal Surface transportation Efficiency Act of 1991 (ISTEA)

The Intermodal Surface Transportation Efficiency Act of 1991 (ISTEA) promoted the development of inter-modal transportation systems to maximize mobility as well as address national and local interests in air quality and energy. ISTEA contained factors that Metropolitan Planning Organizations (MPOs) were to address in developing transportation plans and programs, including some energy-related factors. To meet the new ISTEA requirements, MPOs adopted explicit policies defining the social, economic, energy, and environmental values guiding transportation decisions.

The Transportation Equity Act of the 21st Century (TEA-21)

The Transportation Equity Act for the 21st Century (TEA-21) was signed into law in 1998 and builds upon the initiatives established in the ISTEA legislation, discussed above. TEA-21 authorizes highway, highway safety, transit, and other efficient surface transportation programs. TEA-21 continues the program structure established for highways and transit under ISTEA, such as flexibility in the use of funds, emphasis on measures to improve the environment, and focus on a strong planning process as the foundation of good transportation decisions. TEA-21 also provides for investment in research and its application to maximize the performance of the transportation system through, for example, deployment of Intelligent Transportation Systems, to help improve operations and management of transportation systems and vehicle safety.

State Regulations

Integrated Energy Policy Report (IEPR)

Senate Bill 1389 requires the California Energy Commission (CEC) to prepare a biennial integrated energy policy report that assesses major energy trends and issues facing the State's electricity, natural gas, and transportation fuel sectors and provides policy recommendations to conserve resources; protect the environment; ensure reliable, secure, and diverse energy supplies; enhance the state's economy; and protect public health and safety. The Energy Commission prepares these assessments and associated policy recommendations every two years, with updates in alternate years, as part of the Integrated Energy Policy Report.

The 2019 Integrated Energy Policy Report (2019 IEPR) was adopted February 20, 2020, and continues to work towards improving electricity, natural gas, and transportation fuel energy use in California. The 2019 IEPR focuses on a variety of topics such as decarbonizing buildings, integrating renewables, energy efficiency, energy equity, integrating renewable energy, updates on Southern California electricity reliability, climate adaptation activities for the energy sector, natural gas assessment, transportation energy demand forecast, and the California Energy Demand Forecast.[58]

State of California Energy Plan

The CEC is responsible for preparing the State Energy Plan, which identifies emerging trends related to energy supply, demand, conservation, public health and safety, and the maintenance of a healthy economy. The Plan calls for the state to assist in the transformation of the transportation system to improve air quality, reduce congestion, and increase the efficient use of fuel supplies with the least environmental and energy costs. To further this policy, the plan identifies a number of strategies, including assistance to public agencies and fleet operators and encouragement of urban designs that reduce vehicle miles traveled and accommodate pedestrian and bicycle access.

[58] California Energy Commission. Final 2019 Integrated Energy Policy Report. February 20, 2020. https://www.energy.ca.gov/data-reports/reports/integrated-energy-policy-report/2019-integrated-energy-policy-report

California Building Standards Code (Title 24)

The California Building Standards Code Title 24 was previously discussed in Section 4 of this report.

California Building Energy Efficiency Standards (Title 24, Part 6)

The California Building Energy Efficiency Standards for Residential and Nonresidential Buildings (California Code of Regulations, Title 24, Part 6) were adopted to ensure that building construction and system design and installation achieve energy efficiency and preserve outdoor and indoor environmental quality. The current California Building Energy Efficiency Standards (Title 24 standards) are the 2019 Title 24 standards, which became effective on January 1, 2020. The 2019 Title 24 standards include efficiency improvements to the lighting and efficiency improvements to the non-residential standards include alignment with the American Society of Heating and Air-Conditioning Engineers. For example, window operation is no longer a method allowed to meet ventilation requirements, continuous operation of central forced air system handlers used in central fan integrated ventilation system is not a permissible method of providing the dwelling unit ventilation airflow, and central ventilation systems that serve multiple dwelling units must be balanced to provide ventilation airflow to each dwelling unit. In addition, requirements for kitchen range hoods were also provided in the updated Section 120.1. Ventilation and Indoor Air Quality included both additions and revisions in the 2019 Code. This section now requires nonresidential and hotel/motel buildings to have air filtration systems that use forced air ducts to supply air to occupiable spaces to have air filters. Further, the air filter efficiency must be either MERV 13 or use a particle size efficiency rating specific in the Energy Code AND be equipped with air filters with a minimum 2-inch depth or minimum 1-inch depth if sized according to the equation 120.1-A. If natural ventilation is to be used the space must also use mechanical unless ventilation openings are either permanently open or controlled to stay open during occupied times.

New regulations were also adopted under Section 130.1 Indoor Lighting Controls. These included new exceptions being added for restrooms, the exception for classrooms being removed, as well as exceptions in regard to sunlight provided through skylights and overhangs.

All buildings for which an application for a building permit is submitted on or after January 1, 2020 must follow the 2019 standards. The 2016 residential standards were estimated to be approximately 28 percent more efficient than the 2013 standards, whereas the 2019 residential standards are estimated to be approximately 7 percent more efficient than the 2016 standards. Furthermore, once rooftop solar electricity generation is factored in, 2019 residential standards are estimated to be approximately 53 percent more efficient than the 2016 standards. Under the 2019 standards, nonresidential buildings are estimated to be approximately 30 percent more efficient than the 2016 standards. Energy efficient buildings require less electricity; therefore, increased energy efficiency reduces fossil fuel consumption and decreases greenhouse gas emissions.

The 2022 Building Energy Efficiency Standards became effective on January 1, 2023. [59] The core focus of the building standards has been efficiency, but the 2019 Energy Code ventured into onsite generation by requiring solar PV on new homes, providing significant GHG savings. The 2022 update builds off this progress with expanded solar standards and the move to onsite energy storage that will help Californians save on utility bills while bolstering the grid. The 2022 Energy Code update focuses on four key areas in new construction of homes and businesses:

- Encouraging electric heat pump technology and use, which consumes less energy and produces fewer emissions than traditional HVACs and water heaters.
- Establishing electric-ready requirements when natural gas is installed, which positions owners to use cleaner electric heating, cooking and electric vehicle (EV) charging options whenever they choose to adopt those technologies.

[59] California Energy Commission (CEC). 2022. Building Energy Efficiency Standards. https://www.energy.ca.gov/programs-and-topics/programs/building-energy-efficiency-standards/2022-building-energy-efficiency.

- Expanding solar photovoltaic (PV) system and battery storage standards to make clean energy available onsite and complement the state's progress toward a 100 percent clean electricity grid.
- Strengthening ventilation standards to improve indoor air quality.

The 2022 Energy Code affects homes by establishing energy budgets based on efficient heat pumps for space or water heating to encourage builders to install heat pumps over gas-fueled HVAC units; requiring homes to be electric-ready, with dedicated 240-volt outlets and space (with plumbing for water heaters) so electric appliances can eventually replace installed gas appliances; increasing minimum kitchen ventilation requirements so that fans over cooktops have higher airflow or capture efficiency to better exhaust pollution from gas cooking and improve indoor air quality; and allowing exceptions to existing solar PV standards when roof area is not available (such as for smaller homes). In addition, the effect on businesses includes establishing combined solar PV and battery standards for select businesses with systems being sized to maximize onsite use of solar energy and avoid electricity demand during times when the grid must use gas-powered plants; establishing new efficiency standards for commercial greenhouses (primarily cannabis growing); and improving efficiency standards for building envelope, various internal.

California Building Energy Efficiency Standards (Title 24, Part 11)

The 2019 California Green Building Standards Code (California Code of Regulations, Title 24, Part 11), commonly referred to as the CALGreen Code, went into effect on January 1, 2020. The 2019 CALGreen Code includes mandatory measures for non-residential development related to site development; energy efficiency; water efficiency and conservation; material conservation and resource efficiency; and environmental quality.

As previously discussed in Section 3 of this report, the Department of Housing and Community Development (HCD) updated CALGreen through the 2019 Triennial Code Adoption Cycle. HCD modified the best management practices for stormwater pollution prevention adding Section 5.106.2 for projects that disturb one or more acres of land. This section requires projects that disturb one acre or more of land or less than one acre of land but are part of a larger common plan of development or sale must comply with the postconstruction requirement detailed in the applicable National Pollutant Discharge Elimination System (NPDES) General Permit for Stormwater Discharges Associated with Construction and Land Disturbance Activities issued by the State Water Resources Control Board. The NPDES permits require postconstruction runoff (post-project hydrology) to match the preconstruction runoff pre-project hydrology) with installation of postconstruction stormwater management measures.

HCD added sections 5.106.4.1.3 and 5.106.4.1.5 in regard to bicycle parking. Section 5.106.4.1.3 requires new buildings with tenant spaces that have 10 or more tenant-occupants, provide secure bicycle parking for 5 percent of the tenant-occupant vehicular parking spaces with a minimum of one bicycle parking facility. In addition, Section 5.106.4.1.5 states that acceptable bicycle parking facility for Sections 5.106.4.1.2 through 5.106.4.1.4 shall be convenient from the street and shall meeting one of the following: (1) covered, lockable enclosures with permanently anchored racks for bicycles; (2) lockable bicycle rooms with permanently anchored racks; or (3) lockable, permanently anchored bicycle lockers.

HCD amended section 5.106.5.3.5 allowing future charging spaces to qualify as designated parking for clean air vehicles.

HCD updated section 5.303.3.3 in regard to showerhead flow rates. This update reduced the flow rate to 1.8 GPM.

HCD amended section 5.304.1 for outdoor potable water use in landscape areas and repealed sections 5.304.2 and 5.304.3. The update requires nonresidential developments to comply with a local water efficient landscape ordinance or the current California Department of Water Resource's' Model Water Efficient

Landscape Ordinance (MWELO), whichever is more stringent. Some updates were also made in regard to the outdoor potable water use in landscape areas for public schools and community colleges.

HCD updated Section 5.504.5.3 in regard to the use of MERV filters in mechanically ventilated buildings. This update changed the filter use from MERV 8 to MERV 13. MERV 13 filters are to be installed prior to occupancy, and recommendations for maintenance with filters of the same value shall be included in the operation and maintenance manual.

The 2022 California Green Building Standards Code became effective on January 1, 2023.[60]

HCD amended Section 5.106.5.3 in regard to increasing the EV capable space percentages and adding a new requirement for installed Level 2 DCFC chargers.

HCD under Section 5.106.5.4 added new regulation for electric vehicle charging readiness requirements for new construction of warehouse, grocery stores, and retail stores with planned off-street loading spaces. [61]

Senate Bill 100

Senate Bill 100 (SB 100) requires 100 percent of total retail sales of electricity in California to come from eligible renewable energy resources and zero-carbon resources by December 31, 2045. SB 100 was adopted September 2018.

The interim thresholds from prior Senate Bills and Executive Orders would also remain in effect. These include Senate Bill 1078 (SB 1078), which requires retail sellers of electricity, including investor-owned utilities and community choice aggregators, to provide at least 20 percent of their supply from renewable sources by 2017. Senate Bill 107 (SB 107) which changed the target date to 2010. Executive Order S-14-08, which was signed on November 2008 and expanded the State's Renewable Energy Standard to 33 percent renewable energy by 2020. Executive Order S-21-09 directed the CARB to adopt regulations by July 31, 2010 to enforce S-14-08. Senate Bill X1-2 codifies the 33 percent renewable energy requirement by 2020.

Senate Bill 350

As previously discussed in Section 4 of this report, Senate Bill 350 (SB 350) was signed into law October 7, 2015, SB 350 increases California's renewable electricity procurement goal from 33 percent by 2020 to 50 percent by 2030. This will increase the use of Renewables Portfolio Standard (RPS) eligible resources, including solar, wind, biomass, geothermal, and others. In addition, SB 350 requires the state to double statewide energy efficiency savings in electricity and natural gas end uses by 2030. To help ensure these goals are met and the greenhouse gas emission reductions are realized, large utilities will be required to develop and submit Integrated Resource Plans (IRPs). These IRPs will detail how each entity will meet their customers resource needs, reduce greenhouse gas emissions and ramp up the deployment of clean energy resources.

Assembly Bill 32

As discussed in Section 4 of this report, in 2006 the California State Legislature adopted Assembly Bill 32 (AB 32), the California Global Warming Solutions Act of 2006. AB 32 requires CARB, to adopt rules and regulations that would achieve GHG emissions equivalent to statewide levels in 1990 by 2020 through an enforceable statewide emission cap which will be phased in starting in 2012. Emission reductions shall include carbon sequestration projects that would remove carbon from the atmosphere and best management practices that are technologically feasible and cost effective. Please see Section 4 for further detail on AB 32.

[60] California Building Standards Commission (CBSC). 2022. California Green Building Standards. Website: https://codes.iccsafe.org/content/CAGBC2022P1.

[61] https://www.dgs.ca.gov/BSC/Resources/2022-Title-24-California-Code-Changes

Assembly Bill 1493/Pavley Regulations

As discussed in Section 4 of this report, California Assembly Bill 1493 enacted on July 22, 2002, required CARB to develop and adopt regulations that reduce GHGs emitted by passenger vehicles and light duty trucks. In 2005, the CARB submitted a "waiver" request to the EPA from a portion of the federal Clean Air Act in order to allow the State to set more stringent tailpipe emission standards for CO_2 and other GHG emissions from passenger vehicles and light duty trucks. On December 19, 2007 the EPA announced that it denied the "waiver" request. On January 21, 2009, CARB submitted a letter to the EPA administrator regarding the State's request to reconsider the waiver denial. The EPA approved the waiver on June 30, 2009.

Executive Order S-1-07/Low Carbon Fuel Standard

As discussed in Section 4 of this report, Executive Order S-1-07 was issued in 2007 and proclaims that the transportation sector is the main source of GHG emissions in the State, since it generates more than 40 percent of the State's GHG emissions. It establishes a goal to reduce the carbon intensity of transportation fuels sold in the State by at least ten percent by 2020. This Order also directs CARB to determine whether this Low Carbon Fuel Standard (LCFS) could be adopted as a discrete early-action measure as part of the effort to meet the mandates in AB 32.

On April 23, 2009 CARB approved the proposed regulation to implement the low carbon fuel standard. The low carbon fuel standard is anticipated to reduce GHG emissions by about 16 MMT per year by 2020. The low carbon fuel standard is designed to provide a framework that uses market mechanisms to spur the steady introduction of lower carbon fuels. The framework establishes performance standards that fuel producers and importers must meet each year beginning in 2011. Separate standards are established for gasoline and diesel fuels and the alternative fuels that can replace each. The standards are "back-loaded", with more reductions required in the last five years, than during the first five years. This schedule allows for the development of advanced fuels that are lower in carbon than today's fuels and the market penetration of plug-in hybrid electric vehicles, battery electric vehicles, fuel cell vehicles, and flexible fuel vehicles. It is anticipated that compliance with the low carbon fuel standard will be based on a combination of both lower carbon fuels and more efficient vehicles.

Reformulated gasoline mixed with corn-derived ethanol at ten percent by volume and low sulfur diesel fuel represent the baseline fuels. Lower carbon fuels may be ethanol, biodiesel, renewable diesel, or blends of these fuels with gasoline or diesel as appropriate. Compressed natural gas and liquefied natural gas also may be low carbon fuels. Hydrogen and electricity, when used in fuel cells or electric vehicles are also considered as low carbon fuels for the low carbon fuel standard.

California Air Resources Board

CARB's Advanced Clean Cars Program

Closely associated with the Pavley regulations, the Advanced Clean Cars emissions control program was approved by CARB in 2012. The program combines the control of smog, soot, and GHGs with requirements for greater numbers of zero-emission vehicles for model years 2015–2025.15 The components of the Advanced Clean Cars program include the Low-Emission Vehicle (LEV) regulations that reduce criteria pollutants and GHG emissions from light- and medium-duty vehicles, and the Zero-Emission Vehicle (ZEV) regulation, which requires manufacturers to produce an increasing number of pure ZEVs (meaning battery electric and fuel cell electric vehicles), with provisions to also produce plug-in hybrid electric vehicles (PHEV) in the 2018 through 2025 model years.[62]

[62] California Air Resources Board, California's Advanced Clean Cars Program, January 18, 2017. www.arb.ca.gov/msprog/acc/acc.htm.

Airborne Toxic Control Measure to Limit Diesel-Fueled Commercial Motor Vehicle Idling

The Airborne Toxic Control Measure to Limit Diesel-Fueled Commercial Motor Vehicle Idling (Title 13, California Code of Regulations, Division 3, Chapter 10, Section 2435) was adopted to reduce public exposure to diesel particulate matter and other air contaminants by limiting the idling of diesel-fueled commercial motor vehicles. This section applies to diesel-fueled commercial motor vehicles with gross vehicular weight ratings of greater than 10,000 pounds that are or must be licensed for operation on highways. Reducing idling of diesel-fueled commercial motor vehicles reduces the amount of petroleum-based fuel used by the vehicle.

Regulation to Reduce Emissions of Diesel Particulate Matter, Oxides of Nitrogen, and other Criteria Pollutants, form In-Use Heavy-Duty Diesel-Fueled Vehicles

The Regulation to Reduce Emissions of Diesel Particulate Matter, Oxides of Nitrogen and other Criteria Pollutants, from In-Use Heavy-Duty Diesel-Fueled Vehicles (Title 13, California Code of Regulations, Division 3, Chapter 1, Section 2025) was adopted to reduce emissions of diesel particulate matter, oxides of nitrogen (NOX) and other criteria pollutants from in-use diesel-fueled vehicles. This regulation is phased, with full implementation by 2023. The regulation aims to reduce emissions by requiring the installation of diesel soot filters and encouraging the retirement, replacement, or repower of older, dirtier engines with newer emission-controlled models. The newer emission-controlled models would use petroleum-based fuel in a more efficient manner.

Sustainable Communities Strategy

The Sustainable Communities and Climate Protection Act of 2008, or Senate Bill 375 (SB 375), coordinates land use planning, regional transportation plans, and funding priorities to help California meet the GHG reduction mandates established in AB 32.

As previously stated in Section 4 of this report, Senate Bill 375 (SB 375) was adopted September 2008 and aligns regional transportation planning efforts, regional GHG emission reduction targets, and land use and housing allocation. SB 375 requires Metropolitan Planning Organizations (MPO) to adopt a sustainable communities strategy (SCS) or alternate planning strategy (APS) that will prescribe land use allocation in that MPOs Regional Transportation Plan (RTP). CARB, in consultation with each MPO, will provide each affected region with reduction targets for GHGs emitted by passenger cars and light trucks in the region for the years 2020 and 2035. These reduction targets will be updated every eight years but can be updated every four years if advancements in emissions technologies affect the reduction strategies to achieve the targets. CARB is also charged with reviewing each MPO's sustainable communities strategy or alternate planning strategy for consistency with its assigned targets.

The proposed project is located within the Southern California Association of Governments (SCAG) jurisdiction, which has authority to develop the SCS or APS. For the SCAG region, the targets set by CARB are at eight percent below 2005 per capita GHG emissions levels by 2020 and 19 percent below 2005 per capita GHG emissions levels by 2035. These reduction targets became effective October 2018.

PROJECT ENERGY DEMANDS AND ENERGY EFFICIENCY MEASURES

Evaluation Criteria

In compliance with Appendix G of the State CEQA Guidelines, this report analyzes the project's anticipated energy use to determine if the project would:

- Result in potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources, during project construction or operation; or

- Conflict with or obstruct a state or local plan for renewable energy or energy efficiency.

In addition, Appendix F of the State CEQA Guidelines states that the means of achieving the goal of energy conservation includes the following:

- Decreasing overall per capita energy consumption;
- Decreasing reliance on fossil fuels such as coal, natural gas and oil; and
- Increasing reliance on renewable energy sources.

Methodology

Information from the CalEEMod 2022.1.1.14 Output contained in Appendix B, utilized for air quality and greenhouse gas analyses in Sections 2 and 4 of this report, were also utilized for this analysis. The CalEEMod output details project related construction equipment, transportation energy demands, and facility energy demands.

Construction Energy Demands

The construction schedule is anticipated to occur between the beginning of July 2024 and the beginning of April 2025 and be completed in one phase. Staging of construction vehicles and equipment will occur on-site. The approximately nine-month schedule is relatively short and the project site is approximately 20.14 acres.

Construction Equipment Electricity Usage Estimates

As stated previously, Electrical service will be provided by Southern California Edison. The focus within this section is the energy implications of the construction process, specifically the power cost from on-site electricity consumption during construction of the proposed project. Based on the 2021 National Construction Estimator, Richard Pray (2021)[63], the typical power cost per 1,000 square feet of building construction per month is estimated to be $2.37. The project plans to develop the site with a 301,101 square foot warehouse. Based on Table 24, the total power cost of the on-site electricity usage during the construction of the proposed project is estimated to be approximately $6,422.48.

Construction Equipment Fuel Estimates

Fuel consumed by construction equipment would be the primary energy resource expended over the course of project construction. Fuel consumed by construction equipment was evaluated with the following assumptions:

- Construction schedule of 9 months
- All construction equipment was assumed to run on diesel fuel
- Typical daily use of 8 hours, with some equipment operating from ~6-7 hours
- Aggregate fuel consumption rate for all equipment was estimated at 18.5 hp-hr/gallon (from CARB's 2017 Emissions Factors Tables and fuel consumption rate factors as shown in Table D-21 of the Moyer Guidelines: (https://www.arb.ca.gov/msprog/moyer/guidelines/2017gl/2017_gl_appendix_d.pdf).
- Diesel fuel would be the responsibility of the equipment operators/contractors and would be sources within the region.
- Project construction represents a "single-event" for diesel fuel demand and would not require on-going or permanent commitment of diesel fuel resources during long term operation.

Using the CalEEMod data input for the air quality and greenhouse gas analyses (Sections 2 and 4 of this report), the project's construction phase would consume electricity and fossil fuels as a single energy demand,

[63] Pray, Richard. 2017 National Construction Estimator. Carlsbad : Craftsman Book Company, 2017.

that is, once construction is completed their use would cease. CARB's 2017 Emissions Factors Tables show that on average, aggregate fuel consumption (gasoline and diesel fuel) would be approximately 18.5 hp-hr-gal. Table 25 shows the results of the analysis of construction equipment.

As presented in Table 25, project construction activities would consume an estimated 38,095 gallons of diesel fuel. As stated previously, project construction would represent a "single-event" diesel fuel demand and would not require on-going or permanent commitment of diesel fuel resources for this purpose.

Construction Worker Fuel Estimates

It is assumed that construction worker trips are from light duty autos (LDA), light duty truck 1 (LDT1), and light duty truck 2 (LDT2) at a mix of 25 percent/50 percent/25 percent, respectively, along area roadways.[64] Data regarding project related construction worker trips were based on CalEEMod 2022.1.1.14 model defaults.

Vehicle fuel efficiencies for construction workers were estimated in the air quality and greenhouse gas analyses (Sections 2 and 4 of this report) using information generated using CARB's 2021 EMFAC model (see Appendix B for details). An aggregate fuel efficiency of 26.02 miles per gallon (mpg) was used to calculate vehicle miles traveled for construction worker trips. Table 26 shows that an estimated 14,620 gallons of fuel would be consumed for construction worker trips.

Construction Vendor/Hauling Fuel Estimates

Tables 27 and 28 show the estimated fuel consumption for vendor and hauling during grading and building construction. With respect to estimated VMT, the vendor and hauling trips would generate an estimated 104,202 VMT. Data regarding project related construction worker trips were based on CalEEMod 2022.1.1.14 model defaults.

For the architectural coatings it is assumed that the contractors would be responsible for bringing coatings and equipment with them in their light duty vehicles. Therefore, vendors delivering construction material or hauling debris from the site during grading and building construction would use medium to heavy duty vehicles with an average fuel consumption of 7.75 mpg for medium heavy-duty trucks and 6.05 for heavy heavy-duty trucks (see Appendix B for details). [65] Tables 27 and 28 show that an estimated 15,684 gallons of fuel would be consumed for vendor and hauling trips.

Construction Energy Efficiency/Conservation Measures

Construction equipment used over the approximately nine-month construction phase would conform to CARB regulations and California emissions standards and is evidence of related fuel efficiencies. There are no unusual project characteristics or construction processes that would require the use of equipment that would be more energy intensive than is used for comparable activities; or equipment that would not conform to current emissions standards (and related fuel efficiencies). Equipment employed in construction of the project would therefore not result in inefficient wasteful, or unnecessary consumption of fuel.

The project would utilize construction contractors which practice compliance with applicable CARB regulation regarding retrofitting, repowering, or replacement of diesel off-road construction equipment. Additionally, CARB has adopted the Airborne Toxic Control Measure to limit heavy-duty diesel motor vehicle idling in order to reduce public exposure to diesel particulate matter and other Toxic Air Contaminants. Compliance with

[64] CalEEMod User's Guide Appendix C (April 2022) states that construction work trips are made by a fleet consisting of 25 percent light-duty auto (or passenger car), 50 percent light-duty truck type 1 (LDT1), and 25 percent light duty truck type 2 (LDT2).

[65] CalEEMod User's Guide Appendix C (April 2022) states that vendor trips are made by a fleet consisting of 50 percent medium trucks (MHDT) and 50 percent heavy trucks (HHDT) and that hauling and onsite truck trips are made by a fleet consisting of 100 percent HHDT.

these measures would result in a more efficient use of construction-related energy and would minimize or eliminate wasteful or unnecessary consumption of energy. Idling restrictions and the use of newer engines and equipment would result in less fuel combustion and energy consumption.

Additionally, as required by California Code of Regulations Title 13, Motor Vehicles, section 2449(d)(3) Idling, limits idling times of construction vehicles to no more than five minutes, thereby minimizing or eliminating unnecessary and wasteful consumption of fuel due to unproductive idling of construction equipment. Enforcement of idling limitations is realized through periodic site inspections conducted by County building officials, and/or in response to citizen complaints.

Operational Energy Demands

Energy consumption in support of or related to project operations would include transportation energy demands (energy consumed by employee and patron vehicles accessing the project site) and facilities energy demands (energy consumed by building operations and site maintenance activities).

Transportation Fuel Consumption

Using the CalEEMod output from the air quality and greenhouse gas analyses (Sections 2 and 4 of this report), it is assumed that an average trip for autos and light trucks was assumed to be 23.5 miles and 2 to 4-axle trucks were assumed to travel an average of 40 miles.[66] As the project includes the development of the site with warehouse uses; therefore, in order to present a worst-case scenario it was assumed that vehicles would operate 365 days per year. Table 29 shows the estimated annual fuel consumption for all classes of vehicles from autos to heavy-heavy trucks.[67]

The proposed project would generate 544 trips per day. The vehicle fleet mix was used from the CalEEMod output. Table 29 shows that an estimated 286,949 gallons of fuel would be consumed per year for the operation of the proposed project.

Trip generation and VMT generated by the proposed project are consistent with other similar industrial uses of similar scale and configuration as reflected respectively in the Institute of Transportation Engineers (ITE) Trip Generation Manual (11th Edition, 2021). That is, the proposed project does not propose uses or operations that would inherently result in excessive and wasteful vehicle trips and VMT, nor associated excess and wasteful vehicle energy consumption. Furthermore, the state of California consumed approximately 4.2 billion gallons of diesel and 15.1 billion gallons of gasoline in 2015.[68,69] Therefore, the increase in fuel consumption from the proposed project is insignificant in comparison to the State's demand. Therefore, project transportation energy consumption would not be considered inefficient, wasteful, or otherwise unnecessary.

Facility Energy Demands (Electricity and Natural Gas)

Building operation and site maintenance (including landscape maintenance) would result in the consumption of electricity (provided by Southern California Edison) and natural gas (provided by Southern California Gas Company). The annual natural gas and electricity demands were provided per the CalEEMod output from the air quality and greenhouse gas analyses (Sections 2 and 4 of this report) and are provided in Table 30.

[66] CalEEMod default distance for H-W (home-work) is 23.5 miles and 18.1 miles for W-O (work-other) (with customer based trips changed to 40 miles per SCAQMD recommendations).

[67] Average fuel economy based on aggregate mileage calculated in EMFAC 2021 for opening year (2025). See Appendix B for EMFAC output.

[68] https://www.energy.ca.gov/data-reports/energy-almanac/transportation-energy/california-gasoline-data-facts-and-statistics

[69] https://www.energy.ca.gov/data-reports/energy-almanac/transportation-energy/diesel-fuel-data-facts-and-statistics

As shown in Table 30, the estimated electricity demand for the proposed project is approximately 1,483,306 kWh per year. In 2021, the non-residential sector of the County of Riverside consumed approximately 8,257 million kWh of electricity.[70] In addition, the estimated natural gas consumption for the proposed project is approximately 5,748,675 kBTU per year. In 2021, the non-residential sector of the County of Riverside consumed approximately 144 million therms of gas.[71] Therefore, the increase in both electricity and natural gas demand from the proposed project is insignificant compared to the County's 2021 non-residential sector demand.

Energy use in buildings is divided into energy consumed by the built environment and energy consumed by uses that are independent of the construction of the building such as in plug-in appliances. In California, the California Building Standards Code Title 24 governs energy consumed by the built environment, mechanical systems, and some types of fixed lighting. Non-building energy use, or "plug-in" energy use can be further subdivided by specific end-use (refrigeration, cooking, appliances, etc.).

Furthermore, the proposed project energy demands in total would be comparable to other non-residential projects of similar scale and configuration. Therefore, the project facilities' energy demands and energy consumption would not be considered inefficient, wasteful, or otherwise unnecessary.

Renewable Energy and Energy Efficiency Plan Consistency

Regarding federal transportation regulations, the project site is located in an already developed area. Access to/from the project site is from existing roads. These roads are already in place so the project would not interfere with, nor otherwise obstruct intermodal transportation plans or projects that may be proposed pursuant to the ISTEA because SCAG is not planning for intermodal facilities in the project area.

Regarding the State's Energy Plan and compliance with Title 24 CCR energy efficiency standards, the applicant is required to comply with the California Green Building Standard Code requirements for energy efficient buildings and appliances as well as utility energy efficiency programs implemented by Southern California Edison and Southern California Gas Company.

Regarding Pavley (AB 1493) regulations, an individual project does not have the ability to comply or conflict with these regulations because they are intended for agencies and their adoption of procedures and protocols for reporting and certifying GHG emission reductions from mobile sources. However, the vehicles associated with the proposed project would be required to comply with federal and state fuel efficiency standards.

Regarding the State's Renewable Energy Portfolio Standards, the project would be required to meet or exceed the energy standards established in the California Green Building Standards Code, Title 24, Part 11 (CALGreen). CALGreen Standards require that new buildings reduce water consumption, employ building commissioning to increase building system efficiencies, divert construction waste from landfills, and install low pollutant-emitting finish materials.

As shown in Section 4 above, the proposed project would be consistent with the applicable strategies of the City of Perris CAP.

Conclusions

As supported by the preceding analyses, project construction and operations would not result in the inefficient, wasteful or unnecessary consumption of energy. The proposed project does not include any unusual project characteristics or construction processes that would require the use of equipment that would be more energy intensive than is used for comparable activities and is industrial project that is not proposing

[70] California Energy Commission, Electricity Consumption by County. https://ecdms.energy.ca.gov/elecbycounty.aspx

[71] California Energy Commission, Gas Consumption by County. http://ecdms.energy.ca.gov/gasbycounty.aspx

any additional features that would require a larger energy demand than other industrial projects of similar scale and configuration. The energy demands of the project are anticipated to be accommodated within the context of available resources and energy delivery systems. The project would therefore not cause or result in the need for additional energy producing or transmission facilities. The project would not engage in wasteful or inefficient uses of energy and aims to achieve energy conservations goals within the State of California. Notwithstanding, the project proposes industrial warehouse uses and will not have any long-term effects on an energy provider's future energy development or future energy conservation strategies.

Table 22
Total Electricity System Power (California 2021)

Fuel Type	California In-State Generation (GWh)	Percent of California In-State Generation	Northwest Imports (GWh)	Southwest Imports (GWh)	Total Imports (GWh)	Percent of Imports	Total California Energy Mix (GWh)	Total California Power Mix
Coal	303	0.20%	181	7,788	7,969	9.50%	8,272	3.00%
Natural Gas	97,431	50.20%	45	7,880	7,925	9.50%	105,356	37.90%
Oil	37	0.00%	-	-	-	0.00%	37	0.00%
Other (Waste Heat/Petroleum Coke)	382	0.20%	68	15	83	0.10%	465	0.20%
Nuclear	16,477	8.50%	524	8756	9281	11.10%	25,758	9.30%
Large Hydro	12,036	6.20%	12,042	1,578	13,620	16.30%	25,656	9.20%
Unspecified Sources of Power	-	0.00%	8,156	10,731	18,887	22.60%	18,887	6.80%
Renewables	67,461	34.80%	11,555	14,317	25,872	30.90%	93,333	33.60%
Biomass	5,381	2.80%	864	26	890	1.10%	6,271	2.30%
Geothermal	11,116	5.70%	192	1,906	2,098	2.50%	13,214	4.80%
Small Hydro	2,531	1.30%	304	1	304	0.40%	2,835	1.00%
Solar	33,260	17.10%	220	5,979	6,199	7.40%	39,458	14.20%
Wind	15,173	7.80%	9,976	6,405	16,381	19.60%	31,555	11.40%
Total	194,127	100%	32,572	51,064	83,636	100%	277,764	100%

Notes:

(1) Source: California Energy Commission. 2021 Total System Electric Generation. https://www.energy.ca.gov/data-reports/energy-almanac/california-electricity-data/2021-total-system-electric-generation

Table 23
SCE 2021 Power Content Mix

Energy Resources	2021 SCE Power Mix
Eligible Renewable	31.4%
Biomass & Biowaste	*0.1%*
Geothermal	*5.7%*
Eligible Hydroelectric	*0.5%*
Solar	*14.9%*
Wind	*10.2%*
Coal	0.0%
Large Hydroelectric	2.3%
Natural Gas	22.3%
Nuclear	9.2%
Other	0.2%
Unspecified Sources of power*	34.6%
Total	100%

Notes:

(1) Source: https://www.energy.ca.gov/filebrowser/download/4676

* Unspecified sources of power means electricity from transactions that are not traceable to specific generation sources.

Table 24
Project Construction Power Cost and Electricity Usage

Power Cost (per 1,000 square foot of building per month of construction)	Total Building Size (1,000 Square Foot)	Construction Duration (months)	Total Project Construction Power Cost
$2.37	301.101	9	$6,422.48

Table 25
Construction Equipment Fuel Consumption Estimates

Phase	Number of Days	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor	HP hrs/day	Total Fuel Consumption (gal diesel fuel)[1]
Grading	30	Graders	1	8	148	0.41	485	787
	30	Excavator	2	8	36	0.38	219	355
	30	Tractors/Loaders/Backhoes	2	8	84	0.37	497	806
	30	Scrapers	2	8	423	0.48	3,249	5,268
	30	Rubber Tired Dozers	1	8	367	0.40	1,174	1,904
Building Construction	150	Forklifts	4	8	82	0.20	525	4,255
	150	Generator Sets	2	8	14	0.74	166	1,344
	150	Cranes	2	7	367	0.29	1,490	12,081
	150	Welders	2	8	46	0.45	331	2,685
	150	Tractors/Loaders/Backhoes	4	7	84	0.37	870	7,056
Paving	20	Pavers	2	8	81	0.42	544	588
	20	Paving Equipment	2	8	89	0.36	513	554
	20	Rollers	2	8	36	0.38	219	237
Architectural Coating	30	Air Compressors	1	6	37	0.48	107	173
CONSTRUCTION FUEL DEMAND (gallons of diesel fuel)								38,095

Notes:

(1) Using Carl Moyer Guidelines Table D-21 Fuel consumption rate factors (bhp-hr/gal) for engines less than 750 hp. (Source: https://www.arb.ca.gov/msprog/moyer/guidelines/2017gl/2017_gl_appendix_d.pdf)

Table 26
Construction Worker Fuel Consumption Estimates

Phase	Number of Days	Worker Trips/Day	Trip Length (miles)	Vehicle Miles Traveled	Average Vehicle Fuel Economy (mpg)	Estimated Fuel Consumption (gallons)
Grading	30	20	18.5	11,100	26.02	427
Building Construction	150	126	18.5	349,650	26.02	13,440
Paving	20	15	18.5	5,550	26.02	213
Architectural Coating	30	25.3	18.5	14,042	26.02	540
Total Construction Worker Fuel Consumption						14,620

Notes:

(1) Assumptions for the worker trip length and vehicle miles traveled are consistent with CalEEMod 2022.1.1.14 defaults.

(2) Per CalEEMod User's Guide Appendix C (April 2022), CalEEMod assumes that construction work trips are made by a fleet consisting of 25 percent light-duty auto (or passenger car), 50 percent light-duty truck type 1 (LDT1), and 25 percent light duty truck type 2 (LDT2).

Table 27
Construction Vendor Fuel Consumption Estimates (MHD & HHD Trucks)

Phase	Number of Days	Vendor Trips/Day	Trip Length (miles)	Vehicle Miles Traveled	Average Vehicle Fuel Economy (mpg)	Estimated Fuel Consumption (gallons)
Grading	30	0	10.2	0	6.90	0
Building Construction	150	49.4	10.2	75,582	6.90	10,954
Paving	20	0	10.2	0	6.90	0
Architectural Coating	30	0	10.2	0	6.90	0
Total Construction Vendor Fuel Consumption						10,954

Notes:

(1) Assumptions for the vendor trip length and vehicle miles traveled are consistent with CalEEMod 2022.1.1.14 defaults.

(2) Per CalEEMod User's Guide Appendix C (April 2022), CalEEMod assumes vendor trips are made by a fleet consisting of 50 percent medium trucks (MHDT) and 50 percent heavy trucks (HHDT).

Table 28
Construction Hauling Fuel Consumption Estimates (HHD Trucks)[1]

Phase	Number of Days	Total Hauling Trips	Trip Length (miles)	Vehicle Miles Traveled	Average Vehicle Fuel Economy (mpg)	Estimated Fuel Consumption (gallons)
Grading	30	47.7	20	28,620	6.05	4,731
Building Construction	150	0	20	0	6.05	0
Paving	20	0	20	0	6.05	0
Architectural Coating	30	0	20	0	6.05	0
Total Construction Hauling Fuel Consumption						4,731

Notes:

(1) Assumptions for the hauling trip length and vehicle miles traveled are consistent with CalEEMod Version 2022.1.1.14 defaults.

(2) Per CalEEMod User's Guide Appendix C (April 2022), CalEEMod assumes hauling and onsite truck trips are made by a fleet consisting of 100 percent HHDT.

Table 29
Estimated Vehicle Operations Fuel Consumption

Vehicle Type	Vehicle Mix	Number of Vehicles	Average Trip (miles)[1]	Daily VMT	Average Fuel Economy (mpg)[2]	Total Gallons per Day	Total Annual Fuel Consumption (gallons)
Light Auto	Automobile	257	23.5	6,037	32.23	187.31	68,367
Light Truck	Automobile	20	23.5	470	24.83	18.92	6,906
Light Truck	Automobile	104	23.5	2,443	24.45	99.92	36,470
Light Heavy Truck	2-Axle Truck	8	40.0	320	16.02	19.98	7,291
Light Heavy Truck 10,000 lbs +	2-Axle Truck	2	40.0	80	15.23	5.25	1,917
Motorcycle	Automobile	12	23.5	282	41.66	6.77	2,470
Medium Truck	Automobile	83	23.5	1,950	20.06	97.19	35,475
Motor Home	--	0	40.0	0	5.76	0.00	0
Medium Heavy Truck	3-Axle Truck	14	40.0	560	7.87	71.16	25,972
Other Bus	--	0	40.0	0	6.18	0.00	0
School Bus	--	0	40.0	0	6.52	0.00	0
Urban Bus	--	0	40.0	0	3.51	0.00	0
Heavy Heavy Truck	4-Axle Truck	43	40.0	1,720	6.15	279.67	102,081
Total		544	--	13,861	-	786.16	--
Total Annual Fuel Consumption							286,949

Notes:

(1) Based on the size of the site and relative location, trips were assumed to be local rather than regional.

(2) Based on EMFAC2021 emission rates for opening year of 2025.

Table 30
Project Annual Operational Energy Demand Summary

Natural Gas Demand	kBTU/year[1]
Unrefrigerated Warehouse - No Rail	5,748,675
Total	5,748,675

Electricity Demand	kWh/year
Unrefrigerated Warehouse - No Rail	1,385,773
Parking Lot	97,533
Total	1,483,306

Notes:

(1) Taken from the CalEEMod 2022.1.1.14 annual output (Appendix B of this report).

6. EMISSIONS REDUCTION MEASURES

CONSTRUCTION MEASURES

Adherence to SCAQMD Rule 403 is required.

No construction mitigation is required.

OPERATIONAL MEASURES

No operational mitigation is required.

7. REFERENCES

California Air Pollution Control Officers Association

2009 Health Risk Assessments for Proposed Land Use Projects

California Air Resources Board

2008 Resolution 08-43

2008 Recommended Approaches for Setting Interim Significance Thresholds for Greenhouse Gases under the California Environmental Quality Act

2008 ARB Recommended Interim Risk Management Policy for Inhalation-Based Residential Cancer Risk – Frequently Asked Questions

2008 Climate Change Scoping Plan, a framework for change.

2011 Supplement to the AB 32 Scoping Plan Functional Equivalent Document

2013 Almanac of Emissions and Air Quality.
Source: https://www.arb.ca.gov/aqd/almanac/almanac13/almanac13.htm

2014 First Update to the Climate Change Scoping Plan, Building on the Framework Pursuant to AB32, the California Global Warming Solutions Act of 2006. May.

2017 California's 2017 Climate Change Scoping Plan. November.

2022 2022 Scoping Plan for Achieving Carbon Neutrality. November 16.

2023 Historical Air Quality, Top 4 Summary

City of Perris

2005 City of Perris General Plan Conservation Element. July 12.

2015 City of Perris General Plan Healthy Community Element. June 9.

2016 City of Perris Climate Action Plan. February 23.

Ganddini Group, Inc.

2022 Redlands Avenue West Industrial Project (DPR 20-000-20) Traffic Impact Analysis. March 8.

2023 Redlands West Industrial Park Trip Generation Comparison. April 7.

Governor's Office of Planning and Research

2008 CEQA and Climate: Addressing Climate Change Through California Environmental Quality Act (CEQA) Review

2018 CEQA Guideline Sections to be Added or Amended

Intergovernmental Panel on Climate Change (IPCC)

2014 IPCC Fifth Assessment Report, Climate Change 2014: Synthesis Report

Office of Environmental Health Hazard Assessment

2015 Air Toxics Hot Spots Program Risk Assessment Guidelines

South Coast Air Quality Management District

1993 CEQA Air Quality Handbook

2003 Health Risk Assessment Guidance for Analyzing Cancer Risks from Mobile Source Diesel Idling Emissions for CEQA Air Quality Analysis

2005 Rule 403 Fugitive Dust

2007 2007 Air Quality Management Plan

2008 Final Localized Significance Threshold Methodology, Revised

2012 Final 2012 Air Quality Management Plan

2016 2016 Air Quality Management Plan

2018 Historical Data by Year. 2013, 2014 and 2015 Air Quality Data Tables.
Source: http://www.aqmd.gov/home/library/air-quality-data-studies/historical-data-by-year

2021 MATES-V Multiple Air Toxics Exposure Study in the South Coast Air Basin. August.

2022 2022 Air Quality Management Plan. December 2.

Southern California Association of Governments

2020 2020-2045 Regional Transportation Plan/Sustainable Communities Strategy

U.S. Environmental Protection Agency (EPA)

2017 Understanding Global Warming Potentials
(Source: https://www.epa.gov/ghgemissions/understanding-global-warming-potentials)

U.S. Geological Survey

2011 Reported Historic Asbestos Mines, Historic Asbestos Prospects, and Other Natural Occurrences of Asbestos in California

APPENDICES

Appendix A Glossary

Appendix B CalEEMod Model Detailed Report & EMFAC Data

Appendix C AERMOD Model Printouts

APPENDIX A

GLOSSARY

AQMP	Air Quality Management Plan
BACT	Best Available Control Technologies
CAAQS	California Ambient Air Quality Standards
CalEPA	California Environmental Protection Agency
CARB	California Air Resources Board
CCAA	California Clean Air Act
CCAR	California Climate Action Registry
CEQA	California Environmental Quality Act
CFCs	Chlorofluorocarbons
CH_4	Methane
CNG	Compressed natural gas
CO	Carbon monoxide
CO_2	Carbon dioxide
CO_2e	Carbon dioxide equivalent
DPM	Diesel particulate matter
EPA	U.S. Environmental Protection Agency
GHG	Greenhouse gas
GWP	Global warming potential
HIDPM	Hazard Index Diesel Particulate Matter
HFCs	Hydrofluorocarbons
IPCC	International Panel on Climate Change
LCFS	Low Carbon Fuel Standard
LST	Localized Significant Thresholds
$MTCO_2e$	Metric tons of carbon dioxide equivalent
$MMTCO_2e$	Million metric tons of carbon dioxide equivalent
MPO	Metropolitan Planning Organization
NAAQS	National Ambient Air Quality Standards
NOx	Nitrogen Oxides
NO_2	Nitrogen dioxide
N_2O	Nitrous oxide
O_3	Ozone
OPR	Governor's Office of Planning and Research
PFCs	Perfluorocarbons
PM	Particle matter
PM10	Particles that are less than 10 micrometers in diameter
PM2.5	Particles that are less than 2.5 micrometers in diameter
PMI	Point of maximum impact
PPM	Parts per million
PPB	Parts per billion
RTIP	Regional Transportation Improvement Plan
RTP	Regional Transportation Plan
SANBAG	San Bernardino Association of Governments
SCAB	South Coast Air Basin
SCAG	Southern California Association of Governments
SCAQMD	South Coast Air Quality Management District
SSAB	Salton Sea Air Basin
SF_6	Sulfur hexafluoride
SIP	State Implementation Plan
SOx	Sulfur Oxides
TAC	Toxic air contaminants
VOC	Volatile organic compounds

APPENDIX B

CALEEMOD MODEL DETAILED REPORT & EMFAC DATA

19370 Redlands Avenue West Industrial Project Detailed Report

Table of Contents

1. Basic Project Information

1.1. Basic Project Information

Data Field	Value
Project Name	19370 Redlands Avenue West Industrial Project
Construction Start Date	7/1/2024
Operational Year	2025
Lead Agency	—
Land Use Scale	Project/site
Analysis Level for Defaults	County
Windspeed (m/s)	2.50
Precipitation (days)	0.20
Location	33.8276700581593, -117.21951890172647
County	Riverside-South Coast
City	Perris
Air District	South Coast AQMD
Air Basin	South Coast
TAZ	5501
EDFZ	11
Electric Utility	Southern California Edison
Gas Utility	Southern California Gas
App Version	2022.1.1.14

1.2. Land Use Types

Land Use Subtype	Size	Unit	Lot Acreage	Building Area (sq ft)	Landscape Area (sq ft)	Special Landscape Area (sq ft)	Population	Description

Unrefrigerated Warehouse-No Rail	301	1000sqft	6.82	301,101	148,396	—	—	—
Parking Lot	284	Space	2.56	0.00	0.00	—	—	—
Other Asphalt Surfaces	7.35	Acre	7.35	0.00	0.00	—	—	—

1.3. User-Selected Emission Reduction Measures by Emissions Sector

No measures selected

2. Emissions Summary

2.1. Construction Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	4.44	50.8	38.2	32.8	0.08	1.51	4.72	6.23	1.40	1.73	3.13	—	10,229	10,229	0.34	0.60	11.5	10,425
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	3.17	53.0	21.3	29.3	0.05	0.83	2.08	2.91	0.77	0.50	1.27	—	7,188	7,188	0.27	0.33	0.30	7,292
Average Daily (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	1.33	5.34	9.59	11.8	0.02	0.38	1.00	1.38	0.35	0.29	0.64	—	2,975	2,975	0.11	0.14	1.74	3,022
Annual (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	0.24	0.97	1.75	2.15	< 0.005	0.07	0.18	0.25	0.06	0.05	0.12	—	493	493	0.02	0.02	0.29	500

2.2. Construction Emissions by Year, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Year	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily - Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2024	4.44	50.8	38.2	32.8	0.08	1.51	4.72	6.23	1.40	1.73	3.13	—	10,229	10,229	0.34	0.60	11.5	10,425
Daily - Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2024	3.17	53.0	21.3	29.3	0.05	0.83	2.08	2.91	0.77	0.50	1.27	—	7,188	7,188	0.27	0.33	0.30	7,292
2025	2.95	2.47	19.8	28.6	0.05	0.73	2.08	2.81	0.68	0.50	1.18	—	7,132	7,132	0.27	0.32	0.28	7,235
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2024	1.33	5.34	9.59	11.8	0.02	0.38	1.00	1.38	0.35	0.29	0.64	—	2,975	2,975	0.11	0.14	1.74	3,022
2025	0.38	0.32	2.57	3.74	0.01	0.09	0.27	0.36	0.09	0.07	0.15	—	924	924	0.04	0.04	0.60	938
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2024	0.24	0.97	1.75	2.15	< 0.005	0.07	0.18	0.25	0.06	0.05	0.12	—	493	493	0.02	0.02	0.29	500
2025	0.07	0.06	0.47	0.68	< 0.005	0.02	0.05	0.07	0.02	0.01	0.03	—	153	153	0.01	0.01	0.10	155

2.4. Operations Emissions Compared Against Thresholds

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Un/Mit.	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	5.61	12.2	9.94	57.4	0.15	0.32	10.0	10.3	0.31	2.55	2.85	286	18,922	19,208	29.6	1.29	46.9	20,381
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	3.18	9.94	10.3	36.4	0.14	0.30	10.0	10.3	0.29	2.55	2.84	286	18,182	18,468	29.6	1.31	1.22	19,599

Average Daily (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	4.73	11.4	10.2	46.2	0.14	0.30	10.0	10.3	0.29	2.55	2.83	286	18,252	18,538	29.6	1.31	20.3	19,690
Annual (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unmit.	0.86	2.07	1.85	8.44	0.03	0.05	1.83	1.88	0.05	0.46	0.52	47.3	3,022	3,069	4.90	0.22	3.35	3,260

2.5. Operations Emissions by Sector, Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Sector	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	2.94	2.53	7.09	41.4	0.13	0.12	10.0	10.1	0.11	2.55	2.66	—	13,910	13,910	0.34	0.94	46.9	14,245
Area	2.33	9.42	0.11	13.1	< 0.005	0.02	—	0.02	0.02	—	0.02	—	53.9	53.9	< 0.005	< 0.005	—	54.0
Energy	0.17	0.08	1.54	1.30	0.01	0.12	—	0.12	0.12	—	0.12	—	4,004	4,004	0.30	0.02	—	4,018
Water	—	—	—	—	—	—	—	—	—	—	—	133	709	842	13.7	0.33	—	1,284
Waste	—	—	—	—	—	—	—	—	—	—	—	153	0.00	153	15.2	0.00	—	534
Off-Road	0.14	0.12	1.11	1.56	< 0.005	0.06	—	0.06	0.05	—	0.05	—	229	229	0.01	< 0.005	—	229
Stationary	0.04	0.03	0.09	0.08	< 0.005	< 0.005	0.00	< 0.005	< 0.005	0.00	< 0.005	0.00	16.6	16.6	< 0.005	< 0.005	0.00	16.7
Total	5.61	12.2	9.94	57.4	0.15	0.32	10.0	10.3	0.31	2.55	2.85	286	18,922	19,208	29.6	1.29	46.9	20,381
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	2.84	2.43	7.54	33.4	0.13	0.12	10.0	10.1	0.11	2.55	2.66	—	13,224	13,224	0.35	0.95	1.22	13,518
Area	—	7.28	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Energy	0.17	0.08	1.54	1.30	0.01	0.12	—	0.12	0.12	—	0.12	—	4,004	4,004	0.30	0.02	—	4,018
Water	—	—	—	—	—	—	—	—	—	—	—	133	709	842	13.7	0.33	—	1,284

Waste	—	—	—	—	—	—	—	—	—	—	—	153	0.00	153	15.2	0.00	—	534
Off-Road	0.14	0.12	1.11	1.56	< 0.005	0.06	—	0.06	0.05	—	0.05	—	229	229	0.01	< 0.005	—	229
Stationary	0.04	0.03	0.09	0.08	< 0.005	< 0.005	0.00	< 0.005	< 0.005	0.00	< 0.005	0.00	16.6	16.6	< 0.005	< 0.005	0.00	16.7
Total	3.18	9.94	10.3	36.4	0.14	0.30	10.0	10.3	0.29	2.55	2.84	286	18,182	18,468	29.6	1.31	1.22	19,599
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	2.83	2.42	7.66	34.8	0.13	0.12	10.0	10.1	0.11	2.55	2.66	—	13,322	13,322	0.35	0.96	20.3	13,637
Area	1.59	8.75	0.08	8.97	< 0.005	0.02	—	0.02	0.01	—	0.01	—	36.9	36.9	< 0.005	< 0.005	—	37.0
Energy	0.17	0.08	1.54	1.30	0.01	0.12	—	0.12	0.12	—	0.12	—	4,004	4,004	0.30	0.02	—	4,018
Water	—	—	—	—	—	—	—	—	—	—	—	133	709	842	13.7	0.33	—	1,284
Waste	—	—	—	—	—	—	—	—	—	—	—	153	0.00	153	15.2	0.00	—	534
Off-Road	0.10	0.08	0.79	1.11	< 0.005	0.04	—	0.04	0.04	—	0.04	—	163	163	0.01	< 0.005	—	163
Stationary	0.04	0.03	0.09	0.08	< 0.005	< 0.005	0.00	< 0.005	< 0.005	0.00	< 0.005	0.00	16.6	16.6	< 0.005	< 0.005	0.00	16.6
Total	4.73	11.4	10.2	46.2	0.14	0.30	10.0	10.3	0.29	2.55	2.83	286	18,252	18,538	29.6	1.31	20.3	19,690
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Mobile	0.52	0.44	1.40	6.35	0.02	0.02	1.83	1.85	0.02	0.46	0.49	—	2,206	2,206	0.06	0.16	3.35	2,258
Area	0.29	1.60	0.01	1.64	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	6.11	6.11	< 0.005	< 0.005	—	6.13
Energy	0.03	0.02	0.28	0.24	< 0.005	0.02	—	0.02	0.02	—	0.02	—	663	663	0.05	< 0.005	—	665
Water	—	—	—	—	—	—	—	—	—	—	—	22.1	117	139	2.27	0.05	—	213
Waste	—	—	—	—	—	—	—	—	—	—	—	25.3	0.00	25.3	2.52	0.00	—	88.4
Off-Road	0.02	0.02	0.14	0.20	< 0.005	0.01	—	0.01	0.01	—	0.01	—	27.0	27.0	< 0.005	< 0.005	—	27.1
Stationary	0.01	0.01	0.02	0.02	< 0.005	< 0.005	0.00	< 0.005	< 0.005	0.00	< 0.005	0.00	2.74	2.74	< 0.005	< 0.005	0.00	2.75
Total	0.86	2.07	1.85	8.44	0.03	0.05	1.83	1.88	0.05	0.46	0.52	47.3	3,022	3,069	4.90	0.22	3.35	3,260

3. Construction Emissions Details

3.1. Grading (2024) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	4.19	3.52	34.3	30.2	0.06	1.45	—	1.45	1.33	—	1.33	—	6,598	6,598	0.27	0.05	—	6,621
Dust From Material Movement	—	—	—	—	—	—	3.60	3.60	—	1.43	1.43	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.34	0.29	2.82	2.48	0.01	0.12	—	0.12	0.11	—	0.11	—	542	542	0.02	< 0.005	—	544
Dust From Material Movement	—	—	—	—	—	—	0.30	0.30	—	0.12	0.12	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.06	0.05	0.51	0.45	< 0.005	0.02	—	0.02	0.02	—	0.02	—	89.8	89.8	< 0.005	< 0.005	—	90.1

Dust From Material Movement	—	—	—	—	—	—	0.05	0.05	—	0.02	0.02	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.11	0.10	0.10	1.67	0.00	0.00	0.26	0.26	0.00	0.06	0.06	—	288	288	0.01	0.01	1.14	292
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.14	0.05	3.78	0.91	0.02	0.06	0.86	0.93	0.06	0.24	0.31	—	3,343	3,343	0.06	0.54	7.07	3,512
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.11	0.00	0.00	0.02	0.02	0.00	0.01	0.01	—	22.0	22.0	< 0.005	< 0.005	0.04	22.3
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.01	< 0.005	0.33	0.08	< 0.005	0.01	0.07	0.08	0.01	0.02	0.03	—	275	275	0.01	0.04	0.25	288
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.02	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	3.65	3.65	< 0.005	< 0.005	0.01	3.70
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	< 0.005	< 0.005	0.06	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	45.5	45.5	< 0.005	0.01	0.04	47.7

3.3. Building Construction (2024) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.43	2.03	18.7	20.8	0.04	0.81	—	0.81	0.75	—	0.75	—	3,982	3,982	0.16	0.03	—	3,996
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.43	2.03	18.7	20.8	0.04	0.81	—	0.81	0.75	—	0.75	—	3,982	3,982	0.16	0.03	—	3,996
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.67	0.56	5.21	5.78	0.01	0.23	—	0.23	0.21	—	0.21	—	1,107	1,107	0.04	0.01	—	1,110
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.12	0.10	0.95	1.05	< 0.005	0.04	—	0.04	0.04	—	0.04	—	183	183	0.01	< 0.005	—	184
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.71	0.65	0.61	10.6	0.00	0.00	1.65	1.65	0.00	0.39	0.39	—	1,820	1,820	0.08	0.06	7.22	1,848
Vendor	0.07	0.05	1.74	0.54	0.01	0.02	0.42	0.44	0.02	0.12	0.14	—	1,532	1,532	0.03	0.23	4.32	1,606
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.67	0.61	0.72	7.98	0.00	0.00	1.65	1.65	0.00	0.39	0.39	—	1,673	1,673	0.08	0.06	0.19	1,694
Vendor	0.07	0.04	1.82	0.55	0.01	0.02	0.42	0.44	0.02	0.12	0.14	—	1,533	1,533	0.03	0.23	0.11	1,603
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.19	0.17	0.20	2.34	0.00	0.00	0.46	0.46	0.00	0.11	0.11	—	471	471	0.02	0.02	0.87	477
Vendor	0.02	0.01	0.50	0.15	< 0.005	0.01	0.12	0.12	0.01	0.03	0.04	—	426	426	0.01	0.06	0.52	446
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.03	0.03	0.04	0.43	0.00	0.00	0.08	0.08	0.00	0.02	0.02	—	77.9	77.9	< 0.005	< 0.005	0.14	79.0
Vendor	< 0.005	< 0.005	0.09	0.03	< 0.005	< 0.005	0.02	0.02	< 0.005	0.01	0.01	—	70.5	70.5	< 0.005	0.01	0.09	73.8
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.5. Building Construction (2025) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	2.28	1.91	17.5	20.7	0.04	0.71	—	0.71	0.65	—	0.65	—	3,982	3,982	0.16	0.03	—	3,996
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.30	0.25	2.26	2.67	0.01	0.09	—	0.09	0.08	—	0.08	—	514	514	0.02	< 0.005	—	516
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.05	0.05	0.41	0.49	< 0.005	0.02	—	0.02	0.02	—	0.02	—	85.2	85.2	< 0.005	< 0.005	—	85.4
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.60	0.53	0.61	7.38	0.00	0.00	1.65	1.65	0.00	0.39	0.39	—	1,638	1,638	0.08	0.06	0.17	1,659
Vendor	0.07	0.03	1.74	0.53	0.01	0.02	0.42	0.44	0.02	0.12	0.14	—	1,511	1,511	0.03	0.23	0.11	1,580
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.08	0.07	0.09	1.01	0.00	0.00	0.21	0.21	0.00	0.05	0.05	—	214	214	0.01	0.01	0.36	217
Vendor	0.01	< 0.005	0.22	0.07	< 0.005	< 0.005	0.05	0.06	< 0.005	0.02	0.02	—	195	195	< 0.005	0.03	0.24	204
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.02	0.18	0.00	0.00	0.04	0.04	0.00	0.01	0.01	—	35.5	35.5	< 0.005	< 0.005	0.06	36.0
Vendor	< 0.005	< 0.005	0.04	0.01	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	< 0.005	—	32.3	32.3	< 0.005	< 0.005	0.04	33.8
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.7. Paving (2024) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	1.01	0.85	7.81	10.0	0.01	0.39	—	0.39	0.36	—	0.36	—	1,512	1,512	0.06	0.01	—	1,517
Paving	—	1.30	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.06	0.05	0.43	0.55	< 0.005	0.02	—	0.02	0.02	—	0.02	—	82.8	82.8	< 0.005	< 0.005	—	83.1
Paving	—	0.07	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.08	0.10	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	13.7	13.7	< 0.005	< 0.005	—	13.8
Paving	—	0.01	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.08	0.07	0.09	0.95	0.00	0.00	0.20	0.20	0.00	0.05	0.05	—	198	198	0.01	0.01	0.02	201
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.05	0.00	0.00	0.01	0.01	0.00	< 0.005	< 0.005	—	11.0	11.0	< 0.005	< 0.005	0.02	11.2
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.01	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	1.82	1.82	< 0.005	< 0.005	< 0.005	1.85
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

3.9. Architectural Coating (2024) - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Location	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Onsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.17	0.14	0.91	1.15	< 0.005	0.03	—	0.03	0.03	—	0.03	—	134	134	0.01	< 0.005	—	134
Architectural Coatings	—	50.5	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.17	0.14	0.91	1.15	< 0.005	0.03	—	0.03	0.03	—	0.03	—	134	134	0.01	< 0.005	—	134
Architectural Coatings	—	50.5	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	0.01	0.01	0.07	0.09	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	11.0	11.0	< 0.005	< 0.005	—	11.0
Architectural Coatings	—	4.15	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Off-Road Equipment	< 0.005	< 0.005	0.01	0.02	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	1.82	1.82	< 0.005	< 0.005	—	1.82
Architectural Coatings	—	0.76	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Onsite truck	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Offsite	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.14	0.13	0.12	2.11	0.00	0.00	0.33	0.33	0.00	0.08	0.08	—	364	364	0.02	0.01	1.44	370
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.13	0.12	0.14	1.60	0.00	0.00	0.33	0.33	0.00	0.08	0.08	—	335	335	0.02	0.01	0.04	339
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Average Daily	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	0.01	0.01	0.01	0.14	0.00	0.00	0.03	0.03	0.00	0.01	0.01	—	27.8	27.8	< 0.005	< 0.005	0.05	28.2
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Worker	< 0.005	< 0.005	< 0.005	0.03	0.00	0.00	< 0.005	< 0.005	0.00	< 0.005	< 0.005	—	4.61	4.61	< 0.005	< 0.005	0.01	4.68
Vendor	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Hauling	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

4. Operations Emissions Details

4.1. Mobile Emissions by Land Use

4.1.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Unrefrigerated Warehouse-No Rail	2.94	2.53	7.09	41.4	0.13	0.12	10.0	10.1	0.11	2.55	2.66	—	13,910	13,910	0.34	0.94	46.9	14,245
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Total	2.94	2.53	7.09	41.4	0.13	0.12	10.0	10.1	0.11	2.55	2.66	—	13,910	13,910	0.34	0.94	46.9	14,245
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	2.84	2.43	7.54	33.4	0.13	0.12	10.0	10.1	0.11	2.55	2.66	—	13,224	13,224	0.35	0.95	1.22	13,518
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Total	2.84	2.43	7.54	33.4	0.13	0.12	10.0	10.1	0.11	2.55	2.66	—	13,224	13,224	0.35	0.95	1.22	13,518
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	0.52	0.44	1.40	6.35	0.02	0.02	1.83	1.85	0.02	0.46	0.49	—	2,206	2,206	0.06	0.16	3.35	2,258
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	0.00	0.00	0.00	0.00

Total	0.52	0.44	1.40	6.35	0.02	0.02	1.83	1.85	0.02	0.46	0.49	—	2,206	2,206	0.06	0.16	3.35	2,258

4.2. Energy

4.2.1. Electricity Emissions By Land Use - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	2,020	2,020	0.13	0.02	—	2,027
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	142	142	0.01	< 0.005	—	143
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	2,162	2,162	0.13	0.02	—	2,170
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	2,020	2,020	0.13	0.02	—	2,027
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	142	142	0.01	< 0.005	—	143
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00

Total	—	—	—	—	—	—	—	—	—	—	—	—	2,162	2,162	0.13	0.02	—	2,170
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	—	334	334	0.02	< 0.005	—	336
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	—	23.5	23.5	< 0.005	< 0.005	—	23.6
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	—	358	358	0.02	< 0.005	—	359

4.2.3. Natural Gas Emissions By Land Use - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	0.17	0.08	1.54	1.30	0.01	0.12	—	0.12	0.12	—	0.12	—	1,842	1,842	0.16	< 0.005	—	1,847
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.17	0.08	1.54	1.30	0.01	0.12	—	0.12	0.12	—	0.12	—	1,842	1,842	0.16	< 0.005	—	1,847

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	0.17	0.08	1.54	1.30	0.01	0.12	—	0.12	0.12	—	0.12	—	1,842	1,842	0.16	< 0.005	—	1,847
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.17	0.08	1.54	1.30	0.01	0.12	—	0.12	0.12	—	0.12	—	1,842	1,842	0.16	< 0.005	—	1,847
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	0.03	0.02	0.28	0.24	< 0.005	0.02	—	0.02	0.02	—	0.02	—	305	305	0.03	< 0.005	—	306
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	—	0.00	0.00	—	0.00	—	0.00	0.00	0.00	0.00	—	0.00
Total	0.03	0.02	0.28	0.24	< 0.005	0.02	—	0.02	0.02	—	0.02	—	305	305	0.03	< 0.005	—	306

4.3. Area Emissions by Source

4.3.2. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Source	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	6.48	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.80	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Landscape Equipment	2.33	2.15	0.11	13.1	< 0.005	0.02	—	0.02	0.02	—	0.02	—	53.9	53.9	< 0.005	< 0.005	—	54.0
Total	2.33	9.42	0.11	13.1	< 0.005	0.02	—	0.02	0.02	—	0.02	—	53.9	53.9	< 0.005	< 0.005	—	54.0
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	6.48	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.80	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	7.28	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Consumer Products	—	1.18	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Architectural Coatings	—	0.15	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Landscape Equipment	0.29	0.27	0.01	1.64	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	6.11	6.11	< 0.005	< 0.005	—	6.13
Total	0.29	1.60	0.01	1.64	< 0.005	< 0.005	—	< 0.005	< 0.005	—	< 0.005	—	6.11	6.11	< 0.005	< 0.005	—	6.13

4.4. Water Emissions by Land Use

4.4.2. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	133	709	842	13.7	0.33	—	1,284
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	133	709	842	13.7	0.33	—	1,284
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	133	709	842	13.7	0.33	—	1,284
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	133	709	842	13.7	0.33	—	1,284

Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	22.1	117	139	2.27	0.05	—	213
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	22.1	117	139	2.27	0.05	—	213

4.5. Waste Emissions by Land Use

4.5.2. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	153	0.00	153	15.2	0.00	—	534
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	153	0.00	153	15.2	0.00	—	534

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	153	0.00	153	15.2	0.00	—	534
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	153	0.00	153	15.2	0.00	—	534
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Unrefrigerated Warehouse-No Rail	—	—	—	—	—	—	—	—	—	—	—	25.3	0.00	25.3	2.52	0.00	—	88.4
Parking Lot	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Other Asphalt Surfaces	—	—	—	—	—	—	—	—	—	—	—	0.00	0.00	0.00	0.00	0.00	—	0.00
Total	—	—	—	—	—	—	—	—	—	—	—	25.3	0.00	25.3	2.52	0.00	—	88.4

4.6. Refrigerant Emissions by Land Use

4.6.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e

Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.7. Offroad Emissions By Equipment Type

4.7.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Forklifts	0.14	0.12	1.11	1.56	< 0.005	0.06	—	0.06	0.05	—	0.05	—	229	229	0.01	< 0.005	—	229
Total	0.14	0.12	1.11	1.56	< 0.005	0.06	—	0.06	0.05	—	0.05	—	229	229	0.01	< 0.005	—	229
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Forklifts	0.14	0.12	1.11	1.56	< 0.005	0.06	—	0.06	0.05	—	0.05	—	229	229	0.01	< 0.005	—	229
Total	0.14	0.12	1.11	1.56	< 0.005	0.06	—	0.06	0.05	—	0.05	—	229	229	0.01	< 0.005	—	229
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Forklifts	0.02	0.02	0.14	0.20	< 0.005	0.01	—	0.01	0.01	—	0.01	—	27.0	27.0	< 0.005	< 0.005	—	27.1
Total	0.02	0.02	0.14	0.20	< 0.005	0.01	—	0.01	0.01	—	0.01	—	27.0	27.0	< 0.005	< 0.005	—	27.1

4.8. Stationary Emissions By Equipment Type

4.8.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Emergency Generator	0.02	0.02	0.06	0.06	< 0.005	< 0.005	0.00	< 0.005	< 0.005	0.00	< 0.005	0.00	11.1	11.1	< 0.005	< 0.005	0.00	11.1
Fire Pump	0.01	0.01	0.03	0.03	< 0.005	< 0.005	0.00	< 0.005	< 0.005	0.00	< 0.005	0.00	5.54	5.54	< 0.005	< 0.005	0.00	5.56
Total	0.04	0.03	0.09	0.08	< 0.005	< 0.005	0.00	< 0.005	< 0.005	0.00	< 0.005	0.00	16.6	16.6	< 0.005	< 0.005	0.00	16.7
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Emergency Generator	0.02	0.02	0.06	0.06	< 0.005	< 0.005	0.00	< 0.005	< 0.005	0.00	< 0.005	0.00	11.1	11.1	< 0.005	< 0.005	0.00	11.1
Fire Pump	0.01	0.01	0.03	0.03	< 0.005	< 0.005	0.00	< 0.005	< 0.005	0.00	< 0.005	0.00	5.54	5.54	< 0.005	< 0.005	0.00	5.56
Total	0.04	0.03	0.09	0.08	< 0.005	< 0.005	0.00	< 0.005	< 0.005	0.00	< 0.005	0.00	16.6	16.6	< 0.005	< 0.005	0.00	16.7
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Emergency Generator	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	0.00	< 0.005	< 0.005	0.00	< 0.005	0.00	1.83	1.83	< 0.005	< 0.005	0.00	1.83
Fire Pump	< 0.005	< 0.005	0.01	0.01	< 0.005	< 0.005	0.00	< 0.005	< 0.005	0.00	< 0.005	0.00	0.91	0.91	< 0.005	< 0.005	0.00	0.92

Total	0.01	0.01	0.02	0.02	< 0.005	< 0.005	0.00	< 0.005	< 0.005	0.00	< 0.005	0.00	2.74	2.74	< 0.005	< 0.005	0.00	2.75

4.9. User Defined Emissions By Equipment Type

4.9.1. Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Equipment Type	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10. Soil Carbon Accumulation By Vegetation Type

4.10.1. Soil Carbon Accumulation By Vegetation Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Vegetation	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.2. Above and Belowground Carbon Accumulation by Land Use Type - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Land Use	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Total	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

4.10.3. Avoided and Sequestered Emissions by Species - Unmitigated

Criteria Pollutants (lb/day for daily, ton/yr for annual) and GHGs (lb/day for daily, MT/yr for annual)

Species	TOG	ROG	NOx	CO	SO2	PM10E	PM10D	PM10T	PM2.5E	PM2.5D	PM2.5T	BCO2	NBCO2	CO2T	CH4	N2O	R	CO2e
Daily, Summer (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Sequest	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Daily, Winter (Max)	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Annual	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Avoided	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Sequestered	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Removed	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Subtotal	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

5. Activity Data

5.1. Construction Schedule

Phase Name	Phase Type	Start Date	End Date	Days Per Week	Work Days per Phase	Phase Description
Grading	Grading	7/1/2024	8/11/2024	5.00	30.0	—
Building Construction	Building Construction	8/12/2024	3/7/2025	5.00	150	—
Paving	Paving	3/1/2024	3/28/2024	5.00	20.0	—
Architectural Coating	Architectural Coating	2/20/2024	4/1/2024	5.00	30.0	—

5.2. Off-Road Equipment

5.2.1. Unmitigated

Phase Name	Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
Grading	Graders	Diesel	Average	1.00	8.00	148	0.41
Grading	Excavators	Diesel	Average	2.00	8.00	36.0	0.38
Grading	Tractors/Loaders/Backhoes	Diesel	Average	2.00	8.00	84.0	0.37
Grading	Scrapers	Diesel	Average	2.00	8.00	423	0.48
Grading	Rubber Tired Dozers	Diesel	Average	1.00	8.00	367	0.40
Building Construction	Forklifts	Diesel	Average	4.00	8.00	82.0	0.20
Building Construction	Generator Sets	Diesel	Average	2.00	8.00	14.0	0.74
Building Construction	Cranes	Diesel	Average	2.00	7.00	367	0.29
Building Construction	Welders	Diesel	Average	2.00	8.00	46.0	0.45
Building Construction	Tractors/Loaders/Backhoes	Diesel	Average	4.00	7.00	84.0	0.37
Paving	Pavers	Diesel	Average	2.00	8.00	81.0	0.42
Paving	Paving Equipment	Diesel	Average	2.00	8.00	89.0	0.36

Paving	Rollers	Diesel	Average	2.00	8.00	36.0	0.38
Architectural Coating	Air Compressors	Diesel	Average	1.00	6.00	37.0	0.48

5.3. Construction Vehicles

5.3.1. Unmitigated

Phase Name	Trip Type	One-Way Trips per Day	Miles per Trip	Vehicle Mix
Grading	—	—	—	—
Grading	Worker	20.0	18.5	LDA,LDT1,LDT2
Grading	Vendor	—	10.2	HHDT,MHDT
Grading	Hauling	47.7	20.0	HHDT
Grading	Onsite truck	—	—	HHDT
Building Construction	—	—	—	—
Building Construction	Worker	126	18.5	LDA,LDT1,LDT2
Building Construction	Vendor	49.4	10.2	HHDT,MHDT
Building Construction	Hauling	0.00	20.0	HHDT
Building Construction	Onsite truck	—	—	HHDT
Paving	—	—	—	—
Paving	Worker	15.0	18.5	LDA,LDT1,LDT2
Paving	Vendor	—	10.2	HHDT,MHDT
Paving	Hauling	0.00	20.0	HHDT
Paving	Onsite truck	—	—	HHDT
Architectural Coating	—	—	—	—
Architectural Coating	Worker	25.3	18.5	LDA,LDT1,LDT2
Architectural Coating	Vendor	—	10.2	HHDT,MHDT
Architectural Coating	Hauling	0.00	20.0	HHDT
Architectural Coating	Onsite truck	—	—	HHDT

5.4. Vehicles

5.4.1. Construction Vehicle Control Strategies

Control Strategies Applied	PM10 Reduction	PM2.5 Reduction
Water unpaved roads twice daily	55%	55%
Limit vehicle speeds on unpaved roads to 25 mph	44%	44%

5.5. Architectural Coatings

Phase Name	Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
Architectural Coating	0.00	0.00	451,652	150,551	25,890

5.6. Dust Mitigation

5.6.1. Construction Earthmoving Activities

Phase Name	Material Imported (Cubic Yards)	Material Exported (Cubic Yards)	Acres Graded (acres)	Material Demolished (sq. ft.)	Acres Paved (acres)
Grading	—	11,450	90.0	0.00	—
Paving	0.00	0.00	0.00	0.00	9.91

5.6.2. Construction Earthmoving Control Strategies

Control Strategies Applied	Frequency (per day)	PM10 Reduction	PM2.5 Reduction
Water Exposed Area	2	61%	61%

5.7. Construction Paving

Land Use	Area Paved (acres)	% Asphalt
Unrefrigerated Warehouse-No Rail	0.00	0%

Parking Lot	2.56	100%
Other Asphalt Surfaces	7.35	100%

5.8. Construction Electricity Consumption and Emissions Factors

kWh per Year and Emission Factor (lb/MWh)

Year	kWh per Year	CO2	CH4	N2O
2024	0.00	532	0.03	< 0.005
2025	0.00	532	0.03	< 0.005

5.9. Operational Mobile Sources

5.9.1. Unmitigated

Land Use Type	Trips/Weekday	Trips/Saturday	Trips/Sunday	Trips/Year	VMT/Weekday	VMT/Saturday	VMT/Sunday	VMT/Year
Unrefrigerated Warehouse-No Rail	545	545	545	198,922	13,928	13,928	13,928	5,083,670
Parking Lot	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other Asphalt Surfaces	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

5.10. Operational Area Sources

5.10.1. Hearths

5.10.1.1. Unmitigated

5.10.2. Architectural Coatings

Residential Interior Area Coated (sq ft)	Residential Exterior Area Coated (sq ft)	Non-Residential Interior Area Coated (sq ft)	Non-Residential Exterior Area Coated (sq ft)	Parking Area Coated (sq ft)
0	0.00	451,652	150,551	25,890

5.10.3. Landscape Equipment

Season	Unit	Value
Snow Days	day/yr	0.00
Summer Days	day/yr	250

5.11. Operational Energy Consumption

5.11.1. Unmitigated

Electricity (kWh/yr) and CO2 and CH4 and N2O and Natural Gas (kBTU/yr)

Land Use	Electricity (kWh/yr)	CO2	CH4	N2O	Natural Gas (kBTU/yr)
Unrefrigerated Warehouse-No Rail	1,385,773	532	0.0330	0.0040	5,748,675
Parking Lot	97,533	532	0.0330	0.0040	0.00
Other Asphalt Surfaces	0.00	532	0.0330	0.0040	0.00

5.12. Operational Water and Wastewater Consumption

5.12.1. Unmitigated

Land Use	Indoor Water (gal/year)	Outdoor Water (gal/year)
Unrefrigerated Warehouse-No Rail	69,629,606	2,352,924
Parking Lot	0.00	0.00
Other Asphalt Surfaces	0.00	0.00

5.13. Operational Waste Generation

5.13.1. Unmitigated

Land Use	Waste (ton/year)	Cogeneration (kWh/year)

Unrefrigerated Warehouse-No Rail	283	—
Parking Lot	0.00	—
Other Asphalt Surfaces	0.00	—

5.14. Operational Refrigeration and Air Conditioning Equipment

5.14.1. Unmitigated

Land Use Type	Equipment Type	Refrigerant	GWP	Quantity (kg)	Operations Leak Rate	Service Leak Rate	Times Serviced

5.15. Operational Off-Road Equipment

5.15.1. Unmitigated

Equipment Type	Fuel Type	Engine Tier	Number per Day	Hours Per Day	Horsepower	Load Factor
Forklifts	Diesel	Average	2.00	6.00	82.0	0.20

5.16. Stationary Sources

5.16.1. Emergency Generators and Fire Pumps

Equipment Type	Fuel Type	Number per Day	Hours per Day	Hours per Year	Horsepower	Load Factor
Emergency Generator	Diesel	1.00	0.03	12.0	400	0.73
Fire Pump	Diesel	1.00	0.03	12.0	200	0.73

5.16.2. Process Boilers

Equipment Type	Fuel Type	Number	Boiler Rating (MMBtu/hr)	Daily Heat Input (MMBtu/day)	Annual Heat Input (MMBtu/yr)

5.17. User Defined

Equipment Type	Fuel Type
—	—

5.18. Vegetation

5.18.1. Land Use Change

5.18.1.1. Unmitigated

Vegetation Land Use Type	Vegetation Soil Type	Initial Acres	Final Acres

5.18.1. Biomass Cover Type

5.18.1.1. Unmitigated

Biomass Cover Type	Initial Acres	Final Acres

5.18.2. Sequestration

5.18.2.1. Unmitigated

Tree Type	Number	Electricity Saved (kWh/year)	Natural Gas Saved (btu/year)

6. Climate Risk Detailed Report

6.1. Climate Risk Summary

Cal-Adapt midcentury 2040–2059 average projections for four hazards are reported below for your project location. These are under Representation Concentration Pathway (RCP) 8.5 which assumes GHG emissions will continue to rise strongly through 2050 and then plateau around 2100.

Climate Hazard	Result for Project Location	Unit
Temperature and Extreme Heat	29.1	annual days of extreme heat
Extreme Precipitation	1.95	annual days with precipitation above 20 mm

Sea Level Rise	0.00	meters of inundation depth
Wildfire	6.36	annual hectares burned

Temperature and Extreme Heat data are for grid cell in which your project are located. The projection is based on the 98th historical percentile of daily maximum/minimum temperatures from observed historical data (32 climate model ensemble from Cal-Adapt, 2040–2059 average under RCP 8.5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.
Extreme Precipitation data are for the grid cell in which your project are located. The threshold of 20 mm is equivalent to about ¾ an inch of rain, which would be light to moderate rainfall if received over a full day or heavy rain if received over a period of 2 to 4 hours. Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.
Sea Level Rise data are for the grid cell in which your project are located. The projections are from Radke et al. (2017), as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider different increments of sea level rise coupled with extreme storm events. Users may select from four model simulations to view the range in potential inundation depth for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 50 meters (m) by 50 m, or about 164 feet (ft) by 164 ft.
Wildfire data are for the grid cell in which your project are located. The projections are from UC Davis, as reported in Cal-Adapt (2040–2059 average under RCP 8.5), and consider historical data of climate, vegetation, population density, and large (> 400 ha) fire history. Users may select from four model simulations to view the range in potential wildfire probabilities for the grid cell. The four simulations make different assumptions about expected rainfall and temperature are: Warmer/drier (HadGEM2-ES), Cooler/wetter (CNRM-CM5), Average conditions (CanESM2), Range of different rainfall and temperature possibilities (MIROC5). Each grid cell is 6 kilometers (km) by 6 km, or 3.7 miles (mi) by 3.7 mi.

6.2. Initial Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score
Temperature and Extreme Heat	4	0	0	N/A
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	1	0	0	N/A
Wildfire	1	0	0	N/A
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	0	0	0	N/A

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.
The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.
The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores do not include implementation of climate risk reduction measures.

6.3. Adjusted Climate Risk Scores

Climate Hazard	Exposure Score	Sensitivity Score	Adaptive Capacity Score	Vulnerability Score

Temperature and Extreme Heat	4	1	1	4
Extreme Precipitation	N/A	N/A	N/A	N/A
Sea Level Rise	1	1	1	2
Wildfire	1	1	1	2
Flooding	N/A	N/A	N/A	N/A
Drought	N/A	N/A	N/A	N/A
Snowpack Reduction	N/A	N/A	N/A	N/A
Air Quality Degradation	1	1	1	2

The sensitivity score reflects the extent to which a project would be adversely affected by exposure to a climate hazard. Exposure is rated on a scale of 1 to 5, with a score of 5 representing the greatest exposure.
The adaptive capacity of a project refers to its ability to manage and reduce vulnerabilities from projected climate hazards. Adaptive capacity is rated on a scale of 1 to 5, with a score of 5 representing the greatest ability to adapt.
The overall vulnerability scores are calculated based on the potential impacts and adaptive capacity assessments for each hazard. Scores include implementation of climate risk reduction measures.

6.4. Climate Risk Reduction Measures

7. Health and Equity Details

7.1. CalEnviroScreen 4.0 Scores

The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Exposure Indicators	—
AQ-Ozone	97.0
AQ-PM	53.3
AQ-DPM	13.7
Drinking Water	10.2
Lead Risk Housing	33.4
Pesticides	35.2
Toxic Releases	36.2

Traffic	42.2
Effect Indicators	—
CleanUp Sites	0.00
Groundwater	0.00
Haz Waste Facilities/Generators	26.7
Impaired Water Bodies	0.00
Solid Waste	0.00
Sensitive Population	—
Asthma	65.8
Cardio-vascular	91.1
Low Birth Weights	41.5
Socioeconomic Factor Indicators	—
Education	92.2
Housing	75.3
Linguistic	61.1
Poverty	90.2
Unemployment	78.3

7.2. Healthy Places Index Scores

The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

Indicator	Result for Project Census Tract
Economic	—
Above Poverty	11.61298601
Employed	7.173104068
Median HI	34.63364558
Education	—
Bachelor's or higher	3.605800077

High school enrollment	14.38470422
Preschool enrollment	20.05646093
Transportation	—
Auto Access	81.29090209
Active commuting	17.74669575
Social	—
2-parent households	21.22417554
Voting	4.144745284
Neighborhood	—
Alcohol availability	63.15924548
Park access	81.35506224
Retail density	48.73604517
Supermarket access	65.55883485
Tree canopy	1.770819967
Housing	—
Homeownership	67.59912742
Housing habitability	18.02900038
Low-inc homeowner severe housing cost burden	11.06120878
Low-inc renter severe housing cost burden	3.37482356
Uncrowded housing	14.42320031
Health Outcomes	—
Insured adults	22.41755422
Arthritis	48.2
Asthma ER Admissions	42.5
High Blood Pressure	39.5
Cancer (excluding skin)	82.6
Asthma	16.4

Coronary Heart Disease	43.7
Chronic Obstructive Pulmonary Disease	29.1
Diagnosed Diabetes	22.3
Life Expectancy at Birth	19.2
Cognitively Disabled	58.3
Physically Disabled	60.6
Heart Attack ER Admissions	7.4
Mental Health Not Good	14.3
Chronic Kidney Disease	27.1
Obesity	8.0
Pedestrian Injuries	57.7
Physical Health Not Good	15.6
Stroke	29.9
Health Risk Behaviors	—
Binge Drinking	58.7
Current Smoker	15.0
No Leisure Time for Physical Activity	10.6
Climate Change Exposures	—
Wildfire Risk	0.0
SLR Inundation Area	0.0
Children	20.9
Elderly	91.7
English Speaking	32.2
Foreign-born	65.8
Outdoor Workers	20.1
Climate Change Adaptive Capacity	—
Impervious Surface Cover	67.4

Traffic Density	16.8
Traffic Access	23.0
Other Indices	—
Hardship	90.9
Other Decision Support	—
2016 Voting	12.5

7.3. Overall Health & Equity Scores

Metric	Result for Project Census Tract
CalEnviroScreen 4.0 Score for Project Location (a)	52.0
Healthy Places Index Score for Project Location (b)	9.00
Project Located in a Designated Disadvantaged Community (Senate Bill 535)	No
Project Located in a Low-Income Community (Assembly Bill 1550)	Yes
Project Located in a Community Air Protection Program Community (Assembly Bill 617)	No

a: The maximum CalEnviroScreen score is 100. A high score (i.e., greater than 50) reflects a higher pollution burden compared to other census tracts in the state.
b: The maximum Health Places Index score is 100. A high score (i.e., greater than 50) reflects healthier community conditions compared to other census tracts in the state.

7.4. Health & Equity Measures

No Health & Equity Measures selected.

7.5. Evaluation Scorecard

Health & Equity Evaluation Scorecard not completed.

7.6. Health & Equity Custom Measures

No Health & Equity Custom Measures created.

8. User Changes to Default Data

Screen	Justification

Land Use	20.14 ac site w/ 301,101 sf warehouse (building footprint 297,101 or ~6.82 ac), 148,396 sf landscaping (~3.41 ac), paving of a parking lot with 284 spaces (120 auto & 164 trailer spaces), & remainder of site (~7.35 ac) paving of on-site roadways/loading dock areas etc.
Construction: Construction Phases	Construction anticipated to begin early July 2024 & be completed by the beginning of April 2025. Site vacant, no demo/site prep.
Construction: Off-Road Equipment	CalEEmod default construction timing for building construction reduced by ~60%; therefore, ~60% more equipment added to default CalEEMod equipment list for building construction. 11,450 CY export during grading.
Operations: Vehicle Data	Per Trip Generation Comparison, 1.81 trips/TSF/day. Percentages changed to 87.5% autos (H-W) & 12.5% trucks (W-O). Per SCAQMD W-O trip length changed to 40 miles.
Operations: Fleet Mix	Revised vehicle fleet mix per traffic study of 87.5% Autos, 2% 2-Axle Trucks, 2.6% 3-Axle Trucks and 7.9% 4+ Axle Trucks.
Construction: Architectural Coatings	SCAQMD Rule 1113 limits architectural coatings for buildings to 50 g/L VOC.
Operations: Off-Road Equipment	As the tenant is not currently known, to be conservative, offroad sources include emissions from the use of two CNG forklifts, 6 hours a day, 5 days a week inside the warehouse.
Operations: Emergency Generators and Fire Pumps	Stationary sources include emissions from the occasional use/testing of a 400 HP emergency back-up generator 12 hours a year and 200 HP emergency fire pump 12 hours a year.

Source: EMFAC2021 (v1.0.1) Emissions Inventory
Region Type: Air Basin
Region: South Coast
Calendar Year: 2024
Season: Annual
Vehicle Classification: EMFAC2007 Categories
Units: miles/day for CVMT and EVMT, trips/day for Trips, kWh/day for Energy Consumption, tons/day for Emissions, 1000 gallons/day for Fuel Consumption

Region	Calendar Year	Vehicle Category	Model Year	Speed	Fuel	Population	Trips	Energy Consumption	Fuel Consumption	Fuel Consumption	Total Fuel Consumption	Total VMT	Total VMT	Miles Per Gallon	Vehicle Class
South Coast	2024	HHDT	Aggregate	Aggregate	Gasoline	64.44258918	1289.367324	0	1.014953313	1014.953313	2024777.341	4089.563798	12241163.02	**6.05**	**HHDT**
South Coast	2024	HHDT	Aggregate	Aggregate	Diesel	92441.35478	1412165.896	0	1913.394963	1913394.963		11547992.76			
South Coast	2024	HHDT	Aggregate	Aggregate	Electricity	291.6455699	3957.931048	53675.68637	0	0		29968.60823			
South Coast	2024	HHDT	Aggregate	Aggregate	Natural Gas	10239.41118	65591.6649	0	110.3674239	110367.4239		659112.0885			
South Coast	2024	LDA	Aggregate	Aggregate	Gasoline	5306414.643	24694249.92	0	7344.088111	7344088.111	7477826.02	213709568	234427100.1	**31.35**	**LDA**
South Coast	2024	LDA	Aggregate	Aggregate	Diesel	14576.24539	60769.87324	0	10.8801639	10880.1639		447477.6987			
South Coast	2024	LDA	Aggregate	Aggregate	Electricity	278128.8376	1389682.584	5111363.117	0	0		13239042.59			
South Coast	2024	LDA	Aggregate	Aggregate	Plug-in Hybrid	148523.7719	614145.7966	1077276.451	122.8577446	122857.7446		7031011.891			
South Coast	2024	LDT1	Aggregate	Aggregate	Gasoline	490973.66	2160511.155	0	732.0519082	732051.9082	732790.8073	17788975.08	17880208.77	**24.40**	**LDT1**
South Coast	2024	LDT1	Aggregate	Aggregate	Diesel	178.9755587	511.7069897	0	0.143610092	143.6100917		3350.970633			
South Coast	2024	LDT1	Aggregate	Aggregate	Electricity	1222.38175	5792.038269	19502.00434	0	0		50512.52673			
South Coast	2024	LDT1	Aggregate	Aggregate	Plug-in Hybrid	719.1459798	2973.668627	6252.19918	0.595288961	595.288961		37370.18633			
South Coast	2024	LDT2	Aggregate	Aggregate	Gasoline	2478766.891	11657788.42	0	4349.789244	4349789.244	4378677.328	102696789.3	104694804	**23.91**	**LDT2**
South Coast	2024	LDT2	Aggregate	Aggregate	Diesel	8144.015434	39238.54602	0	11.30594953	11305.94953		354089.2658			
South Coast	2024	LDT2	Aggregate	Aggregate	Electricity	16093.72479	82313.84321	227422.9885	0	0		589052.7755			
South Coast	2024	LDT2	Aggregate	Aggregate	Plug-in Hybrid	21096.29549	87233.18184	170348.4264	17.58213479	17582.13479		1054872.659			
South Coast	2024	LHDT1	Aggregate	Aggregate	Gasoline	200171.2476	2982253.334	0	578.7247685	578724.7685	792458.1109	7891021.12	12336952.39	**15.57**	**LHDT1**
South Coast	2024	LHDT1	Aggregate	Aggregate	Diesel	103884.7559	1306739.542	0	213.7333424	213733.3424		4387648.579			
South Coast	2024	LHDT1	Aggregate	Aggregate	Electricity	772.5188678	10791.59936	32624.15974	0	0		58282.68619			
South Coast	2024	LHDT2	Aggregate	Aggregate	Gasoline	31062.46526	462784.4493	0	96.72139231	96721.39231	208303.4828	1155378.828	3095264.249	**14.86**	**LHDT2**
South Coast	2024	LHDT2	Aggregate	Aggregate	Diesel	45926.82058	577701.627	0	111.5820905	111582.0905		1925592.444			
South Coast	2024	LHDT2	Aggregate	Aggregate	Electricity	199.9520404	2646.759351	8006.869611	0	0		14292.97674			
South Coast	2024	MCY	Aggregate	Aggregate	Gasoline	242059.9929	484119.9858	0	37.44895514	37448.95514	37448.95514	1554780.429	1554780.429	**41.52**	**MCY**
South Coast	2024	MDV	Aggregate	Aggregate	Gasoline	1571312.1	7270009.961	0	3162.700535	3162700.535	3206338.183	60817091.34	62832018.9	**19.60**	**MDV**
South Coast	2024	MDV	Aggregate	Aggregate	Diesel	19826.89781	93051.64962	0	33.54860069	33548.60069		786624.2122			
South Coast	2024	MDV	Aggregate	Aggregate	Electricity	17569.44798	89870.84023	248334.7848	0	0		643216.8322			
South Coast	2024	MDV	Aggregate	Aggregate	Plug-in Hybrid	12690.57185	52475.51459	92596.30611	10.08904803	10089.04803		585086.5214			
South Coast	2024	MH	Aggregate	Aggregate	Gasoline	29244.94397	2925.664195	0	57.51222476	57512.22476	68984.14797	279544.6577	395398.9997	**5.73**	**MH**
South Coast	2024	MH	Aggregate	Aggregate	Diesel	11703.55798	1170.355798	0	11.47192321	11471.92321		115854.342			
South Coast	2024	MHDT	Aggregate	Aggregate	Gasoline	24845.17438	497102.249	0	256.9342026	256934.2026	812250.5213	1326417.556	6295601.951	**7.75**	**MHDT**
South Coast	2024	MHDT	Aggregate	Aggregate	Diesel	114693.757	1409921.86	0	546.7152883	546715.2883		4878223.739			
South Coast	2024	MHDT	Aggregate	Aggregate	Electricity	355.3876422	4781.870526	20310.12518	0	0		19393.49808			
South Coast	2024	MHDT	Aggregate	Aggregate	Natural Gas	1491.278079	13281.28453	0	8.601030453	8601.030453		71567.15805			
South Coast	2024	OBUS	Aggregate	Aggregate	Gasoline	5296.379398	105969.959	0	41.44060197	41440.60197	78066.51924	209991.62	473651.4166	**6.07**	**OBUS**
South Coast	2024	OBUS	Aggregate	Aggregate	Diesel	2997.3176	37996.11149	0	33.30106375	33301.06375		233646.4445			
South Coast	2024	OBUS	Aggregate	Aggregate	Electricity	11.86106715	237.3162316	941.3362619	0	0		895.192351			
South Coast	2024	OBUS	Aggregate	Aggregate	Natural Gas	480.7769521	4278.914873	0	3.324853528	3324.853528		29118.15975			
South Coast	2024	SBUS	Aggregate	Aggregate	Gasoline	2763.091965	11052.36786	0	13.6568139	13656.8139	40972.05843	121721.653	266076.6289	**6.49**	**SBUS**
South Coast	2024	SBUS	Aggregate	Aggregate	Diesel	3283.370627	47543.20668	0	9.104107226	9104.107226		66807.29386			
South Coast	2024	SBUS	Aggregate	Aggregate	Electricity	21.89425828	248.8609268	740.8107178	0	0		640.6727128			
South Coast	2024	SBUS	Aggregate	Aggregate	Natural Gas	3093.465789	44793.38463	0	18.21113731	18211.13731		76907.00926			
South Coast	2024	UBUS	Aggregate	Aggregate	Gasoline	894.3284655	3577.313862	0	13.89822542	13898.22542	201736.9577	96953.45183	696232.1909	**3.45**	**UBUS**
South Coast	2024	UBUS	Aggregate	Aggregate	Diesel	14.32857314	57.31429256	0	0.259550733	259.5507326		1721.679298			
South Coast	2024	UBUS	Aggregate	Aggregate	Electricity	109.3235246	437.2940985	19519.17282	0	0		9364.629999			
South Coast	2024	UBUS	Aggregate	Aggregate	Natural Gas	4918.59249	19674.36996	0	187.5791815	187579.1815		588192.4297			

APPENDIX C

AERMOD MODEL PRINTOUTS

Emission Assumptions **DPM** Emissions

19370 Redlands Avenue West Industrial Project

Facility Operations

Buildout year: 2023

Emission Factors

1) Onsite Vehicle Emissions

a) Truck

(1) EMFAC2021

(a) Annual Meteorology

Temperature: 66 degF

Relative Humidity: 60%

(b) Calculations for Riverside County

(c) Truck Mix

4+ axle heavy-heavy duty diesel trucks (HHDT)

4 axle diesel trucks (MHDT)

2 axle diesel trucks (LHDT2)

(d) Onsite Truck Travel Speed: 10 mph

(e) Off-site Truck Travel Speed: 35 mph

(f) Idle speed: 0 mph

(g) Truck Idle time: 15 minutes per truck per day

2) Other Parameters

(a) Width of Truck Source: 8.5 feet

(b) Truck Operational Schedule 24 hours/day

(c) Height of Truck: 13.5 feet

(d) Release Height: 3.5 meters

19370 Redlands Avenue West Industrial Project | **Emission:** | **DPM**

Processes Modeled | **Build-out:** | **2023**

Onsite delivery traffic
Truck idling
Offsite delivery traffic

Facilities in Operation

Location	Truck type	Daily trucks
Project Site	HHDT	102
Project Site	MHDT	34
Project Site	LHDT2	27
Total		**163**

Delivery Schedule:

24 **hrs/day, 52 weeks/year**

Emission Factors 1 Year (2023)

Vehicle Class	Onsite Exhaust (g/mi)	Offsite Exhaust (g/mi)	Idle (g/hr)
HHDT	0.01258	0.00856	0.01631
MHDT	0.04522	0.01037	0.08675
LHDT2	0.05961	0.02374	0.77884

Onsite Roadway Links Modeled

Link	Truck Type	Emission Factor (g/mi)	Trips per day (in and out)	Length (m)	Length (mi)	Daily Emissions Over the Link (g/day)	Emissions Over the Link (g/sec)	Emissions Over Link (lb/hr)	Daily Emissions (lbs/day)	Annual Avg Emissions Over Link (tons/yr)	Total Daily Emissions for all Vehicles (g/sec)	
From northern project driveway to southern project driveway	HHDT	0.01258	102	566.5	0.35	4.52E-01	5.23E-06	3.58E+00	9.95E-04	1.82E-04		
From northern project driveway to southern project driveway	MHDT	0.04522	34	566.5	0.35	5.41E-01	6.26E-06	4.29E+00	1.19E-03	2.17E-04	**1.80E-05**	100% of trucks
From northern project driveway to southern project driveway	LHDT2	0.05961	27	566.5	0.35	5.66E-01	6.56E-06	4.49E+00	1.25E-03	2.28E-04		

Truck Idling | Idle time | 15 minutes

Building/Location	Truck Type	Emission Factor (g/idle-hour)	Idling Time (min)	Daily Trucks	Total Emissions (g/day)	Max Hourly Emissions (g/sec)	Max Hourly Emissions (lb/hr)	Total Daily Emissions (lbs/day)	Total Emissions (tons/yr)	Total Emissions (tons/yr)		
At entrance/exit gates and truck loading areas	HHDT	0.01631	15	102	0.42	4.81E-06	3.82E-05	9.16E-04	1.67E-04			
At entrance/exit gates and truck loading areas	MHDT	0.08675	15	34	0.74	8.53E-06	6.77E-05	1.62E-03	2.96E-04		7.42E-05	
At entrance/exit gates and truck loading areas	LHDT2	0.77884	15	27	5.26	6.08E-05	4.82E-04	1.16E-02	2.11E-03		**1.24E-05**	per idling location
												(6 total)

Offsite Roadway Links Modeled

Link	Truck Type	Emission Factor (g/mi)	Trips per day	Length (m)	Length (mi)	Daily Emissions Over the Link (g/day)	Emissions Over the Link (g/sec)	Max Hourly Emissions Over Link (lb/hr)	Daily Emissions (lbs/day)	Annual Avg Emissions Over Link (tons/yr)		
Redlands Ave southern project driveway to northern project driveway	HHDT	0.00856	102	241.6	0.15	1.31E-01	1.52E-06	1.04E+00	2.89E-04	5.27E-05	50% of trucks	
Redlands Ave southern project driveway to northern project driveway	MHDT	0.01037	34	241.6	0.15	5.29E-02	6.13E-07	4.20E-01	1.17E-04	2.13E-05	**1.62E-06**	
Redlands Ave southern project driveway to northern project driveway	LHDT2	0.02374	27	241.6	0.15	9.62E-02	1.11E-06	7.63E-01	2.12E-04	3.87E-05		
Redlands Ave north of northern project driveway	HHDT	0.00856	102	671.8	0.42	3.65E-01	4.22E-06	2.89E+00	8.03E-04	1.47E-04	100% of trucks	
Redlands Ave north of northern project driveway	MHDT	0.01037	34	671.8	0.42	1.47E-01	1.70E-06	1.17E+00	3.24E-04	5.92E-05	**9.02E-06**	
Redlands Ave north of northern project driveway	LHDT2	0.02374	27	671.8	0.42	2.67E-01	3.10E-06	2.12E+00	5.89E-04	1.08E-04		

19370 Redlands Avenue West Industrial Project | **Emission:** | **DPM**

Processes Modeled | **Build-out:** | **2023**

Onsite delivery traffic
Truck idling
Offsite delivery traffic

Facilities in Operation

Location	Truck type	Daily trucks
Project Site	HHDT	102
Project Site	MHDT	34
Project Site	LHDT2	27
Total		**163**

Delivery Schedule:

24 **hrs/day, 52weeks/year**

Emission Factors 2 Year

Vehicle Class	Onsite Exhaust (g/mi)	Offsite Exhaust (g/mi)	Idle (g/hr)
HHDT	0.01198	0.00811	0.01500
MHDT	0.03520	0.00833	0.06652
LHDT2	0.05232	0.02124	0.77760

Onsite Roadway Links Modeled

Link	Truck Type	Emission Factor (g/mi)	Trips per day (in and out)	Length (m)	Length (mi)	Daily Emissions Over the Link (g/day)	Emissions Over the Link (g/sec)	Emissions Over Link (lb/hr)	Daily Emissions (lbs/day)	Annual Avg Emissions Over Link (tons/yr)	Total Daily Emissions for all Vehicles (g/sec)	
From northern project driveway to southern project driveway	HHDT	0.01198	102	566.5	0.35	4.30E-01	4.98E-06	3.41E+00	9.47E-04	1.73E-04		
From northern project driveway to southern project driveway	MHDT	0.03520	34	566.5	0.35	4.21E-01	4.87E-06	3.34E+00	9.28E-04	1.69E-04	**1.56E-05**	100% of trucks
From northern project driveway to southern project driveway	LHDT2	0.05232	27	566.5	0.35	4.97E-01	5.75E-06	3.94E+00	1.09E-03	2.00E-04		

Truck Idling | Idle time | 15 minutes

Building/Location	Truck Type	Emission Factor (g/idle-hour)	Idling Time (min)	Daily Trucks	Total Emissions (g/day)	Max Hourly Emissions (g/sec)	Max Hourly Emissions (lb/hr)	Total Daily Emissions (lbs/day)	Total Emissions (tons/yr)	Total Emissions (tons/yr)		
At entrance/exit gates and truck loading areas	HHDT	0.01500	15	102	0.38	4.43E-06	3.51E-05	8.43E-04	1.54E-04			
At entrance/exit gates and truck loading areas	MHDT	0.06652	15	34	0.57	6.54E-06	5.19E-05	1.25E-03	2.27E-04		7.17E-05	
At entrance/exit gates and truck loading areas	LHDT2	0.77760	15	27	5.25	6.07E-05	4.82E-04	1.16E-02	2.11E-03		**1.20E-05**	per idling location
												(6 total)

Offsite Roadway Links Modeled

Link	Truck Type	Emission Factor (g/mi)	Trips per day	Length (m)	Length (mi)	Daily Emissions Over the Link (g/day)	Emissions Over the Link (g/sec)	Max Hourly Emissions Over Link (lb/hr)	Daily Emissions (lbs/day)	Annual Avg Emissions Over Link (tons/yr)		
Redlands Ave southern project driveway to northern project driveway	HHDT	0.00811	102	241.6	0.15	1.24E-01	1.44E-06	9.85E-01	2.74E-04	4.99E-05	50% of trucks	
Redlands Ave southern project driveway to northern project driveway	MHDT	0.00833	34	241.6	0.15	4.25E-02	4.92E-07	3.37E-01	9.36E-05	1.71E-05	**1.46E-06**	
Redlands Ave southern project driveway to northern project driveway	LHDT2	0.02124	27	241.6	0.15	8.61E-02	9.96E-07	6.83E-01	1.90E-04	3.46E-05		
Redlands Ave north of northern project driveway	HHDT	0.00811	102	671.8	0.42	3.45E-01	4.00E-06	2.74E+00	7.61E-04	1.39E-04	100% of trucks	
Redlands Ave north of northern project driveway	MHDT	0.00833	34	671.8	0.42	1.18E-01	1.37E-06	9.37E-01	2.60E-04	4.75E-05	**8.14E-06**	
Redlands Ave north of northern project driveway	LHDT2	0.02124	27	671.8	0.42	2.39E-01	2.77E-06	1.90E+00	5.27E-04	9.62E-05		

19370 Redlands Avenue West Industrial Project | **Emission:** | **DPM**

Processes Modeled | **Build-out:** | **2023**

Onsite delivery traffic
Truck idling
Offsite delivery traffic

Facilities in Operation

Location	Truck type	Daily trucks
Project Site	HHDT	102
Project Site	MHDT	34
Project Site	LHDT2	27
Total		**163**

Delivery Schedule:

24 **hrs/day, 52weeks/year**

Emission Factors 14 Year 2026-2039

Vehicle Class	Onsite Exhaust (g/mi)	Offsite Exhaust (g/mi)	Idle (g/hr)
HHDT	0.00969	0.00658	0.01135
MHDT	0.01154	0.00340	0.02150
LHDT2	0.03945	0.01734	0.76899

Onsite Roadway Links Modeled

Link	Truck Type	Emission Factor (g/mi)	Trips per day (in and out)	Length (m)	Length (mi)	Daily Emissions Over the Link (g/day)	Emissions Over the Link (g/sec)	Emissions Over Link (lb/hr)	Daily Emissions (lbs/day)	Annual Avg Emissions Over Link (tons/yr)	Total Daily Emissions for all Vehicles (g/sec)	
From northern project driveway to southern project driveway	HHDT	0.00969	102	566.5	0.35	3.48E-01	4.03E-06	2.76E+00	7.66E-04	1.40E-04		
From northern project driveway to southern project driveway	MHDT	0.01154	34	566.5	0.35	1.38E-01	1.60E-06	1.10E+00	3.04E-04	5.55E-05	**9.96E-06**	100% of trucks
From northern project driveway to southern project driveway	LHDT2	0.03945	27	566.5	0.35	3.75E-01	4.34E-06	2.97E+00	8.26E-04	1.51E-04		

Truck Idling | Idle time | 15 minutes

Building/Location	Truck Type	Emission Factor (g/idle-hour)	Idling Time (min)	Daily Trucks	Total Emissions (g/day)	Max Hourly Emissions (g/sec)	Max Hourly Emissions (lb/hr)	Total Daily Emissions (lbs/day)	Total Emissions (tons/yr)	Total Emissions (tons/yr)		
At entrance/exit gates and truck loading areas	HHDT	0.01135	15	102	0.29	3.35E-06	2.66E-05	6.38E-04	1.16E-04			
At entrance/exit gates and truck loading areas	MHDT	0.02150	15	34	0.18	2.11E-06	1.68E-05	4.02E-04	7.35E-05		6.55E-05	
At entrance/exit gates and truck loading areas	LHDT2	0.76899	15	27	5.19	6.01E-05	4.76E-04	1.14E-02	2.09E-03		**1.09E-05**	per idling location
												(6 total)

Offsite Roadway Links Modeled

Link	Truck Type	Emission Factor (g/mi)	Trips per day	Length (m)	Length (mi)	Daily Emissions Over the Link (g/day)	Emissions Over the Link (g/sec)	Max Hourly Emissions Over Link (lb/hr)	Daily Emissions (lbs/day)	Annual Avg Emissions Over Link (tons/yr)		
Redlands Ave southern project driveway to northern project driveway	HHDT	0.00658	102	241.6	0.15	1.01E-01	1.17E-06	7.99E-01	2.22E-04	4.05E-05	50% of trucks	
Redlands Ave southern project driveway to northern project driveway	MHDT	0.00340	34	241.6	0.15	1.73E-02	2.01E-07	1.37E-01	3.82E-05	6.97E-06	**1.09E-06**	
Redlands Ave southern project driveway to northern project driveway	LHDT2	0.01734	27	241.6	0.15	7.03E-02	8.13E-07	5.57E-01	1.55E-04	2.83E-05		
Redlands Ave north of northern project driveway	HHDT	0.00658	102	671.8	0.42	2.80E-01	3.24E-06	2.22E+00	6.17E-04	1.13E-04	100% of trucks	
Redlands Ave north of northern project driveway	MHDT	0.00340	34	671.8	0.42	4.82E-02	5.58E-07	3.82E-01	1.06E-04	1.94E-05	**6.06E-06**	
Redlands Ave north of northern project driveway	LHDT2	0.01734	27	671.8	0.42	1.95E-01	2.26E-06	1.55E+00	4.30E-04	7.86E-05		

19370 Redlands Avenue West Industrial Project		Emission:	DPM									
Processes Modeled		**Build-out:**	**2023**									
Onsite delivery traffic												
Truck idling												
Offsite delivery traffic												
Facilities in Operation												
Location	**Truck type**	**Daily trucks**										
Project Site	HHDT	102										
Project Site	MHDT	34										
Project Site	LHDT2	27										
Total		**163**										
Delivery Schedule:												
	24	**hrs/day, 52weeks/year**										
Emission Factors 14 Year 2040-2053	**Onsite Exhaust**	**Offsite Exhaust**	**Idle**									
Vehicle Class	**(g/mi)**	**(g/mi)**	**(g/hr)**									
HHDT	0.00821	0.00565	0.00975									
MHDT	0.00328	0.00154	0.00743									
LHDT2	0.03556	0.01660	0.76156									
Onsite Roadway Links Modeled												
Link	**Truck Type**	**Emission Factor (g/mi)**	**Trips per day (in and out)**	**Length (m)**	**Length (mi)**	**Daily Emissions Over the Link (g/day)**	**Emissions Over the Link (g/sec)**	**Emissions Over Link (lb/hr)**	**Daily Emissions (lbs/day)**	**Annual Avg Emissions Over Link (tons/yr)**	**Total Daily Emissions for all Vehicles (g/sec)**	
From northern project driveway to southern project driveway	HHDT	0.00821	102	566.5	0.35	2.95E-01	3.41E-06	2.34E+00	6.49E-04	1.18E-04		
From northern project driveway to southern project driveway	MHDT	0.00328	34	566.5	0.35	3.93E-02	4.55E-07	3.11E-01	8.65E-05	1.58E-05	**7.77E-06**	100% of trucks
From northern project driveway to southern project driveway	LHDT2	0.03556	27	566.5	0.35	3.38E-01	3.91E-06	2.68E+00	7.44E-04	1.36E-04		
Truck Idling	Idle time		15 minutes									
Building/Location	**Truck Type**	**Emission Factor (g/idle-hour)**	**Idling Time (min)**	**Daily Trucks**	**Total Emissions (g/day)**	**Max Hourly Emissions (g/sec)**	**Max Hourly Emissions (lb/hr)**	**Total Daily Emissions (lbs/day)**	**Total Emissions (tons/yr)**	**Total Emissions (tons/yr)**		
At entrance/exit gates and truck loading areas	HHDT	0.00975	15	102	0.25	2.88E-06	2.28E-05	5.48E-04	1.00E-04			
At entrance/exit gates and truck loading areas	MHDT	0.00743	15	34	0.06	7.31E-07	5.80E-06	1.39E-04	2.54E-05		6.31E-05	
At entrance/exit gates and truck loading areas	LHDT2	0.76156	15	27	5.14	5.95E-05	4.72E-04	1.13E-02	2.07E-03		**1.05E-05**	per idling location
												(6 total)
Offsite Roadway Links Modeled												
Link	**Truck Type**	**Emission Factor (g/mi)**	**Trips per day**	**Length (m)**	**Length (mi)**	**Daily Emissions Over the Link (g/day)**	**Emissions Over the Link (g/sec)**	**Max Hourly Emissions Over Link (lb/hr)**	**Daily Emissions (lbs/day)**	**Annual Avg Emissions Over Link (tons/yr)**		
Redlands Ave southern project driveway to northern project driveway	HHDT	0.00565	102	241.6	0.15	8.65E-02	1.00E-06	6.86E-01	1.91E-04	3.48E-05	50% of trucks	
Redlands Ave southern project driveway to northern project driveway	MHDT	0.00154	34	241.6	0.15	7.86E-03	9.09E-08	6.23E-02	1.73E-05	3.16E-06	**9.35E-07**	
Redlands Ave southern project driveway to northern project driveway	LHDT2	0.01660	27	241.6	0.15	6.73E-02	7.79E-07	5.33E-01	1.48E-04	2.70E-05		
Redlands Ave north of northern project driveway	HHDT	0.00565	102	671.8	0.42	2.41E-01	2.78E-06	1.91E+00	5.30E-04	9.67E-05	100% of trucks	
Redlands Ave north of northern project driveway	MHDT	0.00154	34	671.8	0.42	2.18E-02	2.53E-07	1.73E-01	4.81E-05	8.78E-06	**5.20E-06**	
Redlands Ave north of northern project driveway	LHDT2	0.01660	27	671.8	0.42	1.87E-01	2.17E-06	1.48E+00	4.12E-04	7.52E-05		

```
** Lakes Environmental AERMOD MPI
**
**************************************
**
** AERMOD Input Produced by:
** AERMOD View Ver. 11.2.0
** Lakes Environmental Software Inc.
** Date: 4/4/2023
** File: C:\Lakes\AERMOD View\19370 Redlands Avenue West OY\19370 Redlands Avenue West OY.ADI
**
**************************************
**
**
**************************************
** AERMOD Control Pathway
**************************************
**
**
CO STARTING
   TITLEONE 19370 Redlands Avenue West  - new site plan
   TITLETWO DPM Conc 2023 OY
   MODELOPT DFAULT CONC
   AVERTIME PERIOD
   URBANOPT 2189641 Riverside_County
   POLLUTID DPM
   RUNORNOT RUN
   ERRORFIL "19370 Redlands Avenue West OY.err"
CO FINISHED
**
**************************************
** AERMOD Source Pathway
**************************************
**
**
SO STARTING
** Source Location **
** Source ID - Type - X Coord. - Y Coord. **
   LOCATION STCK1        POINT      479650.520  3743097.530      441.230
** DESCRSRC Idling location
   LOCATION STCK2        POINT      479648.780  3742857.061      441.140
** DESCRSRC Idling location
   LOCATION STCK3        POINT      479532.538  3743072.983      441.920
** DESCRSRC Idling location
   LOCATION STCK4        POINT      479531.377  3743020.952      441.800
** DESCRSRC Idling location
   LOCATION STCK5        POINT      479529.519  3742977.748      441.680
** DESCRSRC Idling location
   LOCATION STCK6        POINT      479530.216  3742931.060      441.680
** DESCRSRC Idling location
** ----------------------------------------------------------------------
** Line Source Represented by Adjacent Volume Sources
```

```
** LINE VOLUME Source ID = SLINE1
** DESCRSRC Onsite truck travel
** PREFIX
** Length of Side = 8.59
** Configuration = Adjacent
** Emission Rate = 0.000018
** Elevated
** Building Height = 10.97
** SZINIT = 5.10
** Nodes = 11
** 479659.651, 3742857.442, 441.11, 3.50, 4.00
** 479633.553, 3742854.794, 441.08, 3.50, 4.00
** 479531.052, 3742855.929, 441.83, 3.50, 4.00
** 479520.840, 3742857.442, 441.83, 3.50, 4.00
** 479472.804, 3742961.834, 441.98, 3.50, 4.00
** 479458.809, 3742999.658, 442.03, 3.50, 4.00
** 479461.079, 3743039.750, 442.18, 3.50, 4.00
** 479470.535, 3743073.413, 441.94, 3.50, 4.00
** 479507.980, 3743094.594, 441.71, 3.50, 4.00
** 479548.451, 3743101.024, 441.34, 3.50, 4.00
** 479661.543, 3743099.511, 441.23, 3.50, 4.00
** ----------------------------------------------------------------------
   LOCATION L0000001     VOLUME   479655.378 3742857.008 441.14
   LOCATION L0000002     VOLUME   479646.831 3742856.141 441.13
   LOCATION L0000003     VOLUME   479638.284 3742855.274 441.12
   LOCATION L0000004     VOLUME   479629.718 3742854.837 441.11
   LOCATION L0000005     VOLUME   479621.128 3742854.932 441.12
   LOCATION L0000006     VOLUME   479612.537 3742855.027 441.14
   LOCATION L0000007     VOLUME   479603.947 3742855.122 441.15
   LOCATION L0000008     VOLUME   479595.357 3742855.217 441.29
   LOCATION L0000009     VOLUME   479586.766 3742855.312 441.44
   LOCATION L0000010     VOLUME   479578.176 3742855.407 441.58
   LOCATION L0000011     VOLUME   479569.586 3742855.502 441.65
   LOCATION L0000012     VOLUME   479560.996 3742855.597 441.72
   LOCATION L0000013     VOLUME   479552.405 3742855.692 441.79
   LOCATION L0000014     VOLUME   479543.815 3742855.788 441.80
   LOCATION L0000015     VOLUME   479535.225 3742855.883 441.81
   LOCATION L0000016     VOLUME   479526.682 3742856.576 441.82
   LOCATION L0000017     VOLUME   479519.717 3742859.881 441.83
   LOCATION L0000018     VOLUME   479516.126 3742867.685 441.83
   LOCATION L0000019     VOLUME   479512.535 3742875.489 441.85
   LOCATION L0000020     VOLUME   479508.944 3742883.294 441.86
   LOCATION L0000021     VOLUME   479505.353 3742891.098 441.84
   LOCATION L0000022     VOLUME   479501.762 3742898.902 441.83
   LOCATION L0000023     VOLUME   479498.171 3742906.706 441.80
   LOCATION L0000024     VOLUME   479494.580 3742914.510 441.78
   LOCATION L0000025     VOLUME   479490.989 3742922.315 441.84
   LOCATION L0000026     VOLUME   479487.398 3742930.119 441.89
   LOCATION L0000027     VOLUME   479483.807 3742937.923 441.95
   LOCATION L0000028     VOLUME   479480.216 3742945.727 442.00
   LOCATION L0000029     VOLUME   479476.625 3742953.532 441.98
```

```
   LOCATION L0000030     VOLUME   479473.033 3742961.336 441.97
   LOCATION L0000031     VOLUME   479470.013 3742969.377 441.95
   LOCATION L0000032     VOLUME   479467.032 3742977.434 441.95
   LOCATION L0000033     VOLUME   479464.051 3742985.491 441.98
   LOCATION L0000034     VOLUME   479461.070 3742993.548 442.00
   LOCATION L0000035     VOLUME   479458.927 3743001.730 442.03
   LOCATION L0000036     VOLUME   479459.412 3743010.307 442.06
   LOCATION L0000037     VOLUME   479459.898 3743018.884 442.10
   LOCATION L0000038     VOLUME   479460.383 3743027.461 442.15
   LOCATION L0000039     VOLUME   479460.869 3743036.039 442.19
   LOCATION L0000040     VOLUME   479462.397 3743044.442 442.13
   LOCATION L0000041     VOLUME   479464.720 3743052.713 442.06
   LOCATION L0000042     VOLUME   479467.043 3743060.983 442.00
   LOCATION L0000043     VOLUME   479469.366 3743069.254 441.95
   LOCATION L0000044     VOLUME   479474.252 3743075.516 441.92
   LOCATION L0000045     VOLUME   479481.729 3743079.745 441.90
   LOCATION L0000046     VOLUME   479489.207 3743083.975 441.87
   LOCATION L0000047     VOLUME   479496.684 3743088.205 441.81
   LOCATION L0000048     VOLUME   479504.162 3743092.434 441.74
   LOCATION L0000049     VOLUME   479512.132 3743095.254 441.67
   LOCATION L0000050     VOLUME   479520.616 3743096.602 441.61
   LOCATION L0000051     VOLUME   479529.101 3743097.950 441.56
   LOCATION L0000052     VOLUME   479537.585 3743099.298 441.50
   LOCATION L0000053     VOLUME   479546.069 3743100.646 441.43
   LOCATION L0000054     VOLUME   479554.630 3743100.941 441.40
   LOCATION L0000055     VOLUME   479563.220 3743100.827 441.36
   LOCATION L0000056     VOLUME   479571.810 3743100.712 441.32
   LOCATION L0000057     VOLUME   479580.400 3743100.597 441.28
   LOCATION L0000058     VOLUME   479588.990 3743100.482 441.26
   LOCATION L0000059     VOLUME   479597.580 3743100.367 441.23
   LOCATION L0000060     VOLUME   479606.170 3743100.252 441.21
   LOCATION L0000061     VOLUME   479614.760 3743100.137 441.19
   LOCATION L0000062     VOLUME   479623.350 3743100.022 441.17
   LOCATION L0000063     VOLUME   479631.940 3743099.907 441.16
   LOCATION L0000064     VOLUME   479640.530 3743099.792 441.16
   LOCATION L0000065     VOLUME   479649.120 3743099.677 441.16
   LOCATION L0000066     VOLUME   479657.710 3743099.562 441.16
** End of LINE VOLUME Source ID = SLINE1
** ----------------------------------------------------------------------
** Line Source Represented by Adjacent Volume Sources
** LINE VOLUME Source ID = SLINE2
** DESCRSRC Redlands Ave southern project driveway to northern project driveway
** PREFIX
** Length of Side = 8.59
** Configuration = Adjacent
** Emission Rate = 1.62E-06
** Elevated
** Vertical Dimension = 7.00
** SZINIT = 1.63
** Nodes = 3
** 479668.640, 3742857.589, 441.06, 3.50, 4.00
```

```
** 479670.318, 3742876.889, 441.14, 3.50, 4.00
** 479670.328, 3743099.110, 441.22, 3.50, 4.00
** --------------------------------------------------------------------
   LOCATION L0000133     VOLUME   479669.012 3742861.868 441.08
   LOCATION L0000134     VOLUME   479669.756 3742870.427 441.10
   LOCATION L0000135     VOLUME   479670.318 3742878.993 441.13
   LOCATION L0000136     VOLUME   479670.319 3742887.584 441.14
   LOCATION L0000137     VOLUME   479670.319 3742896.175 441.13
   LOCATION L0000138     VOLUME   479670.320 3742904.766 441.13
   LOCATION L0000139     VOLUME   479670.320 3742913.356 441.12
   LOCATION L0000140     VOLUME   479670.320 3742921.947 441.09
   LOCATION L0000141     VOLUME   479670.321 3742930.538 441.06
   LOCATION L0000142     VOLUME   479670.321 3742939.129 441.04
   LOCATION L0000143     VOLUME   479670.322 3742947.720 441.02
   LOCATION L0000144     VOLUME   479670.322 3742956.310 441.02
   LOCATION L0000145     VOLUME   479670.322 3742964.901 441.02
   LOCATION L0000146     VOLUME   479670.323 3742973.492 441.02
   LOCATION L0000147     VOLUME   479670.323 3742982.083 441.05
   LOCATION L0000148     VOLUME   479670.323 3742990.674 441.09
   LOCATION L0000149     VOLUME   479670.324 3742999.264 441.12
   LOCATION L0000150     VOLUME   479670.324 3743007.855 441.16
   LOCATION L0000151     VOLUME   479670.325 3743016.446 441.20
   LOCATION L0000152     VOLUME   479670.325 3743025.037 441.23
   LOCATION L0000153     VOLUME   479670.325 3743033.628 441.27
   LOCATION L0000154     VOLUME   479670.326 3743042.218 441.30
   LOCATION L0000155     VOLUME   479670.326 3743050.809 441.33
   LOCATION L0000156     VOLUME   479670.327 3743059.400 441.35
   LOCATION L0000157     VOLUME   479670.327 3743067.991 441.37
   LOCATION L0000158     VOLUME   479670.327 3743076.582 441.32
   LOCATION L0000159     VOLUME   479670.328 3743085.172 441.28
   LOCATION L0000160     VOLUME   479670.328 3743093.763 441.23
** End of LINE VOLUME Source ID = SLINE2
** --------------------------------------------------------------------
** Line Source Represented by Adjacent Volume Sources
** LINE VOLUME Source ID = SLINE3
** DESCRSRC Redlands Ave north of northern project driveway
** PREFIX
** Length of Side = 8.59
** Configuration = Adjacent
** Emission Rate = 9.02E-06
** Elevated
** Vertical Dimension = 7.00
** SZINIT = 1.63
** Nodes = 10
** 479670.085, 3743103.428, 441.03, 3.50, 4.00
** 479666.590, 3743250.337, 441.29, 3.50, 4.00
** 479665.586, 3743329.579, 440.69, 3.50, 4.00
** 479667.593, 3743384.748, 440.26, 3.50, 4.00
** 479673.611, 3743417.849, 439.90, 3.50, 4.00
** 479686.651, 3743467.000, 440.36, 3.50, 4.00
** 479693.672, 3743507.123, 440.49, 3.50, 4.00
```

```
** 479698.688, 3743551.258, 440.18, 3.50, 4.00
** 479700.694, 3743608.433, 439.59, 3.50, 4.00
** 479699.691, 3743771.933, 440.59, 3.50, 4.00
** ----------------------------------------------------------------
   LOCATION L0000161     VOLUME   479669.983 3743107.722 440.88
   LOCATION L0000162     VOLUME   479669.778 3743116.311 440.60
   LOCATION L0000163     VOLUME   479669.574 3743124.899 440.32
   LOCATION L0000164     VOLUME   479669.370 3743133.487 440.33
   LOCATION L0000165     VOLUME   479669.165 3743142.076 440.54
   LOCATION L0000166     VOLUME   479668.961 3743150.664 440.76
   LOCATION L0000167     VOLUME   479668.757 3743159.252 440.97
   LOCATION L0000168     VOLUME   479668.552 3743167.841 441.00
   LOCATION L0000169     VOLUME   479668.348 3743176.429 441.02
   LOCATION L0000170     VOLUME   479668.144 3743185.017 441.04
   LOCATION L0000171     VOLUME   479667.939 3743193.606 441.09
   LOCATION L0000172     VOLUME   479667.735 3743202.194 441.16
   LOCATION L0000173     VOLUME   479667.531 3743210.783 441.24
   LOCATION L0000174     VOLUME   479667.326 3743219.371 441.31
   LOCATION L0000175     VOLUME   479667.122 3743227.959 441.32
   LOCATION L0000176     VOLUME   479666.918 3743236.548 441.32
   LOCATION L0000177     VOLUME   479666.713 3743245.136 441.31
   LOCATION L0000178     VOLUME   479666.547 3743253.725 441.29
   LOCATION L0000179     VOLUME   479666.438 3743262.315 441.23
   LOCATION L0000180     VOLUME   479666.329 3743270.905 441.16
   LOCATION L0000181     VOLUME   479666.220 3743279.495 441.09
   LOCATION L0000182     VOLUME   479666.112 3743288.086 440.97
   LOCATION L0000183     VOLUME   479666.003 3743296.676 440.83
   LOCATION L0000184     VOLUME   479665.894 3743305.266 440.68
   LOCATION L0000185     VOLUME   479665.785 3743313.856 440.55
   LOCATION L0000186     VOLUME   479665.677 3743322.446 440.61
   LOCATION L0000187     VOLUME   479665.639 3743331.035 440.67
   LOCATION L0000188     VOLUME   479665.952 3743339.620 440.74
   LOCATION L0000189     VOLUME   479666.264 3743348.206 440.74
   LOCATION L0000190     VOLUME   479666.576 3743356.791 440.68
   LOCATION L0000191     VOLUME   479666.888 3743365.376 440.62
   LOCATION L0000192     VOLUME   479667.200 3743373.961 440.56
   LOCATION L0000193     VOLUME   479667.513 3743382.546 440.37
   LOCATION L0000194     VOLUME   479668.735 3743391.032 440.18
   LOCATION L0000195     VOLUME   479670.272 3743399.485 440.00
   LOCATION L0000196     VOLUME   479671.809 3743407.937 439.84
   LOCATION L0000197     VOLUME   479673.345 3743416.389 439.72
   LOCATION L0000198     VOLUME   479675.433 3743424.718 439.60
   LOCATION L0000199     VOLUME   479677.636 3743433.022 439.47
   LOCATION L0000200     VOLUME   479679.839 3743441.325 439.57
   LOCATION L0000201     VOLUME   479682.042 3743449.629 439.84
   LOCATION L0000202     VOLUME   479684.245 3743457.932 440.09
   LOCATION L0000203     VOLUME   479686.448 3743466.236 440.34
   LOCATION L0000204     VOLUME   479687.996 3743474.684 440.41
   LOCATION L0000205     VOLUME   479689.476 3743483.146 440.45
   LOCATION L0000206     VOLUME   479690.957 3743491.608 440.49
   LOCATION L0000207     VOLUME   479692.438 3743500.070 440.51
```

```
   LOCATION L0000208     VOLUME   479693.834 3743508.545 440.49
   LOCATION L0000209     VOLUME   479694.804 3743517.081 440.46
   LOCATION L0000210     VOLUME   479695.774 3743525.616 440.43
   LOCATION L0000211     VOLUME   479696.744 3743534.152 440.38
   LOCATION L0000212     VOLUME   479697.714 3743542.688 440.30
   LOCATION L0000213     VOLUME   479698.684 3743551.224 440.23
   LOCATION L0000214     VOLUME   479698.988 3743559.809 440.15
   LOCATION L0000215     VOLUME   479699.289 3743568.395 440.13
   LOCATION L0000216     VOLUME   479699.590 3743576.980 440.11
   LOCATION L0000217     VOLUME   479699.892 3743585.566 440.08
   LOCATION L0000218     VOLUME   479700.193 3743594.151 439.99
   LOCATION L0000219     VOLUME   479700.494 3743602.737 439.82
   LOCATION L0000220     VOLUME   479700.676 3743611.324 439.65
   LOCATION L0000221     VOLUME   479700.623 3743619.915 439.48
   LOCATION L0000222     VOLUME   479700.571 3743628.505 439.44
   LOCATION L0000223     VOLUME   479700.518 3743637.096 439.43
   LOCATION L0000224     VOLUME   479700.465 3743645.687 439.42
   LOCATION L0000225     VOLUME   479700.413 3743654.277 439.51
   LOCATION L0000226     VOLUME   479700.360 3743662.868 439.86
   LOCATION L0000227     VOLUME   479700.307 3743671.459 440.21
   LOCATION L0000228     VOLUME   479700.255 3743680.049 440.56
   LOCATION L0000229     VOLUME   479700.202 3743688.640 440.67
   LOCATION L0000230     VOLUME   479700.149 3743697.230 440.68
   LOCATION L0000231     VOLUME   479700.096 3743705.821 440.68
   LOCATION L0000232     VOLUME   479700.044 3743714.412 440.67
   LOCATION L0000233     VOLUME   479699.991 3743723.002 440.55
   LOCATION L0000234     VOLUME   479699.938 3743731.593 440.43
   LOCATION L0000235     VOLUME   479699.886 3743740.184 440.30
   LOCATION L0000236     VOLUME   479699.833 3743748.774 440.31
   LOCATION L0000237     VOLUME   479699.780 3743757.365 440.43
   LOCATION L0000238     VOLUME   479699.728 3743765.956 440.56
** End of LINE VOLUME Source ID = SLINE3
   LOCATION PAREA1       AREAPOLY   479547.338  3743092.751      441.610
** DESCRSRC Emergency pumps and back-up generator
** Source Parameters **
   SRCPARAM STCK1        0.0000124     3.500   366.000    51.816       0.1
   SRCPARAM STCK2        0.0000124     3.500   366.000    51.816       0.1
   SRCPARAM STCK3        0.0000124     3.500   366.000    51.816       0.1
   SRCPARAM STCK4        0.0000124     3.500   366.000    51.816       0.1
   SRCPARAM STCK5        0.0000124     3.500   366.000    51.816       0.1
   SRCPARAM STCK6        0.0000124     3.500   366.000    51.816       0.1
** LINE VOLUME Source ID = SLINE1
   SRCPARAM L0000001     0.0000002727      3.50      4.00      5.10
   SRCPARAM L0000002     0.0000002727      3.50      4.00      5.10
   SRCPARAM L0000003     0.0000002727      3.50      4.00      5.10
   SRCPARAM L0000004     0.0000002727      3.50      4.00      5.10
   SRCPARAM L0000005     0.0000002727      3.50      4.00      5.10
   SRCPARAM L0000006     0.0000002727      3.50      4.00      5.10
   SRCPARAM L0000007     0.0000002727      3.50      4.00      5.10
   SRCPARAM L0000008     0.0000002727      3.50      4.00      5.10
   SRCPARAM L0000009     0.0000002727      3.50      4.00      5.10
```

```
SRCPARAM L0000010     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000011     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000012     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000013     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000014     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000015     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000016     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000017     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000018     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000019     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000020     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000021     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000022     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000023     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000024     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000025     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000026     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000027     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000028     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000029     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000030     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000031     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000032     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000033     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000034     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000035     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000036     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000037     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000038     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000039     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000040     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000041     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000042     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000043     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000044     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000045     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000046     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000047     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000048     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000049     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000050     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000051     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000052     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000053     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000054     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000055     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000056     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000057     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000058     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000059     0.0000002727      3.50      4.00      5.10
SRCPARAM L0000060     0.0000002727      3.50      4.00      5.10
```

```
   SRCPARAM L0000061     0.0000002727      3.50      4.00      5.10
   SRCPARAM L0000062     0.0000002727      3.50      4.00      5.10
   SRCPARAM L0000063     0.0000002727      3.50      4.00      5.10
   SRCPARAM L0000064     0.0000002727      3.50      4.00      5.10
   SRCPARAM L0000065     0.0000002727      3.50      4.00      5.10
   SRCPARAM L0000066     0.0000002727      3.50      4.00      5.10
** ------------------------------------------------------------------
** LINE VOLUME Source ID = SLINE2
   SRCPARAM L0000133     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000134     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000135     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000136     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000137     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000138     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000139     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000140     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000141     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000142     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000143     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000144     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000145     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000146     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000147     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000148     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000149     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000150     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000151     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000152     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000153     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000154     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000155     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000156     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000157     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000158     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000159     0.00000005786      3.50      4.00      1.63
   SRCPARAM L0000160     0.00000005786      3.50      4.00      1.63
** ------------------------------------------------------------------
** LINE VOLUME Source ID = SLINE3
   SRCPARAM L0000161     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000162     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000163     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000164     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000165     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000166     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000167     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000168     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000169     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000170     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000171     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000172     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000173     0.0000001156      3.50      4.00      1.63
```

```
SRCPARAM L0000174     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000175     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000176     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000177     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000178     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000179     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000180     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000181     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000182     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000183     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000184     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000185     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000186     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000187     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000188     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000189     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000190     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000191     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000192     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000193     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000194     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000195     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000196     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000197     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000198     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000199     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000200     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000201     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000202     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000203     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000204     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000205     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000206     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000207     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000208     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000209     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000210     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000211     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000212     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000213     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000214     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000215     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000216     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000217     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000218     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000219     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000220     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000221     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000222     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000223     0.0000001156      3.50      4.00      1.63
SRCPARAM L0000224     0.0000001156      3.50      4.00      1.63
```

```
   SRCPARAM L0000225     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000226     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000227     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000228     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000229     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000230     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000231     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000232     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000233     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000234     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000235     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000236     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000237     0.0000001156      3.50      4.00      1.63
   SRCPARAM L0000238     0.0000001156      3.50      4.00      1.63
** ------------------------------------------------------------------
   SRCPARAM PAREA1       1.1741E-09     0.914        14
   AREAVERT PAREA1       479547.338 3743092.751 479616.111 3743092.448
   AREAVERT PAREA1       479617.323 3743090.631 479629.442 3743090.631
   AREAVERT PAREA1       479629.442 3743090.025 479635.963 3743089.709
   AREAVERT PAREA1       479637.980 3743055.833 479636.098 3742875.967
   AREAVERT PAREA1       479635.425 3742866.557 479616.471 3742865.347
   AREAVERT PAREA1       479613.782 3742863.599 479530.974 3742864.675
   AREAVERT PAREA1       479530.974 3742911.725 479545.492 3742911.187

** Building Downwash **
   BUILDHGT STCK1          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK1          10.97    10.97    10.97     0.00     0.00     0.00
   BUILDHGT STCK1           0.00     0.00     0.00     0.00     0.00     0.00
   BUILDHGT STCK1          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK1          10.97    10.97    10.97     0.00     0.00     0.00
   BUILDHGT STCK1           0.00     0.00     0.00     0.00     0.00     0.00

   BUILDHGT STCK2           0.00     0.00     0.00     0.00     0.00     0.00
   BUILDHGT STCK2           0.00     0.00     0.00    10.97    10.97    10.97
   BUILDHGT STCK2          10.97    10.97    10.97    10.97    10.97     0.00
   BUILDHGT STCK2           0.00     0.00     0.00     0.00     0.00     0.00
   BUILDHGT STCK2           0.00     0.00     0.00    10.97    10.97    10.97
   BUILDHGT STCK2          10.97    10.97    10.97    10.97    10.97     0.00

   BUILDHGT STCK3           0.00     0.00    10.97    10.97    10.97    10.97
   BUILDHGT STCK3          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK3          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK3           0.00     0.00    10.97    10.97    10.97    10.97
   BUILDHGT STCK3          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK3          10.97    10.97    10.97    10.97    10.97    10.97

   BUILDHGT STCK4          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK4          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK4          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK4          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK4          10.97    10.97    10.97    10.97    10.97    10.97
```

```
BUILDHGT STCK4           10.97    10.97    10.97    10.97    10.97    10.97

BUILDHGT STCK5           10.97    10.97    10.97    10.97    10.97    10.97
BUILDHGT STCK5           10.97    10.97    10.97    10.97    10.97    10.97
BUILDHGT STCK5           10.97    10.97    10.97    10.97    10.97    10.97
BUILDHGT STCK5           10.97    10.97    10.97    10.97    10.97    10.97
BUILDHGT STCK5           10.97    10.97    10.97    10.97    10.97    10.97
BUILDHGT STCK5           10.97    10.97    10.97    10.97    10.97    10.97

BUILDHGT STCK6           10.97    10.97    10.97    10.97    10.97    10.97
BUILDHGT STCK6           10.97    10.97    10.97    10.97    10.97    10.97
BUILDHGT STCK6           10.97    10.97    10.97    10.97    10.97    10.97
BUILDHGT STCK6           10.97    10.97    10.97    10.97    10.97    10.97
BUILDHGT STCK6           10.97    10.97    10.97    10.97    10.97    10.97
BUILDHGT STCK6           10.97    10.97    10.97    10.97    10.97    10.97

BUILDWID STCK1          126.83   161.07   190.42   213.98   231.04   241.08
BUILDWID STCK1          243.80   239.11   229.94     0.00     0.00     0.00
BUILDWID STCK1            0.00     0.00     0.00     0.00     0.00     0.00
BUILDWID STCK1          126.83   161.07   190.42   213.98   231.04   241.08
BUILDWID STCK1          243.80   239.11   229.94     0.00     0.00     0.00
BUILDWID STCK1            0.00     0.00     0.00     0.00     0.00     0.00

BUILDWID STCK2            0.00     0.00     0.00     0.00     0.00     0.00
BUILDWID STCK2            0.00     0.00     0.00   240.65   247.69   247.71
BUILDWID STCK2          240.21   225.41   203.76   175.92   142.73     0.00
BUILDWID STCK2            0.00     0.00     0.00     0.00     0.00     0.00
BUILDWID STCK2            0.00     0.00     0.00   240.65   247.69   247.71
BUILDWID STCK2          240.21   225.41   203.76   175.92   142.73     0.00

BUILDWID STCK3            0.00     0.00   190.42   213.98   231.04   241.08
BUILDWID STCK3          243.80   239.11   229.94   240.65   247.69   247.71
BUILDWID STCK3          240.21   225.41   203.76   175.92   142.73   107.53
BUILDWID STCK3            0.00     0.00   190.42   213.98   231.04   241.08
BUILDWID STCK3          243.80   239.11   229.94   240.65   247.69   247.71
BUILDWID STCK3          240.21   225.41   203.76   175.92   142.73   107.53

BUILDWID STCK4          126.83   161.07   190.42   213.98   231.04   241.08
BUILDWID STCK4          243.80   239.11   229.94   240.65   247.69   247.71
BUILDWID STCK4          240.21   225.41   203.76   175.92   142.73   107.53
BUILDWID STCK4          126.83   161.07   190.42   213.98   231.04   241.08
BUILDWID STCK4          243.80   239.11   229.94   240.65   247.69   247.71
BUILDWID STCK4          240.21   225.41   203.76   175.92   142.73   107.53

BUILDWID STCK5          126.83   161.07   190.42   213.98   231.04   241.08
BUILDWID STCK5          243.80   239.11   229.94   240.65   247.69   247.71
BUILDWID STCK5          240.21   225.41   203.76   175.92   142.73   107.53
BUILDWID STCK5          126.83   161.07   190.42   213.98   231.04   241.08
BUILDWID STCK5          243.80   239.11   229.94   240.65   247.69   247.71
BUILDWID STCK5          240.21   225.41   203.76   175.92   142.73   107.53
```

```
BUILDWID STCK6          126.83   161.07   190.42   213.98   231.04   241.08
BUILDWID STCK6          243.80   239.11   229.94   240.65   247.69   247.71
BUILDWID STCK6          240.21   225.41   203.76   175.92   142.73   107.53
BUILDWID STCK6          126.83   161.07   190.42   213.98   231.04   241.08
BUILDWID STCK6          243.80   239.11   229.94   240.65   247.69   247.71
BUILDWID STCK6          240.21   225.41   203.76   175.92   142.73   107.53

BUILDLEN STCK1          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK1          175.92   142.73   107.53     0.00     0.00     0.00
BUILDLEN STCK1            0.00     0.00     0.00     0.00     0.00     0.00
BUILDLEN STCK1          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK1          175.92   142.73   107.53     0.00     0.00     0.00
BUILDLEN STCK1            0.00     0.00     0.00     0.00     0.00     0.00

BUILDLEN STCK2            0.00     0.00     0.00     0.00     0.00     0.00
BUILDLEN STCK2            0.00     0.00     0.00   126.83   161.07   190.42
BUILDLEN STCK2          213.98   231.04   241.08   243.80   239.11     0.00
BUILDLEN STCK2            0.00     0.00     0.00     0.00     0.00     0.00
BUILDLEN STCK2            0.00     0.00     0.00   126.83   161.07   190.42
BUILDLEN STCK2          213.98   231.04   241.08   243.80   239.11     0.00

BUILDLEN STCK3            0.00     0.00   247.71   240.21   225.41   203.76
BUILDLEN STCK3          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK3          213.98   231.04   241.08   243.80   239.11   229.94
BUILDLEN STCK3            0.00     0.00   247.71   240.21   225.41   203.76
BUILDLEN STCK3          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK3          213.98   231.04   241.08   243.80   239.11   229.94

BUILDLEN STCK4          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK4          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK4          213.98   231.04   241.08   243.80   239.11   229.94
BUILDLEN STCK4          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK4          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK4          213.98   231.04   241.08   243.80   239.11   229.94

BUILDLEN STCK5          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK5          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK5          213.98   231.04   241.08   243.80   239.11   229.94
BUILDLEN STCK5          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK5          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK5          213.98   231.04   241.08   243.80   239.11   229.94

BUILDLEN STCK6          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK6          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK6          213.98   231.04   241.08   243.80   239.11   229.94
BUILDLEN STCK6          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK6          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK6          213.98   231.04   241.08   243.80   239.11   229.94

XBADJ    STCK1         -250.34  -259.98  -261.73  -255.52  -241.55  -220.23
XBADJ    STCK1         -192.23  -158.39  -119.73     0.00     0.00     0.00
```

XBADJ	STCK1	0.00	0.00	0.00	0.00	0.00	0.00
XBADJ	STCK1	9.69	12.30	14.02	15.31	16.14	16.47
XBADJ	STCK1	16.31	15.65	12.20	0.00	0.00	0.00
XBADJ	STCK1	0.00	0.00	0.00	0.00	0.00	0.00
XBADJ	STCK2	0.00	0.00	0.00	0.00	0.00	0.00
XBADJ	STCK2	0.00	0.00	0.00	-141.66	-176.81	-206.59
XBADJ	STCK2	-230.09	-246.60	-255.62	-256.87	-250.32	0.00
XBADJ	STCK2	0.00	0.00	0.00	0.00	0.00	0.00
XBADJ	STCK2	0.00	0.00	0.00	14.83	15.74	16.17
XBADJ	STCK2	16.11	15.56	14.54	13.07	11.21	0.00
XBADJ	STCK3	0.00	0.00	-181.48	-160.88	-135.39	-105.79
XBADJ	STCK3	-72.97	-37.94	-1.75	10.31	6.27	2.04
XBADJ	STCK3	-2.25	-6.48	-10.51	-14.22	-17.49	-20.24
XBADJ	STCK3	0.00	0.00	-66.24	-79.33	-90.02	-97.97
XBADJ	STCK3	-102.95	-104.80	-105.78	-137.14	-167.34	-192.46
XBADJ	STCK3	-211.73	-224.56	-230.57	-229.58	-221.61	-209.70
XBADJ	STCK4	-154.23	-147.27	-135.84	-120.27	-101.05	-78.77
XBADJ	STCK4	-54.08	-27.76	-0.59	2.42	-10.43	-22.97
XBADJ	STCK4	-34.81	-45.59	-54.99	-62.71	-68.53	-72.27
XBADJ	STCK4	-86.42	-100.41	-111.88	-119.94	-124.35	-124.99
XBADJ	STCK4	-121.83	-114.97	-106.94	-129.25	-150.63	-167.45
XBADJ	STCK4	-179.17	-185.45	-186.10	-181.09	-170.57	-157.67
XBADJ	STCK5	-111.37	-106.04	-97.49	-85.98	-71.86	-55.56
XBADJ	STCK5	-37.56	-18.43	1.27	-3.25	-23.46	-42.96
XBADJ	STCK5	-61.15	-77.49	-91.47	-102.67	-110.75	-115.47
XBADJ	STCK5	-129.29	-141.65	-150.22	-154.23	-153.55	-148.20
XBADJ	STCK5	-138.36	-124.31	-108.80	-123.58	-137.61	-147.46
XBADJ	STCK5	-152.83	-153.55	-149.61	-141.13	-128.35	-114.47
XBADJ	STCK6	-65.51	-62.41	-57.41	-50.67	-42.39	-32.82
XBADJ	STCK6	-22.25	-11.01	0.57	-12.05	-40.09	-66.91
XBADJ	STCK6	-91.70	-113.71	-132.25	-146.79	-156.86	-162.16
XBADJ	STCK6	-175.14	-185.28	-190.30	-189.54	-183.02	-170.94
XBADJ	STCK6	-153.67	-131.73	-108.10	-114.78	-120.98	-123.51
XBADJ	STCK6	-122.28	-117.34	-108.83	-97.01	-82.25	-67.78
YBADJ	STCK1	38.20	15.66	-7.35	-30.14	-52.01	-72.30
YBADJ	STCK1	-90.40	-105.75	-119.28	0.00	0.00	0.00
YBADJ	STCK1	0.00	0.00	0.00	0.00	0.00	0.00
YBADJ	STCK1	-38.20	-15.66	7.35	30.14	52.01	72.30
YBADJ	STCK1	90.40	105.75	119.28	0.00	0.00	0.00
YBADJ	STCK1	0.00	0.00	0.00	0.00	0.00	0.00
YBADJ	STCK2	0.00	0.00	0.00	0.00	0.00	0.00
YBADJ	STCK2	0.00	0.00	0.00	107.11	90.42	71.25
YBADJ	STCK2	49.92	27.06	3.39	-20.39	-43.55	0.00
YBADJ	STCK2	0.00	0.00	0.00	0.00	0.00	0.00

```
   YBADJ    STCK2            0.00     0.00     0.00  -107.11   -90.42   -71.25
   YBADJ    STCK2          -49.92   -27.06    -3.39    20.39    43.55     0.00

   YBADJ    STCK3            0.00     0.00   -97.25  -104.74  -109.04  -110.03
   YBADJ    STCK3         -107.68  -102.06   -94.73   -85.35   -72.72   -57.62
   YBADJ    STCK3          -40.77   -22.68    -3.91    14.99    33.43    52.02
   YBADJ    STCK3            0.00     0.00    97.25   104.74   109.04   110.03
   YBADJ    STCK3          107.68   102.06    94.73    85.35    72.72    57.62
   YBADJ    STCK3           40.77    22.68     3.91   -14.99   -33.43   -52.02

   YBADJ    STCK4          -65.83   -70.10   -72.24   -72.18   -69.93   -65.55
   YBADJ    STCK4          -59.19   -51.02   -42.70   -33.91   -23.43   -11.98
   YBADJ    STCK4           -0.17    11.65    23.11    33.88    43.61    53.18
   YBADJ    STCK4           65.83    70.10    72.24    72.18    69.93    65.55
   YBADJ    STCK4           59.19    51.02    42.70    33.91    23.43    11.98
   YBADJ    STCK4            0.17   -11.65   -23.11   -33.88   -43.61   -53.18

   YBADJ    STCK5          -60.16   -57.07   -52.25   -45.84   -38.03   -29.07
   YBADJ    STCK5          -19.23    -8.80     0.50     8.96    17.80    26.36
   YBADJ    STCK5           34.12    40.84    46.32    50.40    52.94    55.03
   YBADJ    STCK5           60.16    57.07    52.25    45.84    38.03    29.07
   YBADJ    STCK5           19.23     8.80    -0.50    -8.96   -17.80   -26.36
   YBADJ    STCK5          -34.12   -40.84   -46.32   -50.40   -52.94   -55.03

   YBADJ    STCK6          -51.37   -40.45   -28.30   -15.29    -1.82    11.71
   YBADJ    STCK6           24.89    37.30    47.19    54.82    61.44    66.45
   YBADJ    STCK6           69.44    70.32    69.06    65.71    60.36    54.33
   YBADJ    STCK6           51.37    40.45    28.30    15.29     1.81   -11.71
   YBADJ    STCK6          -24.89   -37.30   -47.19   -54.82   -61.44   -66.45
   YBADJ    STCK6          -69.44   -70.32   -69.06   -65.71   -60.36   -54.33

   URBANSRC ALL
   SRCGROUP ALL
SO FINISHED
**
**************************************
** AERMOD Receptor Pathway
**************************************
**
**
RE STARTING
   INCLUDED "19370 Redlands Avenue West OY.rou"
RE FINISHED
**
**************************************
** AERMOD Meteorology Pathway
**************************************
**
**
ME STARTING
   SURFFILE "E:\New MET data\PERI_V9_ADJU\PERI_v9.SFC"
```

```
   PROFFILE "E:\New MET data\PERI_V9_ADJU\PERI_v9.PFL"
   SURFDATA 3171 2010
   UAIRDATA 3190 2010
   SITEDATA 99999 2010
   PROFBASE 442.0 METERS
ME FINISHED
**
**************************************
** AERMOD Output Pathway
**************************************
**
**
OU STARTING
** Auto-Generated Plotfiles
   PLOTFILE PERIOD ALL "19370 Redlands Avenue West OY.AD\PE00GALL.PLT" 31
   SUMMFILE "19370 Redlands Avenue West OY.sum"
OU FINISHED


  *** Message Summary For AERMOD Model Setup ***

  --------- Summary of Total Messages --------

 A Total of            0 Fatal Error Message(s)
 A Total of            8 Warning Message(s)
 A Total of            0 Informational Message(s)


    ******** FATAL ERROR MESSAGES ********
              ***  NONE  ***


    ********   WARNING MESSAGES   ********
 SO W320     290        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
 SO W320     291        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
 SO W320     292        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
 SO W320     293        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
 SO W320     294        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
 SO W320     295        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
 ME W186     719       MEOPEN: THRESH_1MIN 1-min ASOS wind speed threshold used          0.50
 ME W187     719       MEOPEN: ADJ_U* Option for Stable Low Winds used in AERMET

 ***********************************
 *** SETUP Finishes Successfully ***
 ***********************************


 *** AERMOD - VERSION 22112  ***   *** 19370 Redlands Avenue West  - new site plan                      ***        04/04/23
 *** AERMET - VERSION  16216 ***   *** DPM Conc 2023 OY                                                ***        18:16:30
                                                                                                                 PAGE   1
 *** MODELOPTs:    RegDFAULT  CONC  ELEV  URBAN  ADJ_U*
```

```
                                        ***     MODEL SETUP OPTIONS SUMMARY       ***
- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - -

** Model Options Selected:
     * Model Uses Regulatory DEFAULT Options
     * Model Is Setup For Calculation of Average CONCentration Values.
     * NO GAS DEPOSITION Data Provided.
     * NO PARTICLE DEPOSITION Data Provided.
     * Model Uses NO DRY DEPLETION. DDPLETE  =  F
     * Model Uses NO WET DEPLETION. WETDPLT  =  F
     * Stack-tip Downwash.
     * Model Accounts for ELEVated Terrain Effects.
     * Use Calms Processing Routine.
     * Use Missing Data Processing Routine.
     * No Exponential Decay.
     * Model Uses URBAN Dispersion Algorithm for the SBL for   179 Source(s),
       for Total of    1 Urban Area(s):
  Urban Population =   2189641.0 ;  Urban Roughness Length =  1.000 m
     * Urban Roughness Length of 1.0 Meter Used.
     * ADJ_U*   - Use ADJ_U* option for SBL in AERMET
     * CCVR_Sub - Meteorological data includes CCVR substitutions
     * TEMP_Sub - Meteorological data includes TEMP substitutions
     * Model Assumes No FLAGPOLE Receptor Heights.
     * The User Specified a Pollutant Type of: DPM

**Model Calculates PERIOD Averages Only

**This Run Includes:    179 Source(s);       1 Source Group(s); and     449 Receptor(s)

               with:      6 POINT(s), including
                          0 POINTCAP(s) and      0 POINTHOR(s)
                and:    172 VOLUME source(s)
                and:      1 AREA type source(s)
                and:      0 LINE source(s)
                and:      0 RLINE/RLINEXT source(s)
                and:      0 OPENPIT source(s)
                and:      0 BUOYANT LINE source(s) with a total of     0 line(s)
                and:      0 SWPOINT source(s)


**Model Set To Continue RUNning After the Setup Testing.

**The AERMET Input Meteorological Data Version Date:  16216

**Output Options Selected:
         Model Outputs Tables of PERIOD Averages by Receptor
         Model Outputs External File(s) of High Values for Plotting (PLOTFILE Keyword)
         Model Outputs Separate Summary File of High Ranked Values (SUMMFILE Keyword)

**NOTE:  The Following Flags May Appear Following CONC Values:  c for Calm Hours
```

```
                                                    m for Missing Hours
                                                    b for Both Calm and Missing Hours

**Misc. Inputs:  Base Elev. for Pot. Temp. Profile (m MSL) =   442.00 ;  Decay Coef. =    0.000     ;  Rot. Angle =     0.0
                 Emission Units = GRAMS/SEC                             ;  Emission Rate Unit Factor =   0.10000E+07
                 Output Units   = MICROGRAMS/M**3

**Approximate Storage Requirements of Model =      3.9 MB of RAM.

**Input Runstream File:          aermod.inp
**Output Print File:             aermod.out

**Detailed Error/Message File:   19370 Redlands Avenue West OY.err
**File for Summary of Results:   19370 Redlands Avenue West OY.sum

*** AERMOD - VERSION 22112  ***   *** 19370 Redlands Avenue West  - new site plan                      ***        04/04/23
*** AERMET - VERSION  16216 ***   *** DPM Conc 2023 OY                                               ***        18:16:30
                                                                                                                PAGE   2
*** MODELOPTs:    RegDFAULT  CONC  ELEV  URBAN  ADJ_U*


                                          *** POINT SOURCE DATA ***

             NUMBER EMISSION RATE                   BASE     STACK   STACK    STACK     STACK    BLDG   URBAN  CAP/  EMIS RATE
  SOURCE      PART.  (GRAMS/SEC)     X        Y      ELEV.    HEIGHT  TEMP.   EXIT VEL. DIAMETER  EXISTS SOURCE HOR   SCALAR
    ID        CATS.               (METERS) (METERS) (METERS) (METERS) (DEG.K)  (M/SEC)  (METERS)                       VARY BY
- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - -

STCK1           0   0.12400E-04  479650.5 3743097.5   441.2     3.50   366.00    51.82     0.10    YES     YES   NO
STCK2           0   0.12400E-04  479648.8 3742857.1   441.1     3.50   366.00    51.82     0.10    YES     YES   NO
STCK3           0   0.12400E-04  479532.5 3743073.0   441.9     3.50   366.00    51.82     0.10    YES     YES   NO
STCK4           0   0.12400E-04  479531.4 3743021.0   441.8     3.50   366.00    51.82     0.10    YES     YES   NO
STCK5           0   0.12400E-04  479529.5 3742977.7   441.7     3.50   366.00    51.82     0.10    YES     YES   NO
STCK6           0   0.12400E-04  479530.2 3742931.1   441.7     3.50   366.00    51.82     0.10    YES     YES   NO

*** AERMOD - VERSION 22112  ***   *** 19370 Redlands Avenue West  - new site plan                      ***        04/04/23
*** AERMET - VERSION  16216 ***   *** DPM Conc 2023 OY                                               ***        18:16:30
                                                                                                                PAGE   3
*** MODELOPTs:    RegDFAULT  CONC  ELEV  URBAN  ADJ_U*


                                          *** VOLUME SOURCE DATA ***

             NUMBER EMISSION RATE                   BASE    RELEASE    INIT.    INIT.   URBAN  EMISSION RATE
  SOURCE      PART.  (GRAMS/SEC)     X        Y      ELEV.   HEIGHT      SY       SZ     SOURCE  SCALAR VARY
    ID        CATS.               (METERS) (METERS) (METERS) (METERS) (METERS) (METERS)             BY
- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - -

L0000001        0   0.27270E-06  479655.4 3742857.0   441.1     3.50     4.00     5.10     YES
L0000002        0   0.27270E-06  479646.8 3742856.1   441.1     3.50     4.00     5.10     YES
L0000003        0   0.27270E-06  479638.3 3742855.3   441.1     3.50     4.00     5.10     YES
```

```
L0000004         0   0.27270E-06  479629.7 3742854.8   441.1     3.50     4.00     5.10     YES
L0000005         0   0.27270E-06  479621.1 3742854.9   441.1     3.50     4.00     5.10     YES
L0000006         0   0.27270E-06  479612.5 3742855.0   441.1     3.50     4.00     5.10     YES
L0000007         0   0.27270E-06  479603.9 3742855.1   441.2     3.50     4.00     5.10     YES
L0000008         0   0.27270E-06  479595.4 3742855.2   441.3     3.50     4.00     5.10     YES
L0000009         0   0.27270E-06  479586.8 3742855.3   441.4     3.50     4.00     5.10     YES
L0000010         0   0.27270E-06  479578.2 3742855.4   441.6     3.50     4.00     5.10     YES
L0000011         0   0.27270E-06  479569.6 3742855.5   441.7     3.50     4.00     5.10     YES
L0000012         0   0.27270E-06  479561.0 3742855.6   441.7     3.50     4.00     5.10     YES
L0000013         0   0.27270E-06  479552.4 3742855.7   441.8     3.50     4.00     5.10     YES
L0000014         0   0.27270E-06  479543.8 3742855.8   441.8     3.50     4.00     5.10     YES
L0000015         0   0.27270E-06  479535.2 3742855.9   441.8     3.50     4.00     5.10     YES
L0000016         0   0.27270E-06  479526.7 3742856.6   441.8     3.50     4.00     5.10     YES
L0000017         0   0.27270E-06  479519.7 3742859.9   441.8     3.50     4.00     5.10     YES
L0000018         0   0.27270E-06  479516.1 3742867.7   441.8     3.50     4.00     5.10     YES
L0000019         0   0.27270E-06  479512.5 3742875.5   441.9     3.50     4.00     5.10     YES
L0000020         0   0.27270E-06  479508.9 3742883.3   441.9     3.50     4.00     5.10     YES
L0000021         0   0.27270E-06  479505.4 3742891.1   441.8     3.50     4.00     5.10     YES
L0000022         0   0.27270E-06  479501.8 3742898.9   441.8     3.50     4.00     5.10     YES
L0000023         0   0.27270E-06  479498.2 3742906.7   441.8     3.50     4.00     5.10     YES
L0000024         0   0.27270E-06  479494.6 3742914.5   441.8     3.50     4.00     5.10     YES
L0000025         0   0.27270E-06  479491.0 3742922.3   441.8     3.50     4.00     5.10     YES
L0000026         0   0.27270E-06  479487.4 3742930.1   441.9     3.50     4.00     5.10     YES
L0000027         0   0.27270E-06  479483.8 3742937.9   441.9     3.50     4.00     5.10     YES
L0000028         0   0.27270E-06  479480.2 3742945.7   442.0     3.50     4.00     5.10     YES
L0000029         0   0.27270E-06  479476.6 3742953.5   442.0     3.50     4.00     5.10     YES
L0000030         0   0.27270E-06  479473.0 3742961.3   442.0     3.50     4.00     5.10     YES
L0000031         0   0.27270E-06  479470.0 3742969.4   441.9     3.50     4.00     5.10     YES
L0000032         0   0.27270E-06  479467.0 3742977.4   441.9     3.50     4.00     5.10     YES
L0000033         0   0.27270E-06  479464.1 3742985.5   442.0     3.50     4.00     5.10     YES
L0000034         0   0.27270E-06  479461.1 3742993.5   442.0     3.50     4.00     5.10     YES
L0000035         0   0.27270E-06  479458.9 3743001.7   442.0     3.50     4.00     5.10     YES
L0000036         0   0.27270E-06  479459.4 3743010.3   442.1     3.50     4.00     5.10     YES
L0000037         0   0.27270E-06  479459.9 3743018.9   442.1     3.50     4.00     5.10     YES
L0000038         0   0.27270E-06  479460.4 3743027.5   442.2     3.50     4.00     5.10     YES
L0000039         0   0.27270E-06  479460.9 3743036.0   442.2     3.50     4.00     5.10     YES
L0000040         0   0.27270E-06  479462.4 3743044.4   442.1     3.50     4.00     5.10     YES
```



```
*** MODELOPTs:    RegDFAULT  CONC  ELEV  URBAN  ADJ_U*
```

*** VOLUME SOURCE DATA ***

SOURCE ID	NUMBER PART. CATS.	EMISSION RATE (GRAMS/SEC)	X (METERS)	Y (METERS)	BASE ELEV. (METERS)	RELEASE HEIGHT (METERS)	INIT. SY (METERS)	INIT. SZ (METERS)	URBAN SOURCE	EMISSION RATE SCALAR VARY BY

L0000041	0	0.27270E-06	479464.7	3743052.7	442.1	3.50	4.00	5.10	YES
L0000042	0	0.27270E-06	479467.0	3743061.0	442.0	3.50	4.00	5.10	YES
L0000043	0	0.27270E-06	479469.4	3743069.3	441.9	3.50	4.00	5.10	YES
L0000044	0	0.27270E-06	479474.3	3743075.5	441.9	3.50	4.00	5.10	YES
L0000045	0	0.27270E-06	479481.7	3743079.7	441.9	3.50	4.00	5.10	YES
L0000046	0	0.27270E-06	479489.2	3743084.0	441.9	3.50	4.00	5.10	YES
L0000047	0	0.27270E-06	479496.7	3743088.2	441.8	3.50	4.00	5.10	YES
L0000048	0	0.27270E-06	479504.2	3743092.4	441.7	3.50	4.00	5.10	YES
L0000049	0	0.27270E-06	479512.1	3743095.3	441.7	3.50	4.00	5.10	YES
L0000050	0	0.27270E-06	479520.6	3743096.6	441.6	3.50	4.00	5.10	YES
L0000051	0	0.27270E-06	479529.1	3743097.9	441.6	3.50	4.00	5.10	YES
L0000052	0	0.27270E-06	479537.6	3743099.3	441.5	3.50	4.00	5.10	YES
L0000053	0	0.27270E-06	479546.1	3743100.6	441.4	3.50	4.00	5.10	YES
L0000054	0	0.27270E-06	479554.6	3743100.9	441.4	3.50	4.00	5.10	YES
L0000055	0	0.27270E-06	479563.2	3743100.8	441.4	3.50	4.00	5.10	YES
L0000056	0	0.27270E-06	479571.8	3743100.7	441.3	3.50	4.00	5.10	YES
L0000057	0	0.27270E-06	479580.4	3743100.6	441.3	3.50	4.00	5.10	YES
L0000058	0	0.27270E-06	479589.0	3743100.5	441.3	3.50	4.00	5.10	YES
L0000059	0	0.27270E-06	479597.6	3743100.4	441.2	3.50	4.00	5.10	YES
L0000060	0	0.27270E-06	479606.2	3743100.3	441.2	3.50	4.00	5.10	YES
L0000061	0	0.27270E-06	479614.8	3743100.1	441.2	3.50	4.00	5.10	YES
L0000062	0	0.27270E-06	479623.3	3743100.0	441.2	3.50	4.00	5.10	YES
L0000063	0	0.27270E-06	479631.9	3743099.9	441.2	3.50	4.00	5.10	YES
L0000064	0	0.27270E-06	479640.5	3743099.8	441.2	3.50	4.00	5.10	YES
L0000065	0	0.27270E-06	479649.1	3743099.7	441.2	3.50	4.00	5.10	YES
L0000066	0	0.27270E-06	479657.7	3743099.6	441.2	3.50	4.00	5.10	YES
L0000133	0	0.57860E-07	479669.0	3742861.9	441.1	3.50	4.00	1.63	YES
L0000134	0	0.57860E-07	479669.8	3742870.4	441.1	3.50	4.00	1.63	YES
L0000135	0	0.57860E-07	479670.3	3742879.0	441.1	3.50	4.00	1.63	YES
L0000136	0	0.57860E-07	479670.3	3742887.6	441.1	3.50	4.00	1.63	YES
L0000137	0	0.57860E-07	479670.3	3742896.2	441.1	3.50	4.00	1.63	YES
L0000138	0	0.57860E-07	479670.3	3742904.8	441.1	3.50	4.00	1.63	YES
L0000139	0	0.57860E-07	479670.3	3742913.4	441.1	3.50	4.00	1.63	YES
L0000140	0	0.57860E-07	479670.3	3742921.9	441.1	3.50	4.00	1.63	YES
L0000141	0	0.57860E-07	479670.3	3742930.5	441.1	3.50	4.00	1.63	YES
L0000142	0	0.57860E-07	479670.3	3742939.1	441.0	3.50	4.00	1.63	YES
L0000143	0	0.57860E-07	479670.3	3742947.7	441.0	3.50	4.00	1.63	YES
L0000144	0	0.57860E-07	479670.3	3742956.3	441.0	3.50	4.00	1.63	YES
L0000145	0	0.57860E-07	479670.3	3742964.9	441.0	3.50	4.00	1.63	YES
L0000146	0	0.57860E-07	479670.3	3742973.5	441.0	3.50	4.00	1.63	YES

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** VOLUME SOURCE DATA ***

SOURCE	NUMBER PART.	EMISSION RATE (GRAMS/SEC)	X	Y	BASE ELEV.	RELEASE HEIGHT	INIT. SY	INIT. SZ	URBAN SOURCE	EMISSION RATE SCALAR VARY

ID	CATS.		(METERS)	(METERS)	(METERS)	(METERS)	(METERS)	(METERS)	BY
L0000147	0	0.57860E-07	479670.3	3742982.1	441.1	3.50	4.00	1.63	YES
L0000148	0	0.57860E-07	479670.3	3742990.7	441.1	3.50	4.00	1.63	YES
L0000149	0	0.57860E-07	479670.3	3742999.3	441.1	3.50	4.00	1.63	YES
L0000150	0	0.57860E-07	479670.3	3743007.9	441.2	3.50	4.00	1.63	YES
L0000151	0	0.57860E-07	479670.3	3743016.4	441.2	3.50	4.00	1.63	YES
L0000152	0	0.57860E-07	479670.3	3743025.0	441.2	3.50	4.00	1.63	YES
L0000153	0	0.57860E-07	479670.3	3743033.6	441.3	3.50	4.00	1.63	YES
L0000154	0	0.57860E-07	479670.3	3743042.2	441.3	3.50	4.00	1.63	YES
L0000155	0	0.57860E-07	479670.3	3743050.8	441.3	3.50	4.00	1.63	YES
L0000156	0	0.57860E-07	479670.3	3743059.4	441.4	3.50	4.00	1.63	YES
L0000157	0	0.57860E-07	479670.3	3743068.0	441.4	3.50	4.00	1.63	YES
L0000158	0	0.57860E-07	479670.3	3743076.6	441.3	3.50	4.00	1.63	YES
L0000159	0	0.57860E-07	479670.3	3743085.2	441.3	3.50	4.00	1.63	YES
L0000160	0	0.57860E-07	479670.3	3743093.8	441.2	3.50	4.00	1.63	YES
L0000161	0	0.11560E-06	479670.0	3743107.7	440.9	3.50	4.00	1.63	YES
L0000162	0	0.11560E-06	479669.8	3743116.3	440.6	3.50	4.00	1.63	YES
L0000163	0	0.11560E-06	479669.6	3743124.9	440.3	3.50	4.00	1.63	YES
L0000164	0	0.11560E-06	479669.4	3743133.5	440.3	3.50	4.00	1.63	YES
L0000165	0	0.11560E-06	479669.2	3743142.1	440.5	3.50	4.00	1.63	YES
L0000166	0	0.11560E-06	479669.0	3743150.7	440.8	3.50	4.00	1.63	YES
L0000167	0	0.11560E-06	479668.8	3743159.3	441.0	3.50	4.00	1.63	YES
L0000168	0	0.11560E-06	479668.6	3743167.8	441.0	3.50	4.00	1.63	YES
L0000169	0	0.11560E-06	479668.3	3743176.4	441.0	3.50	4.00	1.63	YES
L0000170	0	0.11560E-06	479668.1	3743185.0	441.0	3.50	4.00	1.63	YES
L0000171	0	0.11560E-06	479667.9	3743193.6	441.1	3.50	4.00	1.63	YES
L0000172	0	0.11560E-06	479667.7	3743202.2	441.2	3.50	4.00	1.63	YES
L0000173	0	0.11560E-06	479667.5	3743210.8	441.2	3.50	4.00	1.63	YES
L0000174	0	0.11560E-06	479667.3	3743219.4	441.3	3.50	4.00	1.63	YES
L0000175	0	0.11560E-06	479667.1	3743228.0	441.3	3.50	4.00	1.63	YES
L0000176	0	0.11560E-06	479666.9	3743236.5	441.3	3.50	4.00	1.63	YES
L0000177	0	0.11560E-06	479666.7	3743245.1	441.3	3.50	4.00	1.63	YES
L0000178	0	0.11560E-06	479666.5	3743253.7	441.3	3.50	4.00	1.63	YES
L0000179	0	0.11560E-06	479666.4	3743262.3	441.2	3.50	4.00	1.63	YES
L0000180	0	0.11560E-06	479666.3	3743270.9	441.2	3.50	4.00	1.63	YES
L0000181	0	0.11560E-06	479666.2	3743279.5	441.1	3.50	4.00	1.63	YES
L0000182	0	0.11560E-06	479666.1	3743288.1	441.0	3.50	4.00	1.63	YES
L0000183	0	0.11560E-06	479666.0	3743296.7	440.8	3.50	4.00	1.63	YES
L0000184	0	0.11560E-06	479665.9	3743305.3	440.7	3.50	4.00	1.63	YES
L0000185	0	0.11560E-06	479665.8	3743313.9	440.6	3.50	4.00	1.63	YES
L0000186	0	0.11560E-06	479665.7	3743322.4	440.6	3.50	4.00	1.63	YES

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** VOLUME SOURCE DATA ***

SOURCE ID	NUMBER PART. CATS.	EMISSION RATE (GRAMS/SEC)	X (METERS)	Y (METERS)	BASE ELEV. (METERS)	RELEASE HEIGHT (METERS)	INIT. SY (METERS)	INIT. SZ (METERS)	URBAN SOURCE	EMISSION RATE SCALAR VARY BY
L0000187	0	0.11560E-06	479665.6	3743331.0	440.7	3.50	4.00	1.63	YES	
L0000188	0	0.11560E-06	479666.0	3743339.6	440.7	3.50	4.00	1.63	YES	
L0000189	0	0.11560E-06	479666.3	3743348.2	440.7	3.50	4.00	1.63	YES	
L0000190	0	0.11560E-06	479666.6	3743356.8	440.7	3.50	4.00	1.63	YES	
L0000191	0	0.11560E-06	479666.9	3743365.4	440.6	3.50	4.00	1.63	YES	
L0000192	0	0.11560E-06	479667.2	3743374.0	440.6	3.50	4.00	1.63	YES	
L0000193	0	0.11560E-06	479667.5	3743382.5	440.4	3.50	4.00	1.63	YES	
L0000194	0	0.11560E-06	479668.7	3743391.0	440.2	3.50	4.00	1.63	YES	
L0000195	0	0.11560E-06	479670.3	3743399.5	440.0	3.50	4.00	1.63	YES	
L0000196	0	0.11560E-06	479671.8	3743407.9	439.8	3.50	4.00	1.63	YES	
L0000197	0	0.11560E-06	479673.3	3743416.4	439.7	3.50	4.00	1.63	YES	
L0000198	0	0.11560E-06	479675.4	3743424.7	439.6	3.50	4.00	1.63	YES	
L0000199	0	0.11560E-06	479677.6	3743433.0	439.5	3.50	4.00	1.63	YES	
L0000200	0	0.11560E-06	479679.8	3743441.3	439.6	3.50	4.00	1.63	YES	
L0000201	0	0.11560E-06	479682.0	3743449.6	439.8	3.50	4.00	1.63	YES	
L0000202	0	0.11560E-06	479684.2	3743457.9	440.1	3.50	4.00	1.63	YES	
L0000203	0	0.11560E-06	479686.4	3743466.2	440.3	3.50	4.00	1.63	YES	
L0000204	0	0.11560E-06	479688.0	3743474.7	440.4	3.50	4.00	1.63	YES	
L0000205	0	0.11560E-06	479689.5	3743483.1	440.4	3.50	4.00	1.63	YES	
L0000206	0	0.11560E-06	479691.0	3743491.6	440.5	3.50	4.00	1.63	YES	
L0000207	0	0.11560E-06	479692.4	3743500.1	440.5	3.50	4.00	1.63	YES	
L0000208	0	0.11560E-06	479693.8	3743508.5	440.5	3.50	4.00	1.63	YES	
L0000209	0	0.11560E-06	479694.8	3743517.1	440.5	3.50	4.00	1.63	YES	
L0000210	0	0.11560E-06	479695.8	3743525.6	440.4	3.50	4.00	1.63	YES	
L0000211	0	0.11560E-06	479696.7	3743534.2	440.4	3.50	4.00	1.63	YES	
L0000212	0	0.11560E-06	479697.7	3743542.7	440.3	3.50	4.00	1.63	YES	
L0000213	0	0.11560E-06	479698.7	3743551.2	440.2	3.50	4.00	1.63	YES	
L0000214	0	0.11560E-06	479699.0	3743559.8	440.2	3.50	4.00	1.63	YES	
L0000215	0	0.11560E-06	479699.3	3743568.4	440.1	3.50	4.00	1.63	YES	
L0000216	0	0.11560E-06	479699.6	3743577.0	440.1	3.50	4.00	1.63	YES	
L0000217	0	0.11560E-06	479699.9	3743585.6	440.1	3.50	4.00	1.63	YES	
L0000218	0	0.11560E-06	479700.2	3743594.2	440.0	3.50	4.00	1.63	YES	
L0000219	0	0.11560E-06	479700.5	3743602.7	439.8	3.50	4.00	1.63	YES	
L0000220	0	0.11560E-06	479700.7	3743611.3	439.7	3.50	4.00	1.63	YES	
L0000221	0	0.11560E-06	479700.6	3743619.9	439.5	3.50	4.00	1.63	YES	
L0000222	0	0.11560E-06	479700.6	3743628.5	439.4	3.50	4.00	1.63	YES	
L0000223	0	0.11560E-06	479700.5	3743637.1	439.4	3.50	4.00	1.63	YES	
L0000224	0	0.11560E-06	479700.5	3743645.7	439.4	3.50	4.00	1.63	YES	
L0000225	0	0.11560E-06	479700.4	3743654.3	439.5	3.50	4.00	1.63	YES	
L0000226	0	0.11560E-06	479700.4	3743662.9	439.9	3.50	4.00	1.63	YES	

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** VOLUME SOURCE DATA ***

SOURCE ID	NUMBER PART. CATS.	EMISSION RATE (GRAMS/SEC)	X (METERS)	Y (METERS)	BASE ELEV. (METERS)	RELEASE HEIGHT (METERS)	INIT. SY (METERS)	INIT. SZ (METERS)	URBAN SOURCE	EMISSION RATE SCALAR VARY BY
L0000227	0	0.11560E-06	479700.3	3743671.5	440.2	3.50	4.00	1.63	YES	
L0000228	0	0.11560E-06	479700.3	3743680.0	440.6	3.50	4.00	1.63	YES	
L0000229	0	0.11560E-06	479700.2	3743688.6	440.7	3.50	4.00	1.63	YES	
L0000230	0	0.11560E-06	479700.1	3743697.2	440.7	3.50	4.00	1.63	YES	
L0000231	0	0.11560E-06	479700.1	3743705.8	440.7	3.50	4.00	1.63	YES	
L0000232	0	0.11560E-06	479700.0	3743714.4	440.7	3.50	4.00	1.63	YES	
L0000233	0	0.11560E-06	479700.0	3743723.0	440.6	3.50	4.00	1.63	YES	
L0000234	0	0.11560E-06	479699.9	3743731.6	440.4	3.50	4.00	1.63	YES	
L0000235	0	0.11560E-06	479699.9	3743740.2	440.3	3.50	4.00	1.63	YES	
L0000236	0	0.11560E-06	479699.8	3743748.8	440.3	3.50	4.00	1.63	YES	
L0000237	0	0.11560E-06	479699.8	3743757.4	440.4	3.50	4.00	1.63	YES	
L0000238	0	0.11560E-06	479699.7	3743766.0	440.6	3.50	4.00	1.63	YES	

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** AREAPOLY SOURCE DATA ***

SOURCE ID	NUMBER PART. CATS.	EMISSION RATE (GRAMS/SEC /METER**2)	LOCATION OF AREA X (METERS)	Y (METERS)	BASE ELEV. (METERS)	RELEASE HEIGHT (METERS)	NUMBER OF VERTS.	INIT. SZ (METERS)	URBAN SOURCE	EMISSION RATE SCALAR VARY BY
PAREA1	0	0.11741E-08	479547.3	3743092.8	441.6	0.91	14	0.00	YES	

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** SOURCE IDs DEFINING SOURCE GROUPS ***

SRCGROUP ID	SOURCE IDs
ALL	STCK1 , STCK2 , STCK3 , STCK4 , STCK5 , STCK6 , L0000001 , L0000002 ,

```
            L0000003    , L0000004    , L0000005    , L0000006    , L0000007    , L0000008    , L0000009    , L0000010    ,
            L0000011    , L0000012    , L0000013    , L0000014    , L0000015    , L0000016    , L0000017    , L0000018    ,
            L0000019    , L0000020    , L0000021    , L0000022    , L0000023    , L0000024    , L0000025    , L0000026    ,
            L0000027    , L0000028    , L0000029    , L0000030    , L0000031    , L0000032    , L0000033    , L0000034    ,
            L0000035    , L0000036    , L0000037    , L0000038    , L0000039    , L0000040    , L0000041    , L0000042    ,
            L0000043    , L0000044    , L0000045    , L0000046    , L0000047    , L0000048    , L0000049    , L0000050    ,
            L0000051    , L0000052    , L0000053    , L0000054    , L0000055    , L0000056    , L0000057    , L0000058    ,
            L0000059    , L0000060    , L0000061    , L0000062    , L0000063    , L0000064    , L0000065    , L0000066    ,
            L0000133    , L0000134    , L0000135    , L0000136    , L0000137    , L0000138    , L0000139    , L0000140    ,
            L0000141    , L0000142    , L0000143    , L0000144    , L0000145    , L0000146    , L0000147    , L0000148    ,
            L0000149    , L0000150    , L0000151    , L0000152    , L0000153    , L0000154    , L0000155    , L0000156    ,
            L0000157    , L0000158    , L0000159    , L0000160    , L0000161    , L0000162    , L0000163    , L0000164    ,
            L0000165    , L0000166    , L0000167    , L0000168    , L0000169    , L0000170    , L0000171    , L0000172    ,
            L0000173    , L0000174    , L0000175    , L0000176    , L0000177    , L0000178    , L0000179    , L0000180    ,
            L0000181    , L0000182    , L0000183    , L0000184    , L0000185    , L0000186    , L0000187    , L0000188    ,
            L0000189    , L0000190    , L0000191    , L0000192    , L0000193    , L0000194    , L0000195    , L0000196    ,
            L0000197    , L0000198    , L0000199    , L0000200    , L0000201    , L0000202    , L0000203    , L0000204    ,
            L0000205    , L0000206    , L0000207    , L0000208    , L0000209    , L0000210    , L0000211    , L0000212    ,
            L0000213    , L0000214    , L0000215    , L0000216    , L0000217    , L0000218    , L0000219    , L0000220    ,
```


*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** SOURCE IDs DEFINING SOURCE GROUPS ***

SRCGROUP ID	SOURCE IDs
	L0000221 , L0000222 , L0000223 , L0000224 , L0000225 , L0000226 , L0000227 , L0000228 ,

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** SOURCE IDs DEFINED AS URBAN SOURCES ***

URBAN ID	URBAN POP	SOURCE IDs
	2189641.	STCK1 , STCK2 , STCK3 , STCK4 , STCK5 , STCK6 , L0000001 , L0000002 ,
		L0000003 , L0000004 , L0000005 , L0000006 , L0000007 , L0000008 , L0000009 , L0000010 ,
		L0000011 , L0000012 , L0000013 , L0000014 , L0000015 , L0000016 , L0000017 , L0000018 ,
		L0000019 , L0000020 , L0000021 , L0000022 , L0000023 , L0000024 , L0000025 , L0000026 ,
		L0000027 , L0000028 , L0000029 , L0000030 , L0000031 , L0000032 , L0000033 , L0000034 ,
		L0000035 , L0000036 , L0000037 , L0000038 , L0000039 , L0000040 , L0000041 , L0000042 ,
		L0000043 , L0000044 , L0000045 , L0000046 , L0000047 , L0000048 , L0000049 , L0000050 ,
		L0000051 , L0000052 , L0000053 , L0000054 , L0000055 , L0000056 , L0000057 , L0000058 ,
		L0000059 , L0000060 , L0000061 , L0000062 , L0000063 , L0000064 , L0000065 , L0000066 ,
		L0000133 , L0000134 , L0000135 , L0000136 , L0000137 , L0000138 , L0000139 , L0000140 ,
		L0000141 , L0000142 , L0000143 , L0000144 , L0000145 , L0000146 , L0000147 , L0000148 ,
		L0000149 , L0000150 , L0000151 , L0000152 , L0000153 , L0000154 , L0000155 , L0000156 ,
		L0000157 , L0000158 , L0000159 , L0000160 , L0000161 , L0000162 , L0000163 , L0000164 ,
		L0000165 , L0000166 , L0000167 , L0000168 , L0000169 , L0000170 , L0000171 , L0000172 ,
		L0000173 , L0000174 , L0000175 , L0000176 , L0000177 , L0000178 , L0000179 , L0000180 ,
		L0000181 , L0000182 , L0000183 , L0000184 , L0000185 , L0000186 , L0000187 , L0000188 ,
		L0000189 , L0000190 , L0000191 , L0000192 , L0000193 , L0000194 , L0000195 , L0000196 ,

L0000197 , L0000198 , L0000199 , L0000200 , L0000201 , L0000202 , L0000203 , L0000204 ,

L0000205 , L0000206 , L0000207 , L0000208 , L0000209 , L0000210 , L0000211 , L0000212 ,

L0000213 , L0000214 , L0000215 , L0000216 , L0000217 , L0000218 , L0000219 , L0000220 ,

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** SOURCE IDs DEFINED AS URBAN SOURCES ***

URBAN ID	URBAN POP	SOURCE IDs

L0000221 , L0000222 , L0000223 , L0000224 , L0000225 , L0000226 , L0000227 , L0000228 ,

L0000229 , L0000230 , L0000231 , L0000232 , L0000233 , L0000234 , L0000235 , L0000236 ,

L0000237 , L0000238 , PAREA1 ,

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** DIRECTION SPECIFIC BUILDING DIMENSIONS ***

SOURCE ID: STCK1

IFV	BH	BW	BL	XADJ	YADJ	IFV	BH	BW	BL	XADJ	YADJ
1	11.0,	126.8,	240.7,	-250.3,	38.2,	2	11.0,	161.1,	247.7,	-260.0,	15.7,
3	11.0,	190.4,	247.7,	-261.7,	-7.3,	4	11.0,	214.0,	240.2,	-255.5,	-30.1,
5	11.0,	231.0,	225.4,	-241.6,	-52.0,	6	11.0,	241.1,	203.8,	-220.2,	-72.3,
7	11.0,	243.8,	175.9,	-192.2,	-90.4,	8	11.0,	239.1,	142.7,	-158.4,	-105.8,
9	11.0,	229.9,	107.5,	-119.7,	-119.3,	10	0.0,	0.0,	0.0,	0.0,	0.0,
11	0.0,	0.0,	0.0,	0.0,	0.0,	12	0.0,	0.0,	0.0,	0.0,	0.0,
13	0.0,	0.0,	0.0,	0.0,	0.0,	14	0.0,	0.0,	0.0,	0.0,	0.0,
15	0.0,	0.0,	0.0,	0.0,	0.0,	16	0.0,	0.0,	0.0,	0.0,	0.0,
17	0.0,	0.0,	0.0,	0.0,	0.0,	18	0.0,	0.0,	0.0,	0.0,	0.0,
19	11.0,	126.8,	240.7,	9.7,	-38.2,	20	11.0,	161.1,	247.7,	12.3,	-15.7,
21	11.0,	190.4,	247.7,	14.0,	7.3,	22	11.0,	214.0,	240.2,	15.3,	30.1,
23	11.0,	231.0,	225.4,	16.1,	52.0,	24	11.0,	241.1,	203.8,	16.5,	72.3,
25	11.0,	243.8,	175.9,	16.3,	90.4,	26	11.0,	239.1,	142.7,	15.7,	105.8,
27	11.0,	229.9,	107.5,	12.2,	119.3,	28	0.0,	0.0,	0.0,	0.0,	0.0,
29	0.0,	0.0,	0.0,	0.0,	0.0,	30	0.0,	0.0,	0.0,	0.0,	0.0,
31	0.0,	0.0,	0.0,	0.0,	0.0,	32	0.0,	0.0,	0.0,	0.0,	0.0,

33	0.0,	0.0,	0.0,	0.0,	0.0,	34	0.0,	0.0,	0.0,	0.0,	0.0,
35	0.0,	0.0,	0.0,	0.0,	0.0,	36	0.0,	0.0,	0.0,	0.0,	0.0,

SOURCE ID: STCK2

IFV	BH	BW	BL	XADJ	YADJ	IFV	BH	BW	BL	XADJ	YADJ
1	0.0,	0.0,	0.0,	0.0,	0.0,	2	0.0,	0.0,	0.0,	0.0,	0.0,
3	0.0,	0.0,	0.0,	0.0,	0.0,	4	0.0,	0.0,	0.0,	0.0,	0.0,
5	0.0,	0.0,	0.0,	0.0,	0.0,	6	0.0,	0.0,	0.0,	0.0,	0.0,
7	0.0,	0.0,	0.0,	0.0,	0.0,	8	0.0,	0.0,	0.0,	0.0,	0.0,
9	0.0,	0.0,	0.0,	0.0,	0.0,	10	11.0,	240.7,	126.8,	-141.7,	107.1,
11	11.0,	247.7,	161.1,	-176.8,	90.4,	12	11.0,	247.7,	190.4,	-206.6,	71.2,
13	11.0,	240.2,	214.0,	-230.1,	49.9,	14	11.0,	225.4,	231.0,	-246.6,	27.1,
15	11.0,	203.8,	241.1,	-255.6,	3.4,	16	11.0,	175.9,	243.8,	-256.9,	-20.4,
17	11.0,	142.7,	239.1,	-250.3,	-43.5,	18	0.0,	0.0,	0.0,	0.0,	0.0,
19	0.0,	0.0,	0.0,	0.0,	0.0,	20	0.0,	0.0,	0.0,	0.0,	0.0,
21	0.0,	0.0,	0.0,	0.0,	0.0,	22	0.0,	0.0,	0.0,	0.0,	0.0,
23	0.0,	0.0,	0.0,	0.0,	0.0,	24	0.0,	0.0,	0.0,	0.0,	0.0,
25	0.0,	0.0,	0.0,	0.0,	0.0,	26	0.0,	0.0,	0.0,	0.0,	0.0,
27	0.0,	0.0,	0.0,	0.0,	0.0,	28	11.0,	240.7,	126.8,	14.8,	-107.1,
29	11.0,	247.7,	161.1,	15.7,	-90.4,	30	11.0,	247.7,	190.4,	16.2,	-71.2,
31	11.0,	240.2,	214.0,	16.1,	-49.9,	32	11.0,	225.4,	231.0,	15.6,	-27.1,
33	11.0,	203.8,	241.1,	14.5,	-3.4,	34	11.0,	175.9,	243.8,	13.1,	20.4,
35	11.0,	142.7,	239.1,	11.2,	43.5,	36	0.0,	0.0,	0.0,	0.0,	0.0,

SOURCE ID: STCK3

IFV	BH	BW	BL	XADJ	YADJ	IFV	BH	BW	BL	XADJ	YADJ
1	0.0,	0.0,	0.0,	0.0,	0.0,	2	0.0,	0.0,	0.0,	0.0,	0.0,
3	11.0,	190.4,	247.7,	-181.5,	-97.2,	4	11.0,	214.0,	240.2,	-160.9,	-104.7,
5	11.0,	231.0,	225.4,	-135.4,	-109.0,	6	11.0,	241.1,	203.8,	-105.8,	-110.0,
7	11.0,	243.8,	175.9,	-73.0,	-107.7,	8	11.0,	239.1,	142.7,	-37.9,	-102.1,
9	11.0,	229.9,	107.5,	-1.8,	-94.7,	10	11.0,	240.7,	126.8,	10.3,	-85.3,
11	11.0,	247.7,	161.1,	6.3,	-72.7,	12	11.0,	247.7,	190.4,	2.0,	-57.6,
13	11.0,	240.2,	214.0,	-2.2,	-40.8,	14	11.0,	225.4,	231.0,	-6.5,	-22.7,
15	11.0,	203.8,	241.1,	-10.5,	-3.9,	16	11.0,	175.9,	243.8,	-14.2,	15.0,
17	11.0,	142.7,	239.1,	-17.5,	33.4,	18	11.0,	107.5,	229.9,	-20.2,	52.0,
19	0.0,	0.0,	0.0,	0.0,	0.0,	20	0.0,	0.0,	0.0,	0.0,	0.0,
21	11.0,	190.4,	247.7,	-66.2,	97.2,	22	11.0,	214.0,	240.2,	-79.3,	104.7,
23	11.0,	231.0,	225.4,	-90.0,	109.0,	24	11.0,	241.1,	203.8,	-98.0,	110.0,
25	11.0,	243.8,	175.9,	-103.0,	107.7,	26	11.0,	239.1,	142.7,	-104.8,	102.1,
27	11.0,	229.9,	107.5,	-105.8,	94.7,	28	11.0,	240.7,	126.8,	-137.1,	85.3,
29	11.0,	247.7,	161.1,	-167.3,	72.7,	30	11.0,	247.7,	190.4,	-192.5,	57.6,
31	11.0,	240.2,	214.0,	-211.7,	40.8,	32	11.0,	225.4,	231.0,	-224.6,	22.7,
33	11.0,	203.8,	241.1,	-230.6,	3.9,	34	11.0,	175.9,	243.8,	-229.6,	-15.0,
35	11.0,	142.7,	239.1,	-221.6,	-33.4,	36	11.0,	107.5,	229.9,	-209.7,	-52.0,

SOURCE ID: STCK4

IFV	BH	BW	BL	XADJ	YADJ	IFV	BH	BW	BL	XADJ	YADJ
1	11.0,	126.8,	240.7,	-154.2,	-65.8,	2	11.0,	161.1,	247.7,	-147.3,	-70.1,

3	11.0,	190.4,	247.7,	-135.8,	-72.2,	4	11.0,	214.0,	240.2,	-120.3,	-72.2,
5	11.0,	231.0,	225.4,	-101.0,	-69.9,	6	11.0,	241.1,	203.8,	-78.8,	-65.5,
7	11.0,	243.8,	175.9,	-54.1,	-59.2,	8	11.0,	239.1,	142.7,	-27.8,	-51.0,
9	11.0,	229.9,	107.5,	-0.6,	-42.7,	10	11.0,	240.7,	126.8,	2.4,	-33.9,
11	11.0,	247.7,	161.1,	-10.4,	-23.4,	12	11.0,	247.7,	190.4,	-23.0,	-12.0,
13	11.0,	240.2,	214.0,	-34.8,	-0.2,	14	11.0,	225.4,	231.0,	-45.6,	11.7,
15	11.0,	203.8,	241.1,	-55.0,	23.1,	16	11.0,	175.9,	243.8,	-62.7,	33.9,
17	11.0,	142.7,	239.1,	-68.5,	43.6,	18	11.0,	107.5,	229.9,	-72.3,	53.2,
19	11.0,	126.8,	240.7,	-86.4,	65.8,	20	11.0,	161.1,	247.7,	-100.4,	70.1,
21	11.0,	190.4,	247.7,	-111.9,	72.2,	22	11.0,	214.0,	240.2,	-119.9,	72.2,
23	11.0,	231.0,	225.4,	-124.3,	69.9,	24	11.0,	241.1,	203.8,	-125.0,	65.5,
25	11.0,	243.8,	175.9,	-121.8,	59.2,	26	11.0,	239.1,	142.7,	-115.0,	51.0,
27	11.0,	229.9,	107.5,	-106.9,	42.7,	28	11.0,	240.7,	126.8,	-129.2,	33.9,
29	11.0,	247.7,	161.1,	-150.6,	23.4,	30	11.0,	247.7,	190.4,	-167.5,	12.0,
31	11.0,	240.2,	214.0,	-179.2,	0.2,	32	11.0,	225.4,	231.0,	-185.5,	-11.7,
33	11.0,	203.8,	241.1,	-186.1,	-23.1,	34	11.0,	175.9,	243.8,	-181.1,	-33.9,
35	11.0,	142.7,	239.1,	-170.6,	-43.6,	36	11.0,	107.5,	229.9,	-157.7,	-53.2,

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** DIRECTION SPECIFIC BUILDING DIMENSIONS ***

SOURCE ID: STCK5

IFV	BH	BW	BL	XADJ	YADJ	IFV	BH	BW	BL	XADJ	YADJ
1	11.0,	126.8,	240.7,	-111.4,	-60.2,	2	11.0,	161.1,	247.7,	-106.0,	-57.1,
3	11.0,	190.4,	247.7,	-97.5,	-52.2,	4	11.0,	214.0,	240.2,	-86.0,	-45.8,
5	11.0,	231.0,	225.4,	-71.9,	-38.0,	6	11.0,	241.1,	203.8,	-55.6,	-29.1,
7	11.0,	243.8,	175.9,	-37.6,	-19.2,	8	11.0,	239.1,	142.7,	-18.4,	-8.8,
9	11.0,	229.9,	107.5,	1.3,	0.5,	10	11.0,	240.7,	126.8,	-3.2,	9.0,
11	11.0,	247.7,	161.1,	-23.5,	17.8,	12	11.0,	247.7,	190.4,	-43.0,	26.4,
13	11.0,	240.2,	214.0,	-61.1,	34.1,	14	11.0,	225.4,	231.0,	-77.5,	40.8,
15	11.0,	203.8,	241.1,	-91.5,	46.3,	16	11.0,	175.9,	243.8,	-102.7,	50.4,
17	11.0,	142.7,	239.1,	-110.8,	52.9,	18	11.0,	107.5,	229.9,	-115.5,	55.0,
19	11.0,	126.8,	240.7,	-129.3,	60.2,	20	11.0,	161.1,	247.7,	-141.7,	57.1,
21	11.0,	190.4,	247.7,	-150.2,	52.2,	22	11.0,	214.0,	240.2,	-154.2,	45.8,
23	11.0,	231.0,	225.4,	-153.6,	38.0,	24	11.0,	241.1,	203.8,	-148.2,	29.1,
25	11.0,	243.8,	175.9,	-138.4,	19.2,	26	11.0,	239.1,	142.7,	-124.3,	8.8,
27	11.0,	229.9,	107.5,	-108.8,	-0.5,	28	11.0,	240.7,	126.8,	-123.6,	-9.0,
29	11.0,	247.7,	161.1,	-137.6,	-17.8,	30	11.0,	247.7,	190.4,	-147.5,	-26.4,
31	11.0,	240.2,	214.0,	-152.8,	-34.1,	32	11.0,	225.4,	231.0,	-153.6,	-40.8,
33	11.0,	203.8,	241.1,	-149.6,	-46.3,	34	11.0,	175.9,	243.8,	-141.1,	-50.4,
35	11.0,	142.7,	239.1,	-128.4,	-52.9,	36	11.0,	107.5,	229.9,	-114.5,	-55.0,

SOURCE ID: STCK6

IFV	BH	BW	BL	XADJ	YADJ	IFV	BH	BW	BL	XADJ	YADJ

```
   1   11.0,  126.8,  240.7,  -65.5,  -51.4,      2   11.0,  161.1,  247.7,  -62.4,  -40.4,
   3   11.0,  190.4,  247.7,  -57.4,  -28.3,      4   11.0,  214.0,  240.2,  -50.7,  -15.3,
   5   11.0,  231.0,  225.4,  -42.4,   -1.8,      6   11.0,  241.1,  203.8,  -32.8,   11.7,
   7   11.0,  243.8,  175.9,  -22.2,   24.9,      8   11.0,  239.1,  142.7,  -11.0,   37.3,
   9   11.0,  229.9,  107.5,    0.6,   47.2,     10   11.0,  240.7,  126.8,  -12.1,   54.8,
  11   11.0,  247.7,  161.1,  -40.1,   61.4,     12   11.0,  247.7,  190.4,  -66.9,   66.5,
  13   11.0,  240.2,  214.0,  -91.7,   69.4,     14   11.0,  225.4,  231.0, -113.7,   70.3,
  15   11.0,  203.8,  241.1, -132.2,   69.1,     16   11.0,  175.9,  243.8, -146.8,   65.7,
  17   11.0,  142.7,  239.1, -156.9,   60.4,     18   11.0,  107.5,  229.9, -162.2,   54.3,
  19   11.0,  126.8,  240.7, -175.1,   51.4,     20   11.0,  161.1,  247.7, -185.3,   40.4,
  21   11.0,  190.4,  247.7, -190.3,   28.3,     22   11.0,  214.0,  240.2, -189.5,   15.3,
  23   11.0,  231.0,  225.4, -183.0,    1.8,     24   11.0,  241.1,  203.8, -170.9,  -11.7,
  25   11.0,  243.8,  175.9, -153.7,  -24.9,     26   11.0,  239.1,  142.7, -131.7,  -37.3,
  27   11.0,  229.9,  107.5, -108.1,  -47.2,     28   11.0,  240.7,  126.8, -114.8,  -54.8,
  29   11.0,  247.7,  161.1, -121.0,  -61.4,     30   11.0,  247.7,  190.4, -123.5,  -66.5,
  31   11.0,  240.2,  214.0, -122.3,  -69.4,     32   11.0,  225.4,  231.0, -117.3,  -70.3,
  33   11.0,  203.8,  241.1, -108.8,  -69.1,     34   11.0,  175.9,  243.8,  -97.0,  -65.7,
  35   11.0,  142.7,  239.1,  -82.2,  -60.4,     36   11.0,  107.5,  229.9,  -67.8,  -54.3,

*** AERMOD - VERSION 22112  ***   *** 19370 Redlands Avenue West  - new site plan                        ***        04/04/23
*** AERMET - VERSION  16216 ***   *** DPM Conc 2023 OY                                                 ***        18:16:30
                                                                                                                PAGE  15
*** MODELOPTs:    RegDFAULT  CONC  ELEV  URBAN  ADJ_U*

                                    *** GRIDDED RECEPTOR NETWORK SUMMARY ***

                                  *** NETWORK ID: UCART1   ;  NETWORK TYPE: GRIDCART ***

                                        *** X-COORDINATES OF GRID ***
                                                  (METERS)

     479286.7,  479311.7,  479336.7,  479361.7,  479386.7,  479411.7,  479436.7,  479461.7,  479486.7,  479511.7,
     479536.7,  479561.7,  479586.7,  479611.7,  479636.7,  479661.7,  479686.7,  479711.7,  479736.7,  479761.7,
     479786.7,

                                        *** Y-COORDINATES OF GRID ***
                                                  (METERS)

    3742719.1, 3742744.1, 3742769.1, 3742794.1, 3742819.1, 3742844.1, 3742869.1, 3742894.1, 3742919.1, 3742944.1,
    3742969.1, 3742994.1, 3743019.1, 3743044.1, 3743069.1, 3743094.1, 3743119.1, 3743144.1, 3743169.1, 3743194.1,
    3743219.1,

*** AERMOD - VERSION 22112  ***   *** 19370 Redlands Avenue West  - new site plan                        ***        04/04/23
*** AERMET - VERSION  16216 ***   *** DPM Conc 2023 OY                                                 ***        18:16:30
                                                                                                                PAGE  16
*** MODELOPTs:    RegDFAULT  CONC  ELEV  URBAN  ADJ_U*

                                  *** NETWORK ID: UCART1   ;  NETWORK TYPE: GRIDCART ***

                                      * ELEVATION HEIGHTS IN METERS *
```

Y-COORD (METERS)	X-COORD (METERS)								
	479286.72	479311.72	479336.72	479361.72	479386.72	479411.72	479436.72	479461.72	479486.72
3743219.09	442.70	442.70	442.50	442.20	442.10	441.90	441.50	441.10	441.10
3743194.09	442.70	442.60	442.60	442.50	442.20	442.10	441.80	441.30	441.10
3743169.09	442.60	442.50	442.50	442.40	442.30	442.20	442.00	441.60	441.20
3743144.09	442.60	442.50	442.50	442.40	442.30	442.20	442.10	441.90	441.40
3743119.09	442.60	442.60	442.50	442.40	442.40	442.30	442.10	442.00	441.60
3743094.09	442.60	442.60	442.50	442.50	442.40	442.30	442.10	442.00	441.80
3743069.09	442.50	442.40	442.40	442.30	442.20	442.10	442.10	442.00	441.90
3743044.09	442.60	442.50	442.50	442.40	442.30	442.20	442.20	442.10	442.00
3743019.09	442.60	442.50	442.40	442.30	442.20	442.20	442.20	442.10	441.90
3742994.09	442.60	442.40	442.30	442.20	442.20	442.10	442.00	442.00	441.90
3742969.09	442.50	442.40	442.30	442.20	442.20	442.10	442.00	442.00	441.90
3742944.09	442.60	442.40	442.30	442.30	442.20	442.10	442.10	442.00	442.00
3742919.09	442.40	442.20	442.20	442.10	442.00	442.00	441.90	441.80	441.80
3742894.09	442.40	442.30	442.20	442.10	442.10	442.00	442.00	441.90	441.90
3742869.09	442.40	442.30	442.20	442.20	442.20	442.10	442.10	442.00	441.90
3742844.09	442.30	442.10	442.10	442.20	442.20	442.10	442.10	442.00	441.80
3742819.09	442.10	441.70	441.80	442.10	442.00	441.80	441.90	441.90	441.60
3742794.09	442.00	441.60	441.70	442.00	441.90	441.70	441.60	441.60	441.40
3742769.09	441.90	441.50	441.70	441.90	441.80	441.60	441.60	441.70	441.50
3742744.09	441.80	441.40	441.50	441.80	441.70	441.50	441.50	441.50	441.40
3742719.09	441.60	441.30	441.40	441.70	441.60	441.30	441.20	441.20	441.10

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

* ELEVATION HEIGHTS IN METERS *

Y-COORD (METERS)	X-COORD (METERS)								
	479511.72	479536.72	479561.72	479586.72	479611.72	479636.72	479661.72	479686.72	479711.72
3743219.09	441.20	441.30	441.40	441.40	441.40	441.40	441.30	441.30	441.20
3743194.09	441.00	441.00	441.10	441.20	441.20	441.20	441.10	441.10	441.00
3743169.09	441.00	441.00	441.00	441.10	441.10	441.10	441.00	441.00	441.00
3743144.09	440.80	440.60	440.60	440.60	440.60	440.60	440.60	440.60	440.70
3743119.09	441.00	440.70	440.60	440.60	440.60	440.50	440.50	440.50	440.60
3743094.09	441.70	441.60	441.50	441.40	441.30	441.30	441.20	441.20	441.20
3743069.09	442.00	442.00	441.80	441.60	441.50	441.40	441.40	441.30	441.30
3743044.09	441.90	441.90	441.80	441.60	441.40	441.40	441.30	441.30	441.20
3743019.09	441.80	441.80	441.70	441.50	441.40	441.30	441.20	441.20	441.10
3742994.09	441.80	441.70	441.70	441.50	441.30	441.20	441.10	441.00	441.00
3742969.09	441.80	441.70	441.60	441.50	441.30	441.20	441.10	441.00	440.90

3742944.09	441.90	441.70	441.50	441.40	441.30	441.20	441.10	441.00	440.90
3742919.09	441.70	441.60	441.50	441.40	441.40	441.30	441.10	441.00	441.00
3742894.09	441.80	441.70	441.50	441.40	441.40	441.30	441.20	441.10	441.00
3742869.09	441.80	441.80	441.60	441.40	441.30	441.20	441.10	441.00	441.00
3742844.09	441.70	441.70	441.70	441.40	441.00	441.00	441.00	440.90	440.90
3742819.09	441.40	441.40	441.40	441.10	440.70	440.60	440.80	440.80	440.80
3742794.09	441.20	441.10	441.00	440.80	440.60	440.40	440.50	440.70	440.70
3742769.09	441.30	441.20	441.10	441.00	440.80	440.50	440.30	440.50	440.60
3742744.09	441.30	441.10	441.10	441.00	440.80	440.50	440.20	440.20	440.50
3742719.09	441.00	440.90	440.80	440.60	440.50	440.40	440.20	440.00	440.20

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

* ELEVATION HEIGHTS IN METERS *

Y-COORD (METERS)	X-COORD (METERS) 479736.72	479761.72	479786.72
3743219.09	441.00	440.60	440.60
3743194.09	440.90	440.70	440.70
3743169.09	440.90	440.70	440.80
3743144.09	440.80	440.90	440.90
3743119.09	440.80	441.00	441.00
3743094.09	441.20	441.20	441.10
3743069.09	441.20	441.20	441.00
3743044.09	441.10	441.10	440.90
3743019.09	441.00	441.00	440.80
3742994.09	440.90	440.80	440.70
3742969.09	440.80	440.70	440.60
3742944.09	440.80	440.70	440.60
3742919.09	440.80	440.80	440.70
3742894.09	440.90	440.80	440.70
3742869.09	440.90	440.80	440.70
3742844.09	440.80	440.80	440.70
3742819.09	440.70	440.60	440.60
3742794.09	440.60	440.50	440.50
3742769.09	440.60	440.50	440.40
3742744.09	440.50	440.40	440.40
3742719.09	440.40	440.40	440.30

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

* HILL HEIGHT SCALES IN METERS *

Y-COORD (METERS)	X-COORD (METERS)								
	479286.72	479311.72	479336.72	479361.72	479386.72	479411.72	479436.72	479461.72	479486.72
3743219.09	442.70	442.70	442.50	442.20	442.10	441.90	441.50	441.10	441.10
3743194.09	442.70	442.60	442.60	442.50	442.20	442.10	441.80	441.30	441.10
3743169.09	442.60	442.50	442.50	442.40	442.30	442.20	442.00	441.60	441.20
3743144.09	442.60	442.50	442.50	442.40	442.30	442.20	442.10	441.90	441.40
3743119.09	442.60	442.60	442.50	442.40	442.40	442.30	442.10	442.00	441.60
3743094.09	442.60	442.60	442.50	442.50	442.40	442.30	442.10	442.00	441.80
3743069.09	442.50	442.40	442.40	442.30	442.20	442.10	442.10	442.00	441.90
3743044.09	442.60	442.50	442.50	442.40	442.30	442.20	442.20	442.10	442.00
3743019.09	442.60	442.50	442.40	442.30	442.20	442.20	442.20	442.10	441.90
3742994.09	442.60	442.40	442.30	442.20	442.20	442.10	442.00	442.00	441.90
3742969.09	442.50	442.40	442.30	442.20	442.20	442.10	442.00	442.00	441.90
3742944.09	442.60	442.40	442.30	442.30	442.20	442.10	442.10	442.00	442.00
3742919.09	442.40	442.20	442.20	442.10	442.00	442.00	441.90	441.80	441.80
3742894.09	442.40	442.30	442.20	442.10	442.10	442.00	442.00	441.90	441.90
3742869.09	442.40	442.30	442.20	442.20	442.20	442.10	442.10	442.00	441.90
3742844.09	442.30	442.10	442.10	442.20	442.20	442.10	442.10	442.00	441.80
3742819.09	442.10	441.70	441.80	442.10	442.00	441.80	441.90	441.90	441.60
3742794.09	442.00	441.60	441.70	442.00	441.90	441.70	441.60	441.60	441.40
3742769.09	441.90	441.50	441.70	441.90	441.80	441.60	441.60	441.70	441.50
3742744.09	441.80	441.40	441.50	441.80	441.70	441.50	441.50	441.50	441.40
3742719.09	441.60	441.30	441.40	441.70	441.60	441.30	441.20	441.20	441.10

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

* HILL HEIGHT SCALES IN METERS *

Y-COORD (METERS)	X-COORD (METERS)								
	479511.72	479536.72	479561.72	479586.72	479611.72	479636.72	479661.72	479686.72	479711.72
3743219.09	441.20	441.30	441.40	441.40	441.40	441.40	441.30	441.30	441.20
3743194.09	441.00	441.00	441.10	441.20	441.20	441.20	441.10	441.10	441.00
3743169.09	441.00	441.00	441.00	441.10	441.10	441.10	441.00	441.00	441.00
3743144.09	440.80	440.60	440.60	440.60	440.60	440.60	440.60	440.60	440.70
3743119.09	441.00	440.70	440.60	440.60	440.60	440.50	440.50	440.50	440.60
3743094.09	441.70	441.60	441.50	441.40	441.30	441.30	441.20	441.20	441.20
3743069.09	442.00	442.00	441.80	441.60	441.50	441.40	441.40	441.30	441.30
3743044.09	441.90	441.90	441.80	441.60	441.40	441.40	441.30	441.30	441.20

3743019.09	441.80	441.80	441.70	441.50	441.40	441.30	441.20	441.20	441.10
3742994.09	441.80	441.70	441.70	441.50	441.30	441.20	441.10	441.00	441.00
3742969.09	441.80	441.70	441.60	441.50	441.30	441.20	441.10	441.00	440.90
3742944.09	441.90	441.70	441.50	441.40	441.30	441.20	441.10	441.00	440.90
3742919.09	441.70	441.60	441.50	441.40	441.40	441.30	441.10	441.00	441.00
3742894.09	441.80	441.70	441.50	441.40	441.40	441.30	441.20	441.10	441.00
3742869.09	441.80	441.80	441.60	441.40	441.30	441.20	441.10	441.00	441.00
3742844.09	441.70	441.70	441.70	441.40	441.00	441.00	441.00	440.90	440.90
3742819.09	441.40	441.40	441.40	441.10	440.70	440.60	440.80	440.80	440.80
3742794.09	441.20	441.10	441.00	440.80	440.60	440.40	440.50	440.70	440.70
3742769.09	441.30	441.20	441.10	441.00	440.80	440.50	440.30	440.50	440.60
3742744.09	441.30	441.10	441.10	441.00	440.80	440.50	440.20	440.20	440.50
3742719.09	441.00	440.90	440.80	440.60	440.50	440.40	440.20	440.00	440.20

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

* HILL HEIGHT SCALES IN METERS *

Y-COORD (METERS)	X-COORD (METERS) 479736.72	479761.72	479786.72
3743219.09	441.00	440.60	440.60
3743194.09	440.90	440.70	440.70
3743169.09	440.90	440.70	440.80
3743144.09	440.80	440.90	440.90
3743119.09	440.80	441.00	441.00
3743094.09	441.20	441.20	441.10
3743069.09	441.20	441.20	441.00
3743044.09	441.10	441.10	440.90
3743019.09	441.00	441.00	440.80
3742994.09	440.90	440.80	440.70
3742969.09	440.80	440.70	440.60
3742944.09	440.80	440.70	440.60
3742919.09	440.80	440.80	440.70
3742894.09	440.90	440.80	440.70
3742869.09	440.90	440.80	440.70
3742844.09	440.80	440.80	440.70
3742819.09	440.70	440.60	440.60
3742794.09	440.60	440.50	440.50
3742769.09	440.60	440.50	440.40
3742744.09	440.50	440.40	440.40
3742719.09	440.40	440.40	440.30

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** DISCRETE CARTESIAN RECEPTORS ***
(X-COORD, Y-COORD, ZELEV, ZHILL, ZFLAG)
(METERS)

(	479365.8,	3743082.3,	442.4,	442.4,	0.0);	(	479387.2,	3743034.2,	442.3,	442.3,	0.0);
(	479424.4,	3742962.4,	442.1,	442.1,	0.0);	(	479458.5,	3742888.6,	441.9,	441.9,	0.0);
(	479491.7,	3742826.1,	441.6,	441.6,	0.0);	(	479707.3,	3742739.3,	440.4,	440.4,	0.0);
(	479568.5,	3743368.4,	440.7,	440.7,	0.0);	(	479517.3,	3743358.8,	441.1,	441.1,	0.0);

*** AERMOD - VERSION 22112 *** *** 19370 Redlands Avenue West - new site plan *** 04/04/23
*** AERMET - VERSION 16216 *** *** DPM Conc 2023 OY *** 18:16:30

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

* SOURCE-RECEPTOR COMBINATIONS FOR WHICH CALCULATIONS MAY NOT BE PERFORMED *
LESS THAN 1.0 METER; WITHIN OPENPIT; OR BEYOND 80KM FOR FASTAREA/FASTALL

SOURCE ID	- - RECEPTOR LOCATION - - XR (METERS)	YR (METERS)	DISTANCE (METERS)
L0000018	479511.7	3742869.1	-3.98
L0000019	479511.7	3742869.1	-2.15
L0000021	479511.7	3742894.1	-1.57
L0000024	479486.7	3742919.1	0.50
L0000025	479486.7	3742919.1	-3.25
L0000027	479486.7	3742944.1	-1.78
L0000028	479486.7	3742944.1	-1.89
L0000031	479461.7	3742969.1	-0.30
L0000033	479461.7	3742994.1	0.31
L0000034	479461.7	3742994.1	-7.75
L0000035	479461.7	3742994.1	-0.47
L0000036	479461.7	3743019.1	0.48
L0000037	479461.7	3743019.1	-6.77
L0000038	479461.7	3743019.1	-0.12
L0000039	479461.7	3743044.1	-0.50
L0000040	479461.7	3743044.1	-7.84
L0000041	479461.7	3743044.1	0.53
L0000043	479461.7	3743069.1	-0.95
L0000048	479511.7	3743094.1	-0.86
L0000049	479511.7	3743094.1	-7.37
L0000050	479511.7	3743094.1	0.64
L0000051	479536.7	3743094.1	-0.06
L0000052	479536.7	3743094.1	-3.32
L0000055	479561.7	3743094.1	-1.70
L0000057	479586.7	3743094.1	0.47
L0000058	479586.7	3743094.1	-1.82

L0000060	479611.7	3743094.1	-0.31
L0000061	479611.7	3743094.1	-1.83
L0000063	479636.7	3743094.1	-1.07
L0000064	479636.7	3743094.1	-1.74
L0000066	479661.7	3743094.1	-1.82
L0000134	479661.7	3742869.1	-0.45
L0000137	479661.7	3742894.1	0.25
L0000140	479661.7	3742919.1	0.46
L0000143	479661.7	3742944.1	0.74
L0000145	479661.7	3742969.1	0.97
L0000148	479661.7	3742994.1	0.66
L0000151	479661.7	3743019.1	0.40
L0000154	479661.7	3743044.1	0.21
L0000157	479661.7	3743069.1	0.08

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

* SOURCE-RECEPTOR COMBINATIONS FOR WHICH CALCULATIONS MAY NOT BE PERFORMED *
LESS THAN 1.0 METER; WITHIN OPENPIT; OR BEYOND 80KM FOR FASTAREA/FASTALL

SOURCE ID	- - RECEPTOR LOCATION - - XR (METERS)	YR (METERS)	DISTANCE (METERS)
L0000160	479661.7	3743094.1	0.01
L0000162	479661.7	3743119.1	-0.08
L0000165	479661.7	3743144.1	-0.89
L0000168	479661.7	3743169.1	-1.65
L0000171	479661.7	3743194.1	-2.36
L0000174	479661.7	3743219.1	-2.99

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** METEOROLOGICAL DAYS SELECTED FOR PROCESSING ***
(1=YES; 0=NO)

```
1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1   1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1   1 1 1 1 1
```

NOTE: METEOROLOGICAL DATA ACTUALLY PROCESSED WILL ALSO DEPEND ON WHAT IS INCLUDED IN THE DATA FILE.

*** UPPER BOUND OF FIRST THROUGH FIFTH WIND SPEED CATEGORIES ***
(METERS/SEC)

1.54, 3.09, 5.14, 8.23, 10.80,

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** UP TO THE FIRST 24 HOURS OF METEOROLOGICAL DATA ***

Surface file: E:\New MET data\PERI_V9_ADJU\PERI_v9.SFC Met Version: 16216
Profile file: E:\New MET data\PERI_V9_ADJU\PERI_v9.PFL
Surface format: FREE
Profile format: FREE
Surface station no.: 3171 Upper air station no.: 3190
Name: UNKNOWN Name: UNKNOWN
Year: 2010 Year: 2010

First 24 hours of scalar data

YR	MO	DY	JDY	HR	H0	U*	W*	DT/DZ	ZICNV	ZIMCH	M-O LEN	Z0	BOWEN	ALBEDO	REF WS	WD	HT	REF TA	HT
10	01	01	1	01	-7.9	0.125	-9.000	-9.000	-999.	106.	21.2	0.19	0.61	1.00	1.30	335.	9.1	282.5	5.5
10	01	01	1	02	-3.9	0.088	-9.000	-9.000	-999.	62.	15.1	0.19	0.61	1.00	0.90	142.	9.1	280.9	5.5
10	01	01	1	03	-3.9	0.088	-9.000	-9.000	-999.	62.	15.1	0.19	0.61	1.00	0.90	324.	9.1	280.4	5.5
10	01	01	1	04	-1.3	0.064	-9.000	-9.000	-999.	39.	18.3	0.19	0.61	1.00	0.40	294.	9.1	278.8	5.5
10	01	01	1	05	-3.9	0.088	-9.000	-9.000	-999.	62.	15.0	0.19	0.61	1.00	0.90	205.	9.1	278.1	5.5
10	01	01	1	06	-1.3	0.065	-9.000	-9.000	-999.	39.	18.3	0.19	0.61	1.00	0.40	3.	9.1	277.0	5.5
10	01	01	1	07	-8.0	0.125	-9.000	-9.000	-999.	106.	21.0	0.19	0.61	1.00	1.30	99.	9.1	277.0	5.5
10	01	01	1	08	-3.3	0.086	-9.000	-9.000	-999.	61.	16.8	0.19	0.61	0.54	0.90	319.	9.1	278.8	5.5
10	01	01	1	09	20.1	0.128	0.307	0.010	49.	110.	-9.0	0.19	0.61	0.33	0.90	239.	9.1	284.2	5.5
10	01	01	1	10	56.7	0.087	0.560	0.010	107.	62.	-1.0	0.19	0.61	0.26	0.40	188.	9.1	289.2	5.5
10	01	01	1	11	81.5	0.323	0.867	0.008	277.	441.	-35.9	0.19	0.61	0.23	2.70	310.	9.1	290.9	5.5
10	01	01	1	12	97.1	0.281	1.058	0.008	421.	357.	-19.7	0.19	0.61	0.22	2.20	357.	9.1	293.1	5.5
10	01	01	1	13	92.2	0.279	1.117	0.008	523.	354.	-20.4	0.19	0.61	0.22	2.20	356.	9.1	293.8	5.5
10	01	01	1	14	77.6	0.275	1.102	0.008	595.	347.	-23.2	0.19	0.61	0.23	2.20	50.	9.1	294.2	5.5
10	01	01	1	15	54.9	0.230	1.006	0.008	640.	266.	-19.2	0.19	0.61	0.27	1.80	53.	9.1	293.8	5.5
10	01	01	1	16	12.3	0.206	0.613	0.008	648.	225.	-61.5	0.19	0.61	0.36	1.80	11.	9.1	292.5	5.5
10	01	01	1	17	-3.6	0.087	-9.000	-9.000	-999.	71.	15.6	0.19	0.61	0.64	0.90	351.	9.1	290.4	5.5
10	01	01	1	18	-3.8	0.087	-9.000	-9.000	-999.	62.	15.2	0.19	0.61	1.00	0.90	186.	9.1	287.5	5.5
10	01	01	1	19	-3.8	0.087	-9.000	-9.000	-999.	62.	15.2	0.19	0.61	1.00	0.90	275.	9.1	285.9	5.5
10	01	01	1	20	-1.2	0.064	-9.000	-9.000	-999.	39.	18.1	0.19	0.61	1.00	0.40	181.	9.1	285.4	5.5
10	01	01	1	21	-7.8	0.125	-9.000	-9.000	-999.	106.	21.3	0.19	0.61	1.00	1.30	318.	9.1	284.9	5.5
10	01	01	1	22	-3.8	0.088	-9.000	-9.000	-999.	62.	15.1	0.19	0.61	1.00	0.90	196.	9.1	283.1	5.5
10	01	01	1	23	-3.8	0.088	-9.000	-9.000	-999.	62.	15.1	0.19	0.61	1.00	0.90	330.	9.1	281.4	5.5

```
10 01 01   1 24   -7.9  0.125 -9.000 -9.000 -999.  106.     21.2  0.19   0.61   1.00    1.30  332.    9.1  280.9    5.5


First hour of profile data
YR MO DY HR HEIGHT F  WDIR    WSPD AMB_TMP sigmaA  sigmaW  sigmaV
10 01 01 01    5.5 0 -999.  -99.00   282.6   99.0  -99.00  -99.00
10 01 01 01    9.1 1  335.    1.30  -999.0   99.0  -99.00  -99.00

F indicates top of profile (=1) or below (=0)

*** AERMOD - VERSION 22112  ***   *** 19370 Redlands Avenue West  - new site plan                          ***        04/04/23
*** AERMET - VERSION  16216 ***   *** DPM Conc 2023 OY                                                    ***        18:16:30
                                                                                                                    PAGE  27
*** MODELOPTs:    RegDFAULT  CONC  ELEV  URBAN  ADJ_U*

                          *** THE PERIOD ( 43824 HRS) AVERAGE CONCENTRATION   VALUES FOR SOURCE GROUP: ALL      ***
                              INCLUDING SOURCE(S):     STCK1       , STCK2       , STCK3       , STCK4       , STCK5       ,
               STCK6       , L0000001    , L0000002    , L0000003    , L0000004    , L0000005    , L0000006    , L0000007    ,
               L0000008    , L0000009    , L0000010    , L0000011    , L0000012    , L0000013    , L0000014    , L0000015    ,
               L0000016    , L0000017    , L0000018    , L0000019    , L0000020    , L0000021    , L0000022    ,  . . .      ,

                               *** NETWORK ID: UCART1   ;  NETWORK TYPE: GRIDCART ***

                                    ** CONC OF DPM      IN MICROGRAMS/M**3                        **

   Y-COORD  |                                              X-COORD (METERS)
   (METERS) |     479286.72    479311.72    479336.72    479361.72    479386.72    479411.72    479436.72    479461.72    479486.72
- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - -

 3743219.09 |       0.00126      0.00143      0.00164      0.00187      0.00214      0.00244      0.00274      0.00305      0.00335
 3743194.09 |       0.00128      0.00146      0.00168      0.00194      0.00224      0.00259      0.00297      0.00338      0.00377
 3743169.09 |       0.00129      0.00148      0.00171      0.00200      0.00234      0.00276      0.00323      0.00377      0.00431
 3743144.09 |       0.00130      0.00150      0.00174      0.00205      0.00244      0.00293      0.00353      0.00425      0.00504
 3743119.09 |       0.00131      0.00151      0.00176      0.00209      0.00253      0.00310      0.00389      0.00492      0.00654
 3743094.09 |       0.00131      0.00151      0.00178      0.00212      0.00260      0.00327      0.00438      0.00644      0.00931
 3743069.09 |       0.00131      0.00152      0.00178      0.00215      0.00266      0.00349      0.00504      0.00807      0.00934
 3743044.09 |       0.00130      0.00151      0.00177      0.00214      0.00268      0.00364      0.00553      0.00659      0.00787
 3743019.09 |       0.00129      0.00149      0.00175      0.00212      0.00268      0.00364      0.00562      0.00639      0.00724
 3742994.09 |       0.00127      0.00147      0.00173      0.00208      0.00259      0.00357      0.00521      0.00608      0.00720
 3742969.09 |       0.00125      0.00144      0.00168      0.00201      0.00250      0.00331      0.00475      0.00701      0.00767
 3742944.09 |       0.00122      0.00140      0.00163      0.00192      0.00233      0.00306      0.00411      0.00592      0.00703
 3742919.09 |       0.00119      0.00136      0.00157      0.00183      0.00219      0.00273      0.00368      0.00482      0.00681
 3742894.09 |       0.00116      0.00131      0.00150      0.00173      0.00204      0.00247      0.00322      0.00429      0.00634
 3742869.09 |       0.00111      0.00125      0.00142      0.00163      0.00189      0.00224      0.00277      0.00372      0.00511
 3742844.09 |       0.00107      0.00120      0.00135      0.00152      0.00174      0.00202      0.00240      0.00301      0.00407
 3742819.09 |       0.00102      0.00114      0.00127      0.00142      0.00160      0.00183      0.00212      0.00252      0.00310
 3742794.09 |       0.00097      0.00107      0.00118      0.00131      0.00146      0.00165      0.00187      0.00216      0.00255
 3742769.09 |       0.00092      0.00100      0.00110      0.00121      0.00134      0.00148      0.00166      0.00189      0.00217
 3742744.09 |       0.00086      0.00094      0.00102      0.00112      0.00122      0.00134      0.00149      0.00166      0.00188
 3742719.09 |       0.00081      0.00088      0.00095      0.00103      0.00112      0.00122      0.00133      0.00148      0.00165
```

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** THE PERIOD (43824 HRS) AVERAGE CONCENTRATION VALUES FOR SOURCE GROUP: ALL ***
INCLUDING SOURCE(S): STCK1 , STCK2 , STCK3 , STCK4 , STCK5 ,
STCK6 , L0000001 , L0000002 , L0000003 , L0000004 , L0000005 , L0000006 , L0000007 ,
L0000008 , L0000009 , L0000010 , L0000011 , L0000012 , L0000013 , L0000014 , L0000015 ,
L0000016 , L0000017 , L0000018 , L0000019 , L0000020 , L0000021 , L0000022 , . . . ,

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

** CONC OF DPM IN MICROGRAMS/M**3 **

Y-COORD (METERS)	X-COORD (METERS)								
	479511.72	479536.72	479561.72	479586.72	479611.72	479636.72	479661.72	479686.72	479711.72
3743219.09	0.00357	0.00371	0.00377	0.00376	0.00373	0.00384	0.00457	0.00368	0.00269
3743194.09	0.00410	0.00432	0.00443	0.00442	0.00433	0.00432	0.00489	0.00396	0.00286
3743169.09	0.00481	0.00519	0.00540	0.00543	0.00521	0.00496	0.00529	0.00426	0.00303
3743144.09	0.00580	0.00660	0.00723	0.00727	0.00681	0.00609	0.00576	0.00451	0.00316
3743119.09	0.00797	0.00900	0.00997	0.00975	0.00909	0.00778	0.00664	0.00481	0.00325
3743094.09	0.00866	0.01095	0.01549	0.01493	0.01391	0.00956	0.00661	0.00499	0.00344
3743069.09	0.00876	0.01027	0.01921	0.02005	0.01891	0.01278	0.00692	0.00523	0.00360
3743044.09	0.00826	0.01004	0.01982	0.02084	0.01947	0.01365	0.00678	0.00522	0.00371
3743019.09	0.00803	0.01015	0.02033	0.02113	0.01990	0.01370	0.00676	0.00507	0.00368
3742994.09	0.00790	0.01012	0.02062	0.02146	0.01996	0.01361	0.00677	0.00500	0.00364
3742969.09	0.00794	0.01004	0.02057	0.02152	0.02004	0.01351	0.00678	0.00497	0.00362
3742944.09	0.00789	0.00995	0.02005	0.02107	0.01993	0.01334	0.00675	0.00506	0.00367
3742919.09	0.00839	0.01084	0.01941	0.02041	0.01972	0.01315	0.00676	0.00514	0.00379
3742894.09	0.00856	0.01524	0.01842	0.01926	0.01889	0.01275	0.00686	0.00524	0.00396
3742869.09	0.00721	0.01343	0.01583	0.01644	0.01608	0.01176	0.00746	0.00536	0.00398
3742844.09	0.00587	0.00855	0.00939	0.01006	0.01029	0.00951	0.00716	0.00512	0.00367
3742819.09	0.00403	0.00531	0.00651	0.00728	0.00736	0.00690	0.00584	0.00456	0.00360
3742794.09	0.00306	0.00374	0.00457	0.00516	0.00529	0.00499	0.00465	0.00414	0.00345
3742769.09	0.00252	0.00294	0.00342	0.00382	0.00404	0.00405	0.00392	0.00364	0.00320
3742744.09	0.00214	0.00245	0.00278	0.00309	0.00331	0.00338	0.00333	0.00317	0.00290
3742719.09	0.00185	0.00208	0.00233	0.00258	0.00276	0.00286	0.00286	0.00277	0.00260

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** THE PERIOD (43824 HRS) AVERAGE CONCENTRATION VALUES FOR SOURCE GROUP: ALL ***
INCLUDING SOURCE(S): STCK1 , STCK2 , STCK3 , STCK4 , STCK5 ,
STCK6 , L0000001 , L0000002 , L0000003 , L0000004 , L0000005 , L0000006 , L0000007 ,
L0000008 , L0000009 , L0000010 , L0000011 , L0000012 , L0000013 , L0000014 , L0000015 ,
L0000016 , L0000017 , L0000018 , L0000019 , L0000020 , L0000021 , L0000022 , . . . ,

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

** CONC OF DPM IN MICROGRAMS/M**3 **

Y-COORD (METERS)	X-COORD (METERS)		
	479736.72	479761.72	479786.72
3743219.09	0.00218	0.00184	0.00158
3743194.09	0.00230	0.00192	0.00164
3743169.09	0.00240	0.00198	0.00169
3743144.09	0.00249	0.00204	0.00173
3743119.09	0.00255	0.00209	0.00176
3743094.09	0.00262	0.00213	0.00178
3743069.09	0.00273	0.00217	0.00181
3743044.09	0.00284	0.00222	0.00183
3743019.09	0.00290	0.00227	0.00186
3742994.09	0.00291	0.00232	0.00189
3742969.09	0.00294	0.00234	0.00192
3742944.09	0.00302	0.00239	0.00195
3742919.09	0.00308	0.00241	0.00198
3742894.09	0.00307	0.00242	0.00200
3742869.09	0.00300	0.00242	0.00201
3742844.09	0.00294	0.00241	0.00202
3742819.09	0.00291	0.00240	0.00201
3742794.09	0.00284	0.00237	0.00200
3742769.09	0.00272	0.00231	0.00197
3742744.09	0.00255	0.00222	0.00192
3742719.09	0.00236	0.00210	0.00185

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** THE PERIOD (43824 HRS) AVERAGE CONCENTRATION VALUES FOR SOURCE GROUP: ALL ***
INCLUDING SOURCE(S): STCK1 , STCK2 , STCK3 , STCK4 , STCK5 ,
STCK6 , L0000001 , L0000002 , L0000003 , L0000004 , L0000005 , L0000006 , L0000007 ,
L0000008 , L0000009 , L0000010 , L0000011 , L0000012 , L0000013 , L0000014 , L0000015 ,
L0000016 , L0000017 , L0000018 , L0000019 , L0000020 , L0000021 , L0000022 , . . . ,

*** DISCRETE CARTESIAN RECEPTOR POINTS ***

** CONC OF DPM IN MICROGRAMS/M**3 **

X-COORD (M)	Y-COORD (M)	CONC	X-COORD (M)	Y-COORD (M)	CONC
479365.78	3743082.33	0.00220	479387.25	3743034.16	0.00269
479424.43	3742962.42	0.00388	479458.46	3742888.59	0.00402
479491.70	3742826.08	0.00352	479707.32	3742739.31	0.00289
479568.49	3743368.43	0.00191	479517.30	3743358.85	0.00195

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** THE SUMMARY OF MAXIMUM PERIOD (43824 HRS) RESULTS ***

** CONC OF DPM IN MICROGRAMS/M**3 **

GROUP ID	AVERAGE CONC	RECEPTOR (XR, YR, ZELEV, ZHILL, ZFLAG)	OF TYPE	NETWORK GRID-ID
ALL	1ST HIGHEST VALUE IS	0.02152 AT (479586.72, 3742969.09, 441.50, 441.50, 0.00)	GC	UCART1
	2ND HIGHEST VALUE IS	0.02146 AT (479586.72, 3742994.09, 441.50, 441.50, 0.00)	GC	UCART1
	3RD HIGHEST VALUE IS	0.02113 AT (479586.72, 3743019.09, 441.50, 441.50, 0.00)	GC	UCART1
	4TH HIGHEST VALUE IS	0.02107 AT (479586.72, 3742944.09, 441.40, 441.40, 0.00)	GC	UCART1
	5TH HIGHEST VALUE IS	0.02084 AT (479586.72, 3743044.09, 441.60, 441.60, 0.00)	GC	UCART1
	6TH HIGHEST VALUE IS	0.02062 AT (479561.72, 3742994.09, 441.70, 441.70, 0.00)	GC	UCART1
	7TH HIGHEST VALUE IS	0.02057 AT (479561.72, 3742969.09, 441.60, 441.60, 0.00)	GC	UCART1
	8TH HIGHEST VALUE IS	0.02041 AT (479586.72, 3742919.09, 441.40, 441.40, 0.00)	GC	UCART1
	9TH HIGHEST VALUE IS	0.02033 AT (479561.72, 3743019.09, 441.70, 441.70, 0.00)	GC	UCART1
	10TH HIGHEST VALUE IS	0.02005 AT (479561.72, 3742944.09, 441.50, 441.50, 0.00)	GC	UCART1

*** RECEPTOR TYPES: GC = GRIDCART
GP = GRIDPOLR
DC = DISCCART
DP = DISCPOLR

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** Message Summary : AERMOD Model Execution ***

--------- Summary of Total Messages --------

```
A Total of            0 Fatal Error Message(s)
A Total of           10 Warning Message(s)
A Total of         2028 Informational Message(s)

A Total of        43824 Hours Were Processed

A Total of          978 Calm Hours Identified

A Total of         1050 Missing Hours Identified (  2.40 Percent)


   ******** FATAL ERROR MESSAGES ********
             ***  NONE  ***


   ********   WARNING MESSAGES   ********
SO W320     290        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
SO W320     291        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
SO W320     292        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
SO W320     293        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
SO W320     294        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
SO W320     295        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
ME W186     719       MEOPEN: THRESH_1MIN 1-min ASOS wind speed threshold used          0.50
ME W187     719       MEOPEN: ADJ_U* Option for Stable Low Winds used in AERMET
MX W450   17521       CHKDAT: Record Out of Sequence in Meteorological File at:     14010101
MX W450   17521       CHKDAT: Record Out of Sequence in Meteorological File at:    2 year gap

   ***********************************
   *** AERMOD Finishes Successfully ***
   ***********************************
```

```
** Lakes Environmental AERMOD MPI
**
**************************************
**
** AERMOD Input Produced by:
** AERMOD View Ver. 11.2.0
** Lakes Environmental Software Inc.
** Date: 4/4/2023
** File: C:\Lakes\AERMOD View\19370 Redlands Avenue West 2YR\19370 Redlands Avenue West 2YR.ADI
**
**************************************
**
**
**************************************
** AERMOD Control Pathway
**************************************
**
**
CO STARTING
   TITLEONE 19370 Redlands Avenue West  - new site plan
   TITLETWO DPM Conc 2024-25 2YR
   MODELOPT DFAULT CONC
   AVERTIME PERIOD
   URBANOPT 2189641 Riverside_County
   POLLUTID DPM
   RUNORNOT RUN
   ERRORFIL "19370 Relands Avenue West 2YR.err"
CO FINISHED
**
**************************************
** AERMOD Source Pathway
**************************************
**
**
SO STARTING
** Source Location **
** Source ID - Type - X Coord. - Y Coord. **
   LOCATION STCK1        POINT      479650.520  3743097.530      441.230
** DESCRSRC Idling location
   LOCATION STCK2        POINT      479648.780  3742857.061      441.140
** DESCRSRC Idling location
   LOCATION STCK3        POINT      479532.538  3743072.983      441.920
** DESCRSRC Idling location
   LOCATION STCK4        POINT      479531.377  3743020.952      441.800
** DESCRSRC Idling location
   LOCATION STCK5        POINT      479529.519  3742977.748      441.680
** DESCRSRC Idling location
   LOCATION STCK6        POINT      479530.216  3742931.060      441.680
** DESCRSRC Idling location
** ----------------------------------------------------------------------
** Line Source Represented by Adjacent Volume Sources
```

```
** LINE VOLUME Source ID = SLINE1
** DESCRSRC Onsite truck travel
** PREFIX
** Length of Side = 8.59
** Configuration = Adjacent
** Emission Rate = 0.0000156
** Elevated
** Building Height = 10.97
** SZINIT = 5.10
** Nodes = 11
** 479659.651, 3742857.442, 441.11, 3.50, 4.00
** 479633.553, 3742854.794, 441.08, 3.50, 4.00
** 479531.052, 3742855.929, 441.83, 3.50, 4.00
** 479520.840, 3742857.442, 441.83, 3.50, 4.00
** 479472.804, 3742961.834, 441.98, 3.50, 4.00
** 479458.809, 3742999.658, 442.03, 3.50, 4.00
** 479461.079, 3743039.750, 442.18, 3.50, 4.00
** 479470.535, 3743073.413, 441.94, 3.50, 4.00
** 479507.980, 3743094.594, 441.71, 3.50, 4.00
** 479548.451, 3743101.024, 441.34, 3.50, 4.00
** 479661.543, 3743099.511, 441.23, 3.50, 4.00
** ----------------------------------------------------------------------
   LOCATION L0000239     VOLUME   479655.378 3742857.008 441.14
   LOCATION L0000240     VOLUME   479646.831 3742856.141 441.13
   LOCATION L0000241     VOLUME   479638.284 3742855.274 441.12
   LOCATION L0000242     VOLUME   479629.718 3742854.837 441.11
   LOCATION L0000243     VOLUME   479621.128 3742854.932 441.12
   LOCATION L0000244     VOLUME   479612.537 3742855.027 441.14
   LOCATION L0000245     VOLUME   479603.947 3742855.122 441.15
   LOCATION L0000246     VOLUME   479595.357 3742855.217 441.29
   LOCATION L0000247     VOLUME   479586.766 3742855.312 441.44
   LOCATION L0000248     VOLUME   479578.176 3742855.407 441.58
   LOCATION L0000249     VOLUME   479569.586 3742855.502 441.65
   LOCATION L0000250     VOLUME   479560.996 3742855.597 441.72
   LOCATION L0000251     VOLUME   479552.405 3742855.692 441.79
   LOCATION L0000252     VOLUME   479543.815 3742855.788 441.80
   LOCATION L0000253     VOLUME   479535.225 3742855.883 441.81
   LOCATION L0000254     VOLUME   479526.682 3742856.576 441.82
   LOCATION L0000255     VOLUME   479519.717 3742859.881 441.83
   LOCATION L0000256     VOLUME   479516.126 3742867.685 441.83
   LOCATION L0000257     VOLUME   479512.535 3742875.489 441.85
   LOCATION L0000258     VOLUME   479508.944 3742883.294 441.86
   LOCATION L0000259     VOLUME   479505.353 3742891.098 441.84
   LOCATION L0000260     VOLUME   479501.762 3742898.902 441.83
   LOCATION L0000261     VOLUME   479498.171 3742906.706 441.80
   LOCATION L0000262     VOLUME   479494.580 3742914.510 441.78
   LOCATION L0000263     VOLUME   479490.989 3742922.315 441.84
   LOCATION L0000264     VOLUME   479487.398 3742930.119 441.89
   LOCATION L0000265     VOLUME   479483.807 3742937.923 441.95
   LOCATION L0000266     VOLUME   479480.216 3742945.727 442.00
   LOCATION L0000267     VOLUME   479476.625 3742953.532 441.98
```

```
   LOCATION L0000268     VOLUME   479473.033 3742961.336 441.97
   LOCATION L0000269     VOLUME   479470.013 3742969.377 441.95
   LOCATION L0000270     VOLUME   479467.032 3742977.434 441.95
   LOCATION L0000271     VOLUME   479464.051 3742985.491 441.98
   LOCATION L0000272     VOLUME   479461.070 3742993.548 442.00
   LOCATION L0000273     VOLUME   479458.927 3743001.730 442.03
   LOCATION L0000274     VOLUME   479459.412 3743010.307 442.06
   LOCATION L0000275     VOLUME   479459.898 3743018.884 442.10
   LOCATION L0000276     VOLUME   479460.383 3743027.461 442.15
   LOCATION L0000277     VOLUME   479460.869 3743036.039 442.19
   LOCATION L0000278     VOLUME   479462.397 3743044.442 442.13
   LOCATION L0000279     VOLUME   479464.720 3743052.713 442.06
   LOCATION L0000280     VOLUME   479467.043 3743060.983 442.00
   LOCATION L0000281     VOLUME   479469.366 3743069.254 441.95
   LOCATION L0000282     VOLUME   479474.252 3743075.516 441.92
   LOCATION L0000283     VOLUME   479481.729 3743079.745 441.90
   LOCATION L0000284     VOLUME   479489.207 3743083.975 441.87
   LOCATION L0000285     VOLUME   479496.684 3743088.205 441.81
   LOCATION L0000286     VOLUME   479504.162 3743092.434 441.74
   LOCATION L0000287     VOLUME   479512.132 3743095.254 441.67
   LOCATION L0000288     VOLUME   479520.616 3743096.602 441.61
   LOCATION L0000289     VOLUME   479529.101 3743097.950 441.56
   LOCATION L0000290     VOLUME   479537.585 3743099.298 441.50
   LOCATION L0000291     VOLUME   479546.069 3743100.646 441.43
   LOCATION L0000292     VOLUME   479554.630 3743100.941 441.40
   LOCATION L0000293     VOLUME   479563.220 3743100.827 441.36
   LOCATION L0000294     VOLUME   479571.810 3743100.712 441.32
   LOCATION L0000295     VOLUME   479580.400 3743100.597 441.28
   LOCATION L0000296     VOLUME   479588.990 3743100.482 441.26
   LOCATION L0000297     VOLUME   479597.580 3743100.367 441.23
   LOCATION L0000298     VOLUME   479606.170 3743100.252 441.21
   LOCATION L0000299     VOLUME   479614.760 3743100.137 441.19
   LOCATION L0000300     VOLUME   479623.350 3743100.022 441.17
   LOCATION L0000301     VOLUME   479631.940 3743099.907 441.16
   LOCATION L0000302     VOLUME   479640.530 3743099.792 441.16
   LOCATION L0000303     VOLUME   479649.120 3743099.677 441.16
   LOCATION L0000304     VOLUME   479657.710 3743099.562 441.16
** End of LINE VOLUME Source ID = SLINE1
** ----------------------------------------------------------------------
** Line Source Represented by Adjacent Volume Sources
** LINE VOLUME Source ID = SLINE2
** DESCRSRC Redlands Ave southern project driveway to northern project driveway
** PREFIX
** Length of Side = 8.59
** Configuration = Adjacent
** Emission Rate = 1.46E-06
** Elevated
** Vertical Dimension = 7.00
** SZINIT = 1.63
** Nodes = 3
** 479668.640, 3742857.589, 441.06, 3.50, 4.00
```

```
** 479670.318, 3742876.889, 441.14, 3.50, 4.00
** 479670.328, 3743099.110, 441.22, 3.50, 4.00
** ----------------------------------------------------------------------
   LOCATION L0000305     VOLUME   479669.012 3742861.868 441.08
   LOCATION L0000306     VOLUME   479669.756 3742870.427 441.10
   LOCATION L0000307     VOLUME   479670.318 3742878.993 441.13
   LOCATION L0000308     VOLUME   479670.319 3742887.584 441.14
   LOCATION L0000309     VOLUME   479670.319 3742896.175 441.13
   LOCATION L0000310     VOLUME   479670.320 3742904.766 441.13
   LOCATION L0000311     VOLUME   479670.320 3742913.356 441.12
   LOCATION L0000312     VOLUME   479670.320 3742921.947 441.09
   LOCATION L0000313     VOLUME   479670.321 3742930.538 441.06
   LOCATION L0000314     VOLUME   479670.321 3742939.129 441.04
   LOCATION L0000315     VOLUME   479670.322 3742947.720 441.02
   LOCATION L0000316     VOLUME   479670.322 3742956.310 441.02
   LOCATION L0000317     VOLUME   479670.322 3742964.901 441.02
   LOCATION L0000318     VOLUME   479670.323 3742973.492 441.02
   LOCATION L0000319     VOLUME   479670.323 3742982.083 441.05
   LOCATION L0000320     VOLUME   479670.323 3742990.674 441.09
   LOCATION L0000321     VOLUME   479670.324 3742999.264 441.12
   LOCATION L0000322     VOLUME   479670.324 3743007.855 441.16
   LOCATION L0000323     VOLUME   479670.325 3743016.446 441.20
   LOCATION L0000324     VOLUME   479670.325 3743025.037 441.23
   LOCATION L0000325     VOLUME   479670.325 3743033.628 441.27
   LOCATION L0000326     VOLUME   479670.326 3743042.218 441.30
   LOCATION L0000327     VOLUME   479670.326 3743050.809 441.33
   LOCATION L0000328     VOLUME   479670.327 3743059.400 441.35
   LOCATION L0000329     VOLUME   479670.327 3743067.991 441.37
   LOCATION L0000330     VOLUME   479670.327 3743076.582 441.32
   LOCATION L0000331     VOLUME   479670.328 3743085.172 441.28
   LOCATION L0000332     VOLUME   479670.328 3743093.763 441.23
** End of LINE VOLUME Source ID = SLINE2
** ----------------------------------------------------------------------
** Line Source Represented by Adjacent Volume Sources
** LINE VOLUME Source ID = SLINE3
** DESCRSRC Redlands Ave north of northern project driveway
** PREFIX
** Length of Side = 8.59
** Configuration = Adjacent
** Emission Rate = 8.14E-06
** Elevated
** Vertical Dimension = 7.00
** SZINIT = 1.63
** Nodes = 10
** 479670.085, 3743103.428, 441.03, 3.50, 4.00
** 479666.590, 3743250.337, 441.29, 3.50, 4.00
** 479665.586, 3743329.579, 440.69, 3.50, 4.00
** 479667.593, 3743384.748, 440.26, 3.50, 4.00
** 479673.611, 3743417.849, 439.90, 3.50, 4.00
** 479686.651, 3743467.000, 440.36, 3.50, 4.00
** 479693.672, 3743507.123, 440.49, 3.50, 4.00
```

```
** 479698.688, 3743551.258, 440.18, 3.50, 4.00
** 479700.694, 3743608.433, 439.59, 3.50, 4.00
** 479699.691, 3743771.933, 440.59, 3.50, 4.00
** ----------------------------------------------------------------
   LOCATION L0000333     VOLUME   479669.983 3743107.722 440.88
   LOCATION L0000334     VOLUME   479669.778 3743116.311 440.60
   LOCATION L0000335     VOLUME   479669.574 3743124.899 440.32
   LOCATION L0000336     VOLUME   479669.370 3743133.487 440.33
   LOCATION L0000337     VOLUME   479669.165 3743142.076 440.54
   LOCATION L0000338     VOLUME   479668.961 3743150.664 440.76
   LOCATION L0000339     VOLUME   479668.757 3743159.252 440.97
   LOCATION L0000340     VOLUME   479668.552 3743167.841 441.00
   LOCATION L0000341     VOLUME   479668.348 3743176.429 441.02
   LOCATION L0000342     VOLUME   479668.144 3743185.017 441.04
   LOCATION L0000343     VOLUME   479667.939 3743193.606 441.09
   LOCATION L0000344     VOLUME   479667.735 3743202.194 441.16
   LOCATION L0000345     VOLUME   479667.531 3743210.783 441.24
   LOCATION L0000346     VOLUME   479667.326 3743219.371 441.31
   LOCATION L0000347     VOLUME   479667.122 3743227.959 441.32
   LOCATION L0000348     VOLUME   479666.918 3743236.548 441.32
   LOCATION L0000349     VOLUME   479666.713 3743245.136 441.31
   LOCATION L0000350     VOLUME   479666.547 3743253.725 441.29
   LOCATION L0000351     VOLUME   479666.438 3743262.315 441.23
   LOCATION L0000352     VOLUME   479666.329 3743270.905 441.16
   LOCATION L0000353     VOLUME   479666.220 3743279.495 441.09
   LOCATION L0000354     VOLUME   479666.112 3743288.086 440.97
   LOCATION L0000355     VOLUME   479666.003 3743296.676 440.83
   LOCATION L0000356     VOLUME   479665.894 3743305.266 440.68
   LOCATION L0000357     VOLUME   479665.785 3743313.856 440.55
   LOCATION L0000358     VOLUME   479665.677 3743322.446 440.61
   LOCATION L0000359     VOLUME   479665.639 3743331.035 440.67
   LOCATION L0000360     VOLUME   479665.952 3743339.620 440.74
   LOCATION L0000361     VOLUME   479666.264 3743348.206 440.74
   LOCATION L0000362     VOLUME   479666.576 3743356.791 440.68
   LOCATION L0000363     VOLUME   479666.888 3743365.376 440.62
   LOCATION L0000364     VOLUME   479667.200 3743373.961 440.56
   LOCATION L0000365     VOLUME   479667.513 3743382.546 440.37
   LOCATION L0000366     VOLUME   479668.735 3743391.032 440.18
   LOCATION L0000367     VOLUME   479670.272 3743399.485 440.00
   LOCATION L0000368     VOLUME   479671.809 3743407.937 439.84
   LOCATION L0000369     VOLUME   479673.345 3743416.389 439.72
   LOCATION L0000370     VOLUME   479675.433 3743424.718 439.60
   LOCATION L0000371     VOLUME   479677.636 3743433.022 439.47
   LOCATION L0000372     VOLUME   479679.839 3743441.325 439.57
   LOCATION L0000373     VOLUME   479682.042 3743449.629 439.84
   LOCATION L0000374     VOLUME   479684.245 3743457.932 440.09
   LOCATION L0000375     VOLUME   479686.448 3743466.236 440.34
   LOCATION L0000376     VOLUME   479687.996 3743474.684 440.41
   LOCATION L0000377     VOLUME   479689.476 3743483.146 440.45
   LOCATION L0000378     VOLUME   479690.957 3743491.608 440.49
   LOCATION L0000379     VOLUME   479692.438 3743500.070 440.51
```

```
   LOCATION L0000380     VOLUME   479693.834 3743508.545 440.49
   LOCATION L0000381     VOLUME   479694.804 3743517.081 440.46
   LOCATION L0000382     VOLUME   479695.774 3743525.616 440.43
   LOCATION L0000383     VOLUME   479696.744 3743534.152 440.38
   LOCATION L0000384     VOLUME   479697.714 3743542.688 440.30
   LOCATION L0000385     VOLUME   479698.684 3743551.224 440.23
   LOCATION L0000386     VOLUME   479698.988 3743559.809 440.15
   LOCATION L0000387     VOLUME   479699.289 3743568.395 440.13
   LOCATION L0000388     VOLUME   479699.590 3743576.980 440.11
   LOCATION L0000389     VOLUME   479699.892 3743585.566 440.08
   LOCATION L0000390     VOLUME   479700.193 3743594.151 439.99
   LOCATION L0000391     VOLUME   479700.494 3743602.737 439.82
   LOCATION L0000392     VOLUME   479700.676 3743611.324 439.65
   LOCATION L0000393     VOLUME   479700.623 3743619.915 439.48
   LOCATION L0000394     VOLUME   479700.571 3743628.505 439.44
   LOCATION L0000395     VOLUME   479700.518 3743637.096 439.43
   LOCATION L0000396     VOLUME   479700.465 3743645.687 439.42
   LOCATION L0000397     VOLUME   479700.413 3743654.277 439.51
   LOCATION L0000398     VOLUME   479700.360 3743662.868 439.86
   LOCATION L0000399     VOLUME   479700.307 3743671.459 440.21
   LOCATION L0000400     VOLUME   479700.255 3743680.049 440.56
   LOCATION L0000401     VOLUME   479700.202 3743688.640 440.67
   LOCATION L0000402     VOLUME   479700.149 3743697.230 440.68
   LOCATION L0000403     VOLUME   479700.096 3743705.821 440.68
   LOCATION L0000404     VOLUME   479700.044 3743714.412 440.67
   LOCATION L0000405     VOLUME   479699.991 3743723.002 440.55
   LOCATION L0000406     VOLUME   479699.938 3743731.593 440.43
   LOCATION L0000407     VOLUME   479699.886 3743740.184 440.30
   LOCATION L0000408     VOLUME   479699.833 3743748.774 440.31
   LOCATION L0000409     VOLUME   479699.780 3743757.365 440.43
   LOCATION L0000410     VOLUME   479699.728 3743765.956 440.56
** End of LINE VOLUME Source ID = SLINE3
   LOCATION PAREA1       AREAPOLY   479547.338  3743092.751      441.610
** DESCRSRC Emergency pumps and back-up generator
** Source Parameters **
   SRCPARAM STCK1         0.000012     3.500   366.000    51.816       0.1
   SRCPARAM STCK2         0.000012     3.500   366.000    51.816       0.1
   SRCPARAM STCK3         0.000012     3.500   366.000    51.816       0.1
   SRCPARAM STCK4         0.000012     3.500   366.000    51.816       0.1
   SRCPARAM STCK5         0.000012     3.500   366.000    51.816       0.1
   SRCPARAM STCK6         0.000012     3.500   366.000    51.816       0.1
** LINE VOLUME Source ID = SLINE1
   SRCPARAM L0000239     0.0000002364      3.50      4.00      5.10
   SRCPARAM L0000240     0.0000002364      3.50      4.00      5.10
   SRCPARAM L0000241     0.0000002364      3.50      4.00      5.10
   SRCPARAM L0000242     0.0000002364      3.50      4.00      5.10
   SRCPARAM L0000243     0.0000002364      3.50      4.00      5.10
   SRCPARAM L0000244     0.0000002364      3.50      4.00      5.10
   SRCPARAM L0000245     0.0000002364      3.50      4.00      5.10
   SRCPARAM L0000246     0.0000002364      3.50      4.00      5.10
   SRCPARAM L0000247     0.0000002364      3.50      4.00      5.10
```

```
SRCPARAM L0000248     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000249     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000250     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000251     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000252     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000253     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000254     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000255     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000256     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000257     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000258     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000259     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000260     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000261     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000262     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000263     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000264     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000265     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000266     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000267     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000268     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000269     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000270     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000271     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000272     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000273     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000274     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000275     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000276     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000277     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000278     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000279     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000280     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000281     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000282     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000283     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000284     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000285     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000286     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000287     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000288     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000289     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000290     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000291     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000292     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000293     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000294     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000295     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000296     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000297     0.0000002364      3.50      4.00      5.10
SRCPARAM L0000298     0.0000002364      3.50      4.00      5.10
```

```
   SRCPARAM L0000299     0.0000002364      3.50      4.00      5.10
   SRCPARAM L0000300     0.0000002364      3.50      4.00      5.10
   SRCPARAM L0000301     0.0000002364      3.50      4.00      5.10
   SRCPARAM L0000302     0.0000002364      3.50      4.00      5.10
   SRCPARAM L0000303     0.0000002364      3.50      4.00      5.10
   SRCPARAM L0000304     0.0000002364      3.50      4.00      5.10
** ------------------------------------------------------------------
** LINE VOLUME Source ID = SLINE2
   SRCPARAM L0000305     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000306     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000307     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000308     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000309     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000310     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000311     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000312     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000313     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000314     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000315     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000316     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000317     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000318     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000319     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000320     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000321     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000322     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000323     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000324     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000325     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000326     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000327     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000328     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000329     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000330     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000331     0.00000005214      3.50      4.00      1.63
   SRCPARAM L0000332     0.00000005214      3.50      4.00      1.63
** ------------------------------------------------------------------
** LINE VOLUME Source ID = SLINE3
   SRCPARAM L0000333     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000334     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000335     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000336     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000337     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000338     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000339     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000340     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000341     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000342     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000343     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000344     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000345     0.0000001044      3.50      4.00      1.63
```

```
SRCPARAM L0000346     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000347     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000348     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000349     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000350     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000351     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000352     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000353     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000354     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000355     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000356     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000357     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000358     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000359     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000360     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000361     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000362     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000363     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000364     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000365     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000366     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000367     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000368     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000369     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000370     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000371     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000372     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000373     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000374     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000375     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000376     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000377     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000378     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000379     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000380     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000381     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000382     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000383     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000384     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000385     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000386     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000387     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000388     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000389     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000390     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000391     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000392     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000393     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000394     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000395     0.0000001044      3.50      4.00      1.63
SRCPARAM L0000396     0.0000001044      3.50      4.00      1.63
```

```
   SRCPARAM L0000397     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000398     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000399     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000400     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000401     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000402     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000403     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000404     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000405     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000406     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000407     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000408     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000409     0.0000001044      3.50      4.00      1.63
   SRCPARAM L0000410     0.0000001044      3.50      4.00      1.63
** ------------------------------------------------------------------
   SRCPARAM PAREA1       1.1741E-09     0.914        14
   AREAVERT PAREA1       479547.338 3743092.751 479616.111 3743092.448
   AREAVERT PAREA1       479617.323 3743090.631 479629.442 3743090.631
   AREAVERT PAREA1       479629.442 3743090.025 479635.963 3743089.709
   AREAVERT PAREA1       479637.980 3743055.833 479636.098 3742875.967
   AREAVERT PAREA1       479635.425 3742866.557 479616.471 3742865.347
   AREAVERT PAREA1       479613.782 3742863.599 479530.974 3742864.675
   AREAVERT PAREA1       479530.974 3742911.725 479545.492 3742911.187

** Building Downwash **
   BUILDHGT STCK1          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK1          10.97    10.97    10.97     0.00     0.00     0.00
   BUILDHGT STCK1           0.00     0.00     0.00     0.00     0.00     0.00
   BUILDHGT STCK1          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK1          10.97    10.97    10.97     0.00     0.00     0.00
   BUILDHGT STCK1           0.00     0.00     0.00     0.00     0.00     0.00

   BUILDHGT STCK2           0.00     0.00     0.00     0.00     0.00     0.00
   BUILDHGT STCK2           0.00     0.00     0.00    10.97    10.97    10.97
   BUILDHGT STCK2          10.97    10.97    10.97    10.97    10.97     0.00
   BUILDHGT STCK2           0.00     0.00     0.00     0.00     0.00     0.00
   BUILDHGT STCK2           0.00     0.00     0.00    10.97    10.97    10.97
   BUILDHGT STCK2          10.97    10.97    10.97    10.97    10.97     0.00

   BUILDHGT STCK3           0.00     0.00    10.97    10.97    10.97    10.97
   BUILDHGT STCK3          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK3          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK3           0.00     0.00    10.97    10.97    10.97    10.97
   BUILDHGT STCK3          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK3          10.97    10.97    10.97    10.97    10.97    10.97

   BUILDHGT STCK4          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK4          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK4          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK4          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK4          10.97    10.97    10.97    10.97    10.97    10.97
```

```
BUILDHGT STCK4          10.97    10.97    10.97    10.97    10.97    10.97

BUILDHGT STCK5          10.97    10.97    10.97    10.97    10.97    10.97
BUILDHGT STCK5          10.97    10.97    10.97    10.97    10.97    10.97
BUILDHGT STCK5          10.97    10.97    10.97    10.97    10.97    10.97
BUILDHGT STCK5          10.97    10.97    10.97    10.97    10.97    10.97
BUILDHGT STCK5          10.97    10.97    10.97    10.97    10.97    10.97
BUILDHGT STCK5          10.97    10.97    10.97    10.97    10.97    10.97

BUILDHGT STCK6          10.97    10.97    10.97    10.97    10.97    10.97
BUILDHGT STCK6          10.97    10.97    10.97    10.97    10.97    10.97
BUILDHGT STCK6          10.97    10.97    10.97    10.97    10.97    10.97
BUILDHGT STCK6          10.97    10.97    10.97    10.97    10.97    10.97
BUILDHGT STCK6          10.97    10.97    10.97    10.97    10.97    10.97
BUILDHGT STCK6          10.97    10.97    10.97    10.97    10.97    10.97

BUILDWID STCK1         126.83   161.07   190.42   213.98   231.04   241.08
BUILDWID STCK1         243.80   239.11   229.94     0.00     0.00     0.00
BUILDWID STCK1           0.00     0.00     0.00     0.00     0.00     0.00
BUILDWID STCK1         126.83   161.07   190.42   213.98   231.04   241.08
BUILDWID STCK1         243.80   239.11   229.94     0.00     0.00     0.00
BUILDWID STCK1           0.00     0.00     0.00     0.00     0.00     0.00

BUILDWID STCK2           0.00     0.00     0.00     0.00     0.00     0.00
BUILDWID STCK2           0.00     0.00     0.00   240.65   247.69   247.71
BUILDWID STCK2         240.21   225.41   203.76   175.92   142.73     0.00
BUILDWID STCK2           0.00     0.00     0.00     0.00     0.00     0.00
BUILDWID STCK2           0.00     0.00     0.00   240.65   247.69   247.71
BUILDWID STCK2         240.21   225.41   203.76   175.92   142.73     0.00

BUILDWID STCK3           0.00     0.00   190.42   213.98   231.04   241.08
BUILDWID STCK3         243.80   239.11   229.94   240.65   247.69   247.71
BUILDWID STCK3         240.21   225.41   203.76   175.92   142.73   107.53
BUILDWID STCK3           0.00     0.00   190.42   213.98   231.04   241.08
BUILDWID STCK3         243.80   239.11   229.94   240.65   247.69   247.71
BUILDWID STCK3         240.21   225.41   203.76   175.92   142.73   107.53

BUILDWID STCK4         126.83   161.07   190.42   213.98   231.04   241.08
BUILDWID STCK4         243.80   239.11   229.94   240.65   247.69   247.71
BUILDWID STCK4         240.21   225.41   203.76   175.92   142.73   107.53
BUILDWID STCK4         126.83   161.07   190.42   213.98   231.04   241.08
BUILDWID STCK4         243.80   239.11   229.94   240.65   247.69   247.71
BUILDWID STCK4         240.21   225.41   203.76   175.92   142.73   107.53

BUILDWID STCK5         126.83   161.07   190.42   213.98   231.04   241.08
BUILDWID STCK5         243.80   239.11   229.94   240.65   247.69   247.71
BUILDWID STCK5         240.21   225.41   203.76   175.92   142.73   107.53
BUILDWID STCK5         126.83   161.07   190.42   213.98   231.04   241.08
BUILDWID STCK5         243.80   239.11   229.94   240.65   247.69   247.71
BUILDWID STCK5         240.21   225.41   203.76   175.92   142.73   107.53
```

```
BUILDWID STCK6          126.83   161.07   190.42   213.98   231.04   241.08
BUILDWID STCK6          243.80   239.11   229.94   240.65   247.69   247.71
BUILDWID STCK6          240.21   225.41   203.76   175.92   142.73   107.53
BUILDWID STCK6          126.83   161.07   190.42   213.98   231.04   241.08
BUILDWID STCK6          243.80   239.11   229.94   240.65   247.69   247.71
BUILDWID STCK6          240.21   225.41   203.76   175.92   142.73   107.53

BUILDLEN STCK1          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK1          175.92   142.73   107.53     0.00     0.00     0.00
BUILDLEN STCK1            0.00     0.00     0.00     0.00     0.00     0.00
BUILDLEN STCK1          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK1          175.92   142.73   107.53     0.00     0.00     0.00
BUILDLEN STCK1            0.00     0.00     0.00     0.00     0.00     0.00

BUILDLEN STCK2            0.00     0.00     0.00     0.00     0.00     0.00
BUILDLEN STCK2            0.00     0.00     0.00   126.83   161.07   190.42
BUILDLEN STCK2          213.98   231.04   241.08   243.80   239.11     0.00
BUILDLEN STCK2            0.00     0.00     0.00     0.00     0.00     0.00
BUILDLEN STCK2            0.00     0.00     0.00   126.83   161.07   190.42
BUILDLEN STCK2          213.98   231.04   241.08   243.80   239.11     0.00

BUILDLEN STCK3            0.00     0.00   247.71   240.21   225.41   203.76
BUILDLEN STCK3          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK3          213.98   231.04   241.08   243.80   239.11   229.94
BUILDLEN STCK3            0.00     0.00   247.71   240.21   225.41   203.76
BUILDLEN STCK3          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK3          213.98   231.04   241.08   243.80   239.11   229.94

BUILDLEN STCK4          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK4          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK4          213.98   231.04   241.08   243.80   239.11   229.94
BUILDLEN STCK4          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK4          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK4          213.98   231.04   241.08   243.80   239.11   229.94

BUILDLEN STCK5          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK5          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK5          213.98   231.04   241.08   243.80   239.11   229.94
BUILDLEN STCK5          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK5          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK5          213.98   231.04   241.08   243.80   239.11   229.94

BUILDLEN STCK6          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK6          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK6          213.98   231.04   241.08   243.80   239.11   229.94
BUILDLEN STCK6          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK6          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK6          213.98   231.04   241.08   243.80   239.11   229.94

XBADJ    STCK1         -250.34  -259.98  -261.73  -255.52  -241.55  -220.23
XBADJ    STCK1         -192.23  -158.39  -119.73     0.00     0.00     0.00
```

XBADJ	STCK1	0.00	0.00	0.00	0.00	0.00	0.00
XBADJ	STCK1	9.69	12.30	14.02	15.31	16.14	16.47
XBADJ	STCK1	16.31	15.65	12.20	0.00	0.00	0.00
XBADJ	STCK1	0.00	0.00	0.00	0.00	0.00	0.00
XBADJ	STCK2	0.00	0.00	0.00	0.00	0.00	0.00
XBADJ	STCK2	0.00	0.00	0.00	-141.66	-176.81	-206.59
XBADJ	STCK2	-230.09	-246.60	-255.62	-256.87	-250.32	0.00
XBADJ	STCK2	0.00	0.00	0.00	0.00	0.00	0.00
XBADJ	STCK2	0.00	0.00	0.00	14.83	15.74	16.17
XBADJ	STCK2	16.11	15.56	14.54	13.07	11.21	0.00
XBADJ	STCK3	0.00	0.00	-181.48	-160.88	-135.39	-105.79
XBADJ	STCK3	-72.97	-37.94	-1.75	10.31	6.27	2.04
XBADJ	STCK3	-2.25	-6.48	-10.51	-14.22	-17.49	-20.24
XBADJ	STCK3	0.00	0.00	-66.24	-79.33	-90.02	-97.97
XBADJ	STCK3	-102.95	-104.80	-105.78	-137.14	-167.34	-192.46
XBADJ	STCK3	-211.73	-224.56	-230.57	-229.58	-221.61	-209.70
XBADJ	STCK4	-154.23	-147.27	-135.84	-120.27	-101.05	-78.77
XBADJ	STCK4	-54.08	-27.76	-0.59	2.42	-10.43	-22.97
XBADJ	STCK4	-34.81	-45.59	-54.99	-62.71	-68.53	-72.27
XBADJ	STCK4	-86.42	-100.41	-111.88	-119.94	-124.35	-124.99
XBADJ	STCK4	-121.83	-114.97	-106.94	-129.25	-150.63	-167.45
XBADJ	STCK4	-179.17	-185.45	-186.10	-181.09	-170.57	-157.67
XBADJ	STCK5	-111.37	-106.04	-97.49	-85.98	-71.86	-55.56
XBADJ	STCK5	-37.56	-18.43	1.27	-3.25	-23.46	-42.96
XBADJ	STCK5	-61.15	-77.49	-91.47	-102.67	-110.75	-115.47
XBADJ	STCK5	-129.29	-141.65	-150.22	-154.23	-153.55	-148.20
XBADJ	STCK5	-138.36	-124.31	-108.80	-123.58	-137.61	-147.46
XBADJ	STCK5	-152.83	-153.55	-149.61	-141.13	-128.35	-114.47
XBADJ	STCK6	-65.51	-62.41	-57.41	-50.67	-42.39	-32.82
XBADJ	STCK6	-22.25	-11.01	0.57	-12.05	-40.09	-66.91
XBADJ	STCK6	-91.70	-113.71	-132.25	-146.79	-156.86	-162.16
XBADJ	STCK6	-175.14	-185.28	-190.30	-189.54	-183.02	-170.94
XBADJ	STCK6	-153.67	-131.73	-108.10	-114.78	-120.98	-123.51
XBADJ	STCK6	-122.28	-117.34	-108.83	-97.01	-82.25	-67.78
YBADJ	STCK1	38.20	15.66	-7.35	-30.14	-52.01	-72.30
YBADJ	STCK1	-90.40	-105.75	-119.28	0.00	0.00	0.00
YBADJ	STCK1	0.00	0.00	0.00	0.00	0.00	0.00
YBADJ	STCK1	-38.20	-15.66	7.35	30.14	52.01	72.30
YBADJ	STCK1	90.40	105.75	119.28	0.00	0.00	0.00
YBADJ	STCK1	0.00	0.00	0.00	0.00	0.00	0.00
YBADJ	STCK2	0.00	0.00	0.00	0.00	0.00	0.00
YBADJ	STCK2	0.00	0.00	0.00	107.11	90.42	71.25
YBADJ	STCK2	49.92	27.06	3.39	-20.39	-43.55	0.00
YBADJ	STCK2	0.00	0.00	0.00	0.00	0.00	0.00

```
   YBADJ    STCK2            0.00     0.00     0.00  -107.11   -90.42   -71.25
   YBADJ    STCK2          -49.92   -27.06    -3.39    20.39    43.55     0.00

   YBADJ    STCK3            0.00     0.00   -97.25  -104.74  -109.04  -110.03
   YBADJ    STCK3         -107.68  -102.06   -94.73   -85.35   -72.72   -57.62
   YBADJ    STCK3          -40.77   -22.68    -3.91    14.99    33.43    52.02
   YBADJ    STCK3            0.00     0.00    97.25   104.74   109.04   110.03
   YBADJ    STCK3          107.68   102.06    94.73    85.35    72.72    57.62
   YBADJ    STCK3           40.77    22.68     3.91   -14.99   -33.43   -52.02

   YBADJ    STCK4          -65.83   -70.10   -72.24   -72.18   -69.93   -65.55
   YBADJ    STCK4          -59.19   -51.02   -42.70   -33.91   -23.43   -11.98
   YBADJ    STCK4           -0.17    11.65    23.11    33.88    43.61    53.18
   YBADJ    STCK4           65.83    70.10    72.24    72.18    69.93    65.55
   YBADJ    STCK4           59.19    51.02    42.70    33.91    23.43    11.98
   YBADJ    STCK4            0.17   -11.65   -23.11   -33.88   -43.61   -53.18

   YBADJ    STCK5          -60.16   -57.07   -52.25   -45.84   -38.03   -29.07
   YBADJ    STCK5          -19.23    -8.80     0.50     8.96    17.80    26.36
   YBADJ    STCK5           34.12    40.84    46.32    50.40    52.94    55.03
   YBADJ    STCK5           60.16    57.07    52.25    45.84    38.03    29.07
   YBADJ    STCK5           19.23     8.80    -0.50    -8.96   -17.80   -26.36
   YBADJ    STCK5          -34.12   -40.84   -46.32   -50.40   -52.94   -55.03

   YBADJ    STCK6          -51.37   -40.45   -28.30   -15.29    -1.82    11.71
   YBADJ    STCK6           24.89    37.30    47.19    54.82    61.44    66.45
   YBADJ    STCK6           69.44    70.32    69.06    65.71    60.36    54.33
   YBADJ    STCK6           51.37    40.45    28.30    15.29     1.81   -11.71
   YBADJ    STCK6          -24.89   -37.30   -47.19   -54.82   -61.44   -66.45
   YBADJ    STCK6          -69.44   -70.32   -69.06   -65.71   -60.36   -54.33

   URBANSRC ALL
   SRCGROUP ALL
SO FINISHED
**
**************************************
** AERMOD Receptor Pathway
**************************************
**
**
RE STARTING
   INCLUDED "19370 Relands Avenue West 2YR.rou"
RE FINISHED
**
**************************************
** AERMOD Meteorology Pathway
**************************************
**
**
ME STARTING
   SURFFILE "E:\New MET data\PERI_V9_ADJU\PERI_v9.SFC"
```

```
   PROFFILE "E:\New MET data\PERI_V9_ADJU\PERI_v9.PFL"
   SURFDATA 3171 2010
   UAIRDATA 3190 2010
   SITEDATA 99999 2010
   PROFBASE 442.0 METERS
ME FINISHED
**
**************************************
** AERMOD Output Pathway
**************************************
**
**
OU STARTING
** Auto-Generated Plotfiles
   PLOTFILE PERIOD ALL "19370 RELANDS AVENUE WEST 2YR.AD\PE00GALL.PLT" 31
   SUMMFILE "19370 Relands Avenue West 2YR.sum"
OU FINISHED


  *** Message Summary For AERMOD Model Setup ***

  --------- Summary of Total Messages --------

 A Total of            0 Fatal Error Message(s)
 A Total of            8 Warning Message(s)
 A Total of            0 Informational Message(s)


    ******** FATAL ERROR MESSAGES ********
              ***  NONE  ***


    ********   WARNING MESSAGES   ********
 SO W320     290        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
 SO W320     291        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
 SO W320     292        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
 SO W320     293        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
 SO W320     294        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
 SO W320     295        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
 ME W186     719       MEOPEN: THRESH_1MIN 1-min ASOS wind speed threshold used          0.50
 ME W187     719       MEOPEN: ADJ_U* Option for Stable Low Winds used in AERMET

 ***********************************
 *** SETUP Finishes Successfully ***
 ***********************************


 *** AERMOD - VERSION 22112  ***   *** 19370 Redlands Avenue West  - new site plan                      ***        04/04/23
 *** AERMET - VERSION  16216 ***   *** DPM Conc 2024-25 2YR                                            ***        18:43:28
                                                                                                                 PAGE   1
 *** MODELOPTs:    RegDFAULT  CONC  ELEV  URBAN  ADJ_U*
```

```
                                        ***     MODEL SETUP OPTIONS SUMMARY       ***
- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - -

** Model Options Selected:
     * Model Uses Regulatory DEFAULT Options
     * Model Is Setup For Calculation of Average CONCentration Values.
     * NO GAS DEPOSITION Data Provided.
     * NO PARTICLE DEPOSITION Data Provided.
     * Model Uses NO DRY DEPLETION. DDPLETE  =  F
     * Model Uses NO WET DEPLETION. WETDPLT  =  F
     * Stack-tip Downwash.
     * Model Accounts for ELEVated Terrain Effects.
     * Use Calms Processing Routine.
     * Use Missing Data Processing Routine.
     * No Exponential Decay.
     * Model Uses URBAN Dispersion Algorithm for the SBL for   179 Source(s),
       for Total of    1 Urban Area(s):
  Urban Population =   2189641.0 ;  Urban Roughness Length =  1.000 m
     * Urban Roughness Length of 1.0 Meter Used.
     * ADJ_U*   - Use ADJ_U* option for SBL in AERMET
     * CCVR_Sub - Meteorological data includes CCVR substitutions
     * TEMP_Sub - Meteorological data includes TEMP substitutions
     * Model Assumes No FLAGPOLE Receptor Heights.
     * The User Specified a Pollutant Type of: DPM

**Model Calculates PERIOD Averages Only

**This Run Includes:    179 Source(s);       1 Source Group(s); and     449 Receptor(s)

               with:      6 POINT(s), including
                          0 POINTCAP(s) and      0 POINTHOR(s)
                and:    172 VOLUME source(s)
                and:      1 AREA type source(s)
                and:      0 LINE source(s)
                and:      0 RLINE/RLINEXT source(s)
                and:      0 OPENPIT source(s)
                and:      0 BUOYANT LINE source(s) with a total of     0 line(s)
                and:      0 SWPOINT source(s)


**Model Set To Continue RUNning After the Setup Testing.

**The AERMET Input Meteorological Data Version Date:  16216

**Output Options Selected:
         Model Outputs Tables of PERIOD Averages by Receptor
         Model Outputs External File(s) of High Values for Plotting (PLOTFILE Keyword)
         Model Outputs Separate Summary File of High Ranked Values (SUMMFILE Keyword)

**NOTE:  The Following Flags May Appear Following CONC Values:  c for Calm Hours
```

m for Missing Hours
b for Both Calm and Missing Hours

**Misc. Inputs: Base Elev. for Pot. Temp. Profile (m MSL) = 442.00 ; Decay Coef. = 0.000 ; Rot. Angle = 0.0
Emission Units = GRAMS/SEC ; Emission Rate Unit Factor = 0.10000E+07
Output Units = MICROGRAMS/M**3

**Approximate Storage Requirements of Model = 3.9 MB of RAM.

**Input Runstream File: aermod.inp
**Output Print File: aermod.out

**Detailed Error/Message File: 19370 Relands Avenue West 2YR.err
**File for Summary of Results: 19370 Relands Avenue West 2YR.sum

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** POINT SOURCE DATA ***

SOURCE ID	NUMBER PART. CATS.	EMISSION RATE (GRAMS/SEC)	X (METERS)	Y (METERS)	BASE ELEV. (METERS)	STACK HEIGHT (METERS)	STACK TEMP. (DEG.K)	STACK EXIT VEL. (M/SEC)	STACK DIAMETER (METERS)	BLDG EXISTS	URBAN SOURCE	CAP/ HOR	EMIS RATE SCALAR VARY BY
STCK1	0	0.12000E-04	479650.5	3743097.5	441.2	3.50	366.00	51.82	0.10	YES	YES	NO	
STCK2	0	0.12000E-04	479648.8	3742857.1	441.1	3.50	366.00	51.82	0.10	YES	YES	NO	
STCK3	0	0.12000E-04	479532.5	3743073.0	441.9	3.50	366.00	51.82	0.10	YES	YES	NO	
STCK4	0	0.12000E-04	479531.4	3743021.0	441.8	3.50	366.00	51.82	0.10	YES	YES	NO	
STCK5	0	0.12000E-04	479529.5	3742977.7	441.7	3.50	366.00	51.82	0.10	YES	YES	NO	
STCK6	0	0.12000E-04	479530.2	3742931.1	441.7	3.50	366.00	51.82	0.10	YES	YES	NO	

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** VOLUME SOURCE DATA ***

SOURCE ID	NUMBER PART. CATS.	EMISSION RATE (GRAMS/SEC)	X (METERS)	Y (METERS)	BASE ELEV. (METERS)	RELEASE HEIGHT (METERS)	INIT. SY (METERS)	INIT. SZ (METERS)	URBAN SOURCE	EMISSION RATE SCALAR VARY BY
L0000239	0	0.23640E-06	479655.4	3742857.0	441.1	3.50	4.00	5.10	YES	
L0000240	0	0.23640E-06	479646.8	3742856.1	441.1	3.50	4.00	5.10	YES	
L0000241	0	0.23640E-06	479638.3	3742855.3	441.1	3.50	4.00	5.10	YES	

```
L0000242        0   0.23640E-06  479629.7 3742854.8   441.1     3.50     4.00     5.10     YES
L0000243        0   0.23640E-06  479621.1 3742854.9   441.1     3.50     4.00     5.10     YES
L0000244        0   0.23640E-06  479612.5 3742855.0   441.1     3.50     4.00     5.10     YES
L0000245        0   0.23640E-06  479603.9 3742855.1   441.2     3.50     4.00     5.10     YES
L0000246        0   0.23640E-06  479595.4 3742855.2   441.3     3.50     4.00     5.10     YES
L0000247        0   0.23640E-06  479586.8 3742855.3   441.4     3.50     4.00     5.10     YES
L0000248        0   0.23640E-06  479578.2 3742855.4   441.6     3.50     4.00     5.10     YES
L0000249        0   0.23640E-06  479569.6 3742855.5   441.7     3.50     4.00     5.10     YES
L0000250        0   0.23640E-06  479561.0 3742855.6   441.7     3.50     4.00     5.10     YES
L0000251        0   0.23640E-06  479552.4 3742855.7   441.8     3.50     4.00     5.10     YES
L0000252        0   0.23640E-06  479543.8 3742855.8   441.8     3.50     4.00     5.10     YES
L0000253        0   0.23640E-06  479535.2 3742855.9   441.8     3.50     4.00     5.10     YES
L0000254        0   0.23640E-06  479526.7 3742856.6   441.8     3.50     4.00     5.10     YES
L0000255        0   0.23640E-06  479519.7 3742859.9   441.8     3.50     4.00     5.10     YES
L0000256        0   0.23640E-06  479516.1 3742867.7   441.8     3.50     4.00     5.10     YES
L0000257        0   0.23640E-06  479512.5 3742875.5   441.9     3.50     4.00     5.10     YES
L0000258        0   0.23640E-06  479508.9 3742883.3   441.9     3.50     4.00     5.10     YES
L0000259        0   0.23640E-06  479505.4 3742891.1   441.8     3.50     4.00     5.10     YES
L0000260        0   0.23640E-06  479501.8 3742898.9   441.8     3.50     4.00     5.10     YES
L0000261        0   0.23640E-06  479498.2 3742906.7   441.8     3.50     4.00     5.10     YES
L0000262        0   0.23640E-06  479494.6 3742914.5   441.8     3.50     4.00     5.10     YES
L0000263        0   0.23640E-06  479491.0 3742922.3   441.8     3.50     4.00     5.10     YES
L0000264        0   0.23640E-06  479487.4 3742930.1   441.9     3.50     4.00     5.10     YES
L0000265        0   0.23640E-06  479483.8 3742937.9   441.9     3.50     4.00     5.10     YES
L0000266        0   0.23640E-06  479480.2 3742945.7   442.0     3.50     4.00     5.10     YES
L0000267        0   0.23640E-06  479476.6 3742953.5   442.0     3.50     4.00     5.10     YES
L0000268        0   0.23640E-06  479473.0 3742961.3   442.0     3.50     4.00     5.10     YES
L0000269        0   0.23640E-06  479470.0 3742969.4   441.9     3.50     4.00     5.10     YES
L0000270        0   0.23640E-06  479467.0 3742977.4   441.9     3.50     4.00     5.10     YES
L0000271        0   0.23640E-06  479464.1 3742985.5   442.0     3.50     4.00     5.10     YES
L0000272        0   0.23640E-06  479461.1 3742993.5   442.0     3.50     4.00     5.10     YES
L0000273        0   0.23640E-06  479458.9 3743001.7   442.0     3.50     4.00     5.10     YES
L0000274        0   0.23640E-06  479459.4 3743010.3   442.1     3.50     4.00     5.10     YES
L0000275        0   0.23640E-06  479459.9 3743018.9   442.1     3.50     4.00     5.10     YES
L0000276        0   0.23640E-06  479460.4 3743027.5   442.2     3.50     4.00     5.10     YES
L0000277        0   0.23640E-06  479460.9 3743036.0   442.2     3.50     4.00     5.10     YES
L0000278        0   0.23640E-06  479462.4 3743044.4   442.1     3.50     4.00     5.10     YES
```



```
*** MODELOPTs:    RegDFAULT  CONC  ELEV  URBAN  ADJ_U*
```

*** VOLUME SOURCE DATA ***

SOURCE ID	NUMBER PART. CATS.	EMISSION RATE (GRAMS/SEC)	X (METERS)	Y (METERS)	BASE ELEV. (METERS)	RELEASE HEIGHT (METERS)	INIT. SY (METERS)	INIT. SZ (METERS)	URBAN SOURCE	EMISSION RATE SCALAR VARY BY

L0000279	0	0.23640E-06	479464.7	3743052.7	442.1	3.50	4.00	5.10	YES
L0000280	0	0.23640E-06	479467.0	3743061.0	442.0	3.50	4.00	5.10	YES
L0000281	0	0.23640E-06	479469.4	3743069.3	441.9	3.50	4.00	5.10	YES
L0000282	0	0.23640E-06	479474.3	3743075.5	441.9	3.50	4.00	5.10	YES
L0000283	0	0.23640E-06	479481.7	3743079.7	441.9	3.50	4.00	5.10	YES
L0000284	0	0.23640E-06	479489.2	3743084.0	441.9	3.50	4.00	5.10	YES
L0000285	0	0.23640E-06	479496.7	3743088.2	441.8	3.50	4.00	5.10	YES
L0000286	0	0.23640E-06	479504.2	3743092.4	441.7	3.50	4.00	5.10	YES
L0000287	0	0.23640E-06	479512.1	3743095.3	441.7	3.50	4.00	5.10	YES
L0000288	0	0.23640E-06	479520.6	3743096.6	441.6	3.50	4.00	5.10	YES
L0000289	0	0.23640E-06	479529.1	3743097.9	441.6	3.50	4.00	5.10	YES
L0000290	0	0.23640E-06	479537.6	3743099.3	441.5	3.50	4.00	5.10	YES
L0000291	0	0.23640E-06	479546.1	3743100.6	441.4	3.50	4.00	5.10	YES
L0000292	0	0.23640E-06	479554.6	3743100.9	441.4	3.50	4.00	5.10	YES
L0000293	0	0.23640E-06	479563.2	3743100.8	441.4	3.50	4.00	5.10	YES
L0000294	0	0.23640E-06	479571.8	3743100.7	441.3	3.50	4.00	5.10	YES
L0000295	0	0.23640E-06	479580.4	3743100.6	441.3	3.50	4.00	5.10	YES
L0000296	0	0.23640E-06	479589.0	3743100.5	441.3	3.50	4.00	5.10	YES
L0000297	0	0.23640E-06	479597.6	3743100.4	441.2	3.50	4.00	5.10	YES
L0000298	0	0.23640E-06	479606.2	3743100.3	441.2	3.50	4.00	5.10	YES
L0000299	0	0.23640E-06	479614.8	3743100.1	441.2	3.50	4.00	5.10	YES
L0000300	0	0.23640E-06	479623.3	3743100.0	441.2	3.50	4.00	5.10	YES
L0000301	0	0.23640E-06	479631.9	3743099.9	441.2	3.50	4.00	5.10	YES
L0000302	0	0.23640E-06	479640.5	3743099.8	441.2	3.50	4.00	5.10	YES
L0000303	0	0.23640E-06	479649.1	3743099.7	441.2	3.50	4.00	5.10	YES
L0000304	0	0.23640E-06	479657.7	3743099.6	441.2	3.50	4.00	5.10	YES
L0000305	0	0.52140E-07	479669.0	3742861.9	441.1	3.50	4.00	1.63	YES
L0000306	0	0.52140E-07	479669.8	3742870.4	441.1	3.50	4.00	1.63	YES
L0000307	0	0.52140E-07	479670.3	3742879.0	441.1	3.50	4.00	1.63	YES
L0000308	0	0.52140E-07	479670.3	3742887.6	441.1	3.50	4.00	1.63	YES
L0000309	0	0.52140E-07	479670.3	3742896.2	441.1	3.50	4.00	1.63	YES
L0000310	0	0.52140E-07	479670.3	3742904.8	441.1	3.50	4.00	1.63	YES
L0000311	0	0.52140E-07	479670.3	3742913.4	441.1	3.50	4.00	1.63	YES
L0000312	0	0.52140E-07	479670.3	3742921.9	441.1	3.50	4.00	1.63	YES
L0000313	0	0.52140E-07	479670.3	3742930.5	441.1	3.50	4.00	1.63	YES
L0000314	0	0.52140E-07	479670.3	3742939.1	441.0	3.50	4.00	1.63	YES
L0000315	0	0.52140E-07	479670.3	3742947.7	441.0	3.50	4.00	1.63	YES
L0000316	0	0.52140E-07	479670.3	3742956.3	441.0	3.50	4.00	1.63	YES
L0000317	0	0.52140E-07	479670.3	3742964.9	441.0	3.50	4.00	1.63	YES
L0000318	0	0.52140E-07	479670.3	3742973.5	441.0	3.50	4.00	1.63	YES

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** VOLUME SOURCE DATA ***

SOURCE	NUMBER PART.	EMISSION RATE (GRAMS/SEC)	X	Y	BASE ELEV.	RELEASE HEIGHT	INIT. SY	INIT. SZ	URBAN SOURCE	EMISSION RATE SCALAR VARY

ID	CATS.		(METERS)	(METERS)	(METERS)	(METERS)	(METERS)	(METERS)	BY
L0000319	0	0.52140E-07	479670.3	3742982.1	441.1	3.50	4.00	1.63	YES
L0000320	0	0.52140E-07	479670.3	3742990.7	441.1	3.50	4.00	1.63	YES
L0000321	0	0.52140E-07	479670.3	3742999.3	441.1	3.50	4.00	1.63	YES
L0000322	0	0.52140E-07	479670.3	3743007.9	441.2	3.50	4.00	1.63	YES
L0000323	0	0.52140E-07	479670.3	3743016.4	441.2	3.50	4.00	1.63	YES
L0000324	0	0.52140E-07	479670.3	3743025.0	441.2	3.50	4.00	1.63	YES
L0000325	0	0.52140E-07	479670.3	3743033.6	441.3	3.50	4.00	1.63	YES
L0000326	0	0.52140E-07	479670.3	3743042.2	441.3	3.50	4.00	1.63	YES
L0000327	0	0.52140E-07	479670.3	3743050.8	441.3	3.50	4.00	1.63	YES
L0000328	0	0.52140E-07	479670.3	3743059.4	441.4	3.50	4.00	1.63	YES
L0000329	0	0.52140E-07	479670.3	3743068.0	441.4	3.50	4.00	1.63	YES
L0000330	0	0.52140E-07	479670.3	3743076.6	441.3	3.50	4.00	1.63	YES
L0000331	0	0.52140E-07	479670.3	3743085.2	441.3	3.50	4.00	1.63	YES
L0000332	0	0.52140E-07	479670.3	3743093.8	441.2	3.50	4.00	1.63	YES
L0000333	0	0.10440E-06	479670.0	3743107.7	440.9	3.50	4.00	1.63	YES
L0000334	0	0.10440E-06	479669.8	3743116.3	440.6	3.50	4.00	1.63	YES
L0000335	0	0.10440E-06	479669.6	3743124.9	440.3	3.50	4.00	1.63	YES
L0000336	0	0.10440E-06	479669.4	3743133.5	440.3	3.50	4.00	1.63	YES
L0000337	0	0.10440E-06	479669.2	3743142.1	440.5	3.50	4.00	1.63	YES
L0000338	0	0.10440E-06	479669.0	3743150.7	440.8	3.50	4.00	1.63	YES
L0000339	0	0.10440E-06	479668.8	3743159.3	441.0	3.50	4.00	1.63	YES
L0000340	0	0.10440E-06	479668.6	3743167.8	441.0	3.50	4.00	1.63	YES
L0000341	0	0.10440E-06	479668.3	3743176.4	441.0	3.50	4.00	1.63	YES
L0000342	0	0.10440E-06	479668.1	3743185.0	441.0	3.50	4.00	1.63	YES
L0000343	0	0.10440E-06	479667.9	3743193.6	441.1	3.50	4.00	1.63	YES
L0000344	0	0.10440E-06	479667.7	3743202.2	441.2	3.50	4.00	1.63	YES
L0000345	0	0.10440E-06	479667.5	3743210.8	441.2	3.50	4.00	1.63	YES
L0000346	0	0.10440E-06	479667.3	3743219.4	441.3	3.50	4.00	1.63	YES
L0000347	0	0.10440E-06	479667.1	3743228.0	441.3	3.50	4.00	1.63	YES
L0000348	0	0.10440E-06	479666.9	3743236.5	441.3	3.50	4.00	1.63	YES
L0000349	0	0.10440E-06	479666.7	3743245.1	441.3	3.50	4.00	1.63	YES
L0000350	0	0.10440E-06	479666.5	3743253.7	441.3	3.50	4.00	1.63	YES
L0000351	0	0.10440E-06	479666.4	3743262.3	441.2	3.50	4.00	1.63	YES
L0000352	0	0.10440E-06	479666.3	3743270.9	441.2	3.50	4.00	1.63	YES
L0000353	0	0.10440E-06	479666.2	3743279.5	441.1	3.50	4.00	1.63	YES
L0000354	0	0.10440E-06	479666.1	3743288.1	441.0	3.50	4.00	1.63	YES
L0000355	0	0.10440E-06	479666.0	3743296.7	440.8	3.50	4.00	1.63	YES
L0000356	0	0.10440E-06	479665.9	3743305.3	440.7	3.50	4.00	1.63	YES
L0000357	0	0.10440E-06	479665.8	3743313.9	440.6	3.50	4.00	1.63	YES
L0000358	0	0.10440E-06	479665.7	3743322.4	440.6	3.50	4.00	1.63	YES

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** VOLUME SOURCE DATA ***

SOURCE ID	NUMBER PART. CATS.	EMISSION RATE (GRAMS/SEC)	X (METERS)	Y (METERS)	BASE ELEV. (METERS)	RELEASE HEIGHT (METERS)	INIT. SY (METERS)	INIT. SZ (METERS)	URBAN SOURCE	EMISSION RATE SCALAR VARY BY
L0000359	0	0.10440E-06	479665.6	3743331.0	440.7	3.50	4.00	1.63	YES	
L0000360	0	0.10440E-06	479666.0	3743339.6	440.7	3.50	4.00	1.63	YES	
L0000361	0	0.10440E-06	479666.3	3743348.2	440.7	3.50	4.00	1.63	YES	
L0000362	0	0.10440E-06	479666.6	3743356.8	440.7	3.50	4.00	1.63	YES	
L0000363	0	0.10440E-06	479666.9	3743365.4	440.6	3.50	4.00	1.63	YES	
L0000364	0	0.10440E-06	479667.2	3743374.0	440.6	3.50	4.00	1.63	YES	
L0000365	0	0.10440E-06	479667.5	3743382.5	440.4	3.50	4.00	1.63	YES	
L0000366	0	0.10440E-06	479668.7	3743391.0	440.2	3.50	4.00	1.63	YES	
L0000367	0	0.10440E-06	479670.3	3743399.5	440.0	3.50	4.00	1.63	YES	
L0000368	0	0.10440E-06	479671.8	3743407.9	439.8	3.50	4.00	1.63	YES	
L0000369	0	0.10440E-06	479673.3	3743416.4	439.7	3.50	4.00	1.63	YES	
L0000370	0	0.10440E-06	479675.4	3743424.7	439.6	3.50	4.00	1.63	YES	
L0000371	0	0.10440E-06	479677.6	3743433.0	439.5	3.50	4.00	1.63	YES	
L0000372	0	0.10440E-06	479679.8	3743441.3	439.6	3.50	4.00	1.63	YES	
L0000373	0	0.10440E-06	479682.0	3743449.6	439.8	3.50	4.00	1.63	YES	
L0000374	0	0.10440E-06	479684.2	3743457.9	440.1	3.50	4.00	1.63	YES	
L0000375	0	0.10440E-06	479686.4	3743466.2	440.3	3.50	4.00	1.63	YES	
L0000376	0	0.10440E-06	479688.0	3743474.7	440.4	3.50	4.00	1.63	YES	
L0000377	0	0.10440E-06	479689.5	3743483.1	440.4	3.50	4.00	1.63	YES	
L0000378	0	0.10440E-06	479691.0	3743491.6	440.5	3.50	4.00	1.63	YES	
L0000379	0	0.10440E-06	479692.4	3743500.1	440.5	3.50	4.00	1.63	YES	
L0000380	0	0.10440E-06	479693.8	3743508.5	440.5	3.50	4.00	1.63	YES	
L0000381	0	0.10440E-06	479694.8	3743517.1	440.5	3.50	4.00	1.63	YES	
L0000382	0	0.10440E-06	479695.8	3743525.6	440.4	3.50	4.00	1.63	YES	
L0000383	0	0.10440E-06	479696.7	3743534.2	440.4	3.50	4.00	1.63	YES	
L0000384	0	0.10440E-06	479697.7	3743542.7	440.3	3.50	4.00	1.63	YES	
L0000385	0	0.10440E-06	479698.7	3743551.2	440.2	3.50	4.00	1.63	YES	
L0000386	0	0.10440E-06	479699.0	3743559.8	440.2	3.50	4.00	1.63	YES	
L0000387	0	0.10440E-06	479699.3	3743568.4	440.1	3.50	4.00	1.63	YES	
L0000388	0	0.10440E-06	479699.6	3743577.0	440.1	3.50	4.00	1.63	YES	
L0000389	0	0.10440E-06	479699.9	3743585.6	440.1	3.50	4.00	1.63	YES	
L0000390	0	0.10440E-06	479700.2	3743594.2	440.0	3.50	4.00	1.63	YES	
L0000391	0	0.10440E-06	479700.5	3743602.7	439.8	3.50	4.00	1.63	YES	
L0000392	0	0.10440E-06	479700.7	3743611.3	439.7	3.50	4.00	1.63	YES	
L0000393	0	0.10440E-06	479700.6	3743619.9	439.5	3.50	4.00	1.63	YES	
L0000394	0	0.10440E-06	479700.6	3743628.5	439.4	3.50	4.00	1.63	YES	
L0000395	0	0.10440E-06	479700.5	3743637.1	439.4	3.50	4.00	1.63	YES	
L0000396	0	0.10440E-06	479700.5	3743645.7	439.4	3.50	4.00	1.63	YES	
L0000397	0	0.10440E-06	479700.4	3743654.3	439.5	3.50	4.00	1.63	YES	
L0000398	0	0.10440E-06	479700.4	3743662.9	439.9	3.50	4.00	1.63	YES	

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** VOLUME SOURCE DATA ***

SOURCE ID	NUMBER PART. CATS.	EMISSION RATE (GRAMS/SEC)	X (METERS)	Y (METERS)	BASE ELEV. (METERS)	RELEASE HEIGHT (METERS)	INIT. SY (METERS)	INIT. SZ (METERS)	URBAN SOURCE	EMISSION RATE SCALAR VARY BY
L0000399	0	0.10440E-06	479700.3	3743671.5	440.2	3.50	4.00	1.63	YES	
L0000400	0	0.10440E-06	479700.3	3743680.0	440.6	3.50	4.00	1.63	YES	
L0000401	0	0.10440E-06	479700.2	3743688.6	440.7	3.50	4.00	1.63	YES	
L0000402	0	0.10440E-06	479700.1	3743697.2	440.7	3.50	4.00	1.63	YES	
L0000403	0	0.10440E-06	479700.1	3743705.8	440.7	3.50	4.00	1.63	YES	
L0000404	0	0.10440E-06	479700.0	3743714.4	440.7	3.50	4.00	1.63	YES	
L0000405	0	0.10440E-06	479700.0	3743723.0	440.6	3.50	4.00	1.63	YES	
L0000406	0	0.10440E-06	479699.9	3743731.6	440.4	3.50	4.00	1.63	YES	
L0000407	0	0.10440E-06	479699.9	3743740.2	440.3	3.50	4.00	1.63	YES	
L0000408	0	0.10440E-06	479699.8	3743748.8	440.3	3.50	4.00	1.63	YES	
L0000409	0	0.10440E-06	479699.8	3743757.4	440.4	3.50	4.00	1.63	YES	
L0000410	0	0.10440E-06	479699.7	3743766.0	440.6	3.50	4.00	1.63	YES	

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** AREAPOLY SOURCE DATA ***

SOURCE ID	NUMBER PART. CATS.	EMISSION RATE (GRAMS/SEC /METER**2)	LOCATION OF AREA X (METERS)	Y (METERS)	BASE ELEV. (METERS)	RELEASE HEIGHT (METERS)	NUMBER OF VERTS.	INIT. SZ (METERS)	URBAN SOURCE	EMISSION RATE SCALAR VARY BY
PAREA1	0	0.11741E-08	479547.3	3743092.8	441.6	0.91	14	0.00	YES	

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** SOURCE IDs DEFINING SOURCE GROUPS ***

SRCGROUP ID	SOURCE IDs
ALL	STCK1 , STCK2 , STCK3 , STCK4 , STCK5 , STCK6 , L0000239 , L0000240 ,

```
            L0000241    , L0000242    , L0000243    , L0000244    , L0000245    , L0000246    , L0000247    , L0000248    ,
            L0000249    , L0000250    , L0000251    , L0000252    , L0000253    , L0000254    , L0000255    , L0000256    ,
            L0000257    , L0000258    , L0000259    , L0000260    , L0000261    , L0000262    , L0000263    , L0000264    ,
            L0000265    , L0000266    , L0000267    , L0000268    , L0000269    , L0000270    , L0000271    , L0000272    ,
            L0000273    , L0000274    , L0000275    , L0000276    , L0000277    , L0000278    , L0000279    , L0000280    ,
            L0000281    , L0000282    , L0000283    , L0000284    , L0000285    , L0000286    , L0000287    , L0000288    ,
            L0000289    , L0000290    , L0000291    , L0000292    , L0000293    , L0000294    , L0000295    , L0000296    ,
            L0000297    , L0000298    , L0000299    , L0000300    , L0000301    , L0000302    , L0000303    , L0000304    ,
            L0000305    , L0000306    , L0000307    , L0000308    , L0000309    , L0000310    , L0000311    , L0000312    ,
            L0000313    , L0000314    , L0000315    , L0000316    , L0000317    , L0000318    , L0000319    , L0000320    ,
            L0000321    , L0000322    , L0000323    , L0000324    , L0000325    , L0000326    , L0000327    , L0000328    ,
            L0000329    , L0000330    , L0000331    , L0000332    , L0000333    , L0000334    , L0000335    , L0000336    ,
            L0000337    , L0000338    , L0000339    , L0000340    , L0000341    , L0000342    , L0000343    , L0000344    ,
            L0000345    , L0000346    , L0000347    , L0000348    , L0000349    , L0000350    , L0000351    , L0000352    ,
            L0000353    , L0000354    , L0000355    , L0000356    , L0000357    , L0000358    , L0000359    , L0000360    ,
            L0000361    , L0000362    , L0000363    , L0000364    , L0000365    , L0000366    , L0000367    , L0000368    ,
            L0000369    , L0000370    , L0000371    , L0000372    , L0000373    , L0000374    , L0000375    , L0000376    ,
            L0000377    , L0000378    , L0000379    , L0000380    , L0000381    , L0000382    , L0000383    , L0000384    ,
            L0000385    , L0000386    , L0000387    , L0000388    , L0000389    , L0000390    , L0000391    , L0000392    ,
```


*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** SOURCE IDs DEFINING SOURCE GROUPS ***

SRCGROUP ID	SOURCE IDs

```
            L0000393    , L0000394    , L0000395    , L0000396    , L0000397    , L0000398    , L0000399    , L0000400    ,
```

*** SOURCE IDs DEFINED AS URBAN SOURCES ***

URBAN ID	URBAN POP	SOURCE IDs

2189641. STCK1 , STCK2 , STCK3 , STCK4 , STCK5 , STCK6 , L0000239 , L0000240 ,

L0000241 , L0000242 , L0000243 , L0000244 , L0000245 , L0000246 , L0000247 , L0000248 ,

L0000249 , L0000250 , L0000251 , L0000252 , L0000253 , L0000254 , L0000255 , L0000256 ,

L0000257 , L0000258 , L0000259 , L0000260 , L0000261 , L0000262 , L0000263 , L0000264 ,

L0000265 , L0000266 , L0000267 , L0000268 , L0000269 , L0000270 , L0000271 , L0000272 ,

L0000273 , L0000274 , L0000275 , L0000276 , L0000277 , L0000278 , L0000279 , L0000280 ,

L0000281 , L0000282 , L0000283 , L0000284 , L0000285 , L0000286 , L0000287 , L0000288 ,

L0000289 , L0000290 , L0000291 , L0000292 , L0000293 , L0000294 , L0000295 , L0000296 ,

L0000297 , L0000298 , L0000299 , L0000300 , L0000301 , L0000302 , L0000303 , L0000304 ,

L0000305 , L0000306 , L0000307 , L0000308 , L0000309 , L0000310 , L0000311 , L0000312 ,

L0000313 , L0000314 , L0000315 , L0000316 , L0000317 , L0000318 , L0000319 , L0000320 ,

L0000321 , L0000322 , L0000323 , L0000324 , L0000325 , L0000326 , L0000327 , L0000328 ,

L0000329 , L0000330 , L0000331 , L0000332 , L0000333 , L0000334 , L0000335 , L0000336 ,

L0000337 , L0000338 , L0000339 , L0000340 , L0000341 , L0000342 , L0000343 , L0000344 ,

L0000345 , L0000346 , L0000347 , L0000348 , L0000349 , L0000350 , L0000351 , L0000352 ,

L0000353 , L0000354 , L0000355 , L0000356 , L0000357 , L0000358 , L0000359 , L0000360 ,

L0000361 , L0000362 , L0000363 , L0000364 , L0000365 , L0000366 , L0000367 , L0000368 ,

L0000369 , L0000370 , L0000371 , L0000372 , L0000373 , L0000374 , L0000375 , L0000376 ,

L0000377 , L0000378 , L0000379 , L0000380 , L0000381 , L0000382 , L0000383 , L0000384 ,

L0000385 , L0000386 , L0000387 , L0000388 , L0000389 , L0000390 , L0000391 , L0000392 ,

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** SOURCE IDs DEFINED AS URBAN SOURCES ***

URBAN ID	URBAN POP	SOURCE IDs

L0000393 , L0000394 , L0000395 , L0000396 , L0000397 , L0000398 , L0000399 , L0000400 ,

L0000401 , L0000402 , L0000403 , L0000404 , L0000405 , L0000406 , L0000407 , L0000408 ,

L0000409 , L0000410 , PAREA1 ,

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** DIRECTION SPECIFIC BUILDING DIMENSIONS ***

SOURCE ID: STCK1

IFV	BH	BW	BL	XADJ	YADJ	IFV	BH	BW	BL	XADJ	YADJ
1	11.0,	126.8,	240.7,	-250.3,	38.2,	2	11.0,	161.1,	247.7,	-260.0,	15.7,
3	11.0,	190.4,	247.7,	-261.7,	-7.3,	4	11.0,	214.0,	240.2,	-255.5,	-30.1,
5	11.0,	231.0,	225.4,	-241.6,	-52.0,	6	11.0,	241.1,	203.8,	-220.2,	-72.3,
7	11.0,	243.8,	175.9,	-192.2,	-90.4,	8	11.0,	239.1,	142.7,	-158.4,	-105.8,
9	11.0,	229.9,	107.5,	-119.7,	-119.3,	10	0.0,	0.0,	0.0,	0.0,	0.0,
11	0.0,	0.0,	0.0,	0.0,	0.0,	12	0.0,	0.0,	0.0,	0.0,	0.0,
13	0.0,	0.0,	0.0,	0.0,	0.0,	14	0.0,	0.0,	0.0,	0.0,	0.0,
15	0.0,	0.0,	0.0,	0.0,	0.0,	16	0.0,	0.0,	0.0,	0.0,	0.0,
17	0.0,	0.0,	0.0,	0.0,	0.0,	18	0.0,	0.0,	0.0,	0.0,	0.0,
19	11.0,	126.8,	240.7,	9.7,	-38.2,	20	11.0,	161.1,	247.7,	12.3,	-15.7,
21	11.0,	190.4,	247.7,	14.0,	7.3,	22	11.0,	214.0,	240.2,	15.3,	30.1,
23	11.0,	231.0,	225.4,	16.1,	52.0,	24	11.0,	241.1,	203.8,	16.5,	72.3,
25	11.0,	243.8,	175.9,	16.3,	90.4,	26	11.0,	239.1,	142.7,	15.7,	105.8,
27	11.0,	229.9,	107.5,	12.2,	119.3,	28	0.0,	0.0,	0.0,	0.0,	0.0,
29	0.0,	0.0,	0.0,	0.0,	0.0,	30	0.0,	0.0,	0.0,	0.0,	0.0,
31	0.0,	0.0,	0.0,	0.0,	0.0,	32	0.0,	0.0,	0.0,	0.0,	0.0,

33	0.0,	0.0,	0.0,	0.0,	0.0,	34	0.0,	0.0,	0.0,	0.0,	0.0,
35	0.0,	0.0,	0.0,	0.0,	0.0,	36	0.0,	0.0,	0.0,	0.0,	0.0,

SOURCE ID: STCK2

IFV	BH	BW	BL	XADJ	YADJ	IFV	BH	BW	BL	XADJ	YADJ
1	0.0,	0.0,	0.0,	0.0,	0.0,	2	0.0,	0.0,	0.0,	0.0,	0.0,
3	0.0,	0.0,	0.0,	0.0,	0.0,	4	0.0,	0.0,	0.0,	0.0,	0.0,
5	0.0,	0.0,	0.0,	0.0,	0.0,	6	0.0,	0.0,	0.0,	0.0,	0.0,
7	0.0,	0.0,	0.0,	0.0,	0.0,	8	0.0,	0.0,	0.0,	0.0,	0.0,
9	0.0,	0.0,	0.0,	0.0,	0.0,	10	11.0,	240.7,	126.8,	-141.7,	107.1,
11	11.0,	247.7,	161.1,	-176.8,	90.4,	12	11.0,	247.7,	190.4,	-206.6,	71.2,
13	11.0,	240.2,	214.0,	-230.1,	49.9,	14	11.0,	225.4,	231.0,	-246.6,	27.1,
15	11.0,	203.8,	241.1,	-255.6,	3.4,	16	11.0,	175.9,	243.8,	-256.9,	-20.4,
17	11.0,	142.7,	239.1,	-250.3,	-43.5,	18	0.0,	0.0,	0.0,	0.0,	0.0,
19	0.0,	0.0,	0.0,	0.0,	0.0,	20	0.0,	0.0,	0.0,	0.0,	0.0,
21	0.0,	0.0,	0.0,	0.0,	0.0,	22	0.0,	0.0,	0.0,	0.0,	0.0,
23	0.0,	0.0,	0.0,	0.0,	0.0,	24	0.0,	0.0,	0.0,	0.0,	0.0,
25	0.0,	0.0,	0.0,	0.0,	0.0,	26	0.0,	0.0,	0.0,	0.0,	0.0,
27	0.0,	0.0,	0.0,	0.0,	0.0,	28	11.0,	240.7,	126.8,	14.8,	-107.1,
29	11.0,	247.7,	161.1,	15.7,	-90.4,	30	11.0,	247.7,	190.4,	16.2,	-71.2,
31	11.0,	240.2,	214.0,	16.1,	-49.9,	32	11.0,	225.4,	231.0,	15.6,	-27.1,
33	11.0,	203.8,	241.1,	14.5,	-3.4,	34	11.0,	175.9,	243.8,	13.1,	20.4,
35	11.0,	142.7,	239.1,	11.2,	43.5,	36	0.0,	0.0,	0.0,	0.0,	0.0,

SOURCE ID: STCK3

IFV	BH	BW	BL	XADJ	YADJ	IFV	BH	BW	BL	XADJ	YADJ
1	0.0,	0.0,	0.0,	0.0,	0.0,	2	0.0,	0.0,	0.0,	0.0,	0.0,
3	11.0,	190.4,	247.7,	-181.5,	-97.2,	4	11.0,	214.0,	240.2,	-160.9,	-104.7,
5	11.0,	231.0,	225.4,	-135.4,	-109.0,	6	11.0,	241.1,	203.8,	-105.8,	-110.0,
7	11.0,	243.8,	175.9,	-73.0,	-107.7,	8	11.0,	239.1,	142.7,	-37.9,	-102.1,
9	11.0,	229.9,	107.5,	-1.8,	-94.7,	10	11.0,	240.7,	126.8,	10.3,	-85.3,
11	11.0,	247.7,	161.1,	6.3,	-72.7,	12	11.0,	247.7,	190.4,	2.0,	-57.6,
13	11.0,	240.2,	214.0,	-2.2,	-40.8,	14	11.0,	225.4,	231.0,	-6.5,	-22.7,
15	11.0,	203.8,	241.1,	-10.5,	-3.9,	16	11.0,	175.9,	243.8,	-14.2,	15.0,
17	11.0,	142.7,	239.1,	-17.5,	33.4,	18	11.0,	107.5,	229.9,	-20.2,	52.0,
19	0.0,	0.0,	0.0,	0.0,	0.0,	20	0.0,	0.0,	0.0,	0.0,	0.0,
21	11.0,	190.4,	247.7,	-66.2,	97.2,	22	11.0,	214.0,	240.2,	-79.3,	104.7,
23	11.0,	231.0,	225.4,	-90.0,	109.0,	24	11.0,	241.1,	203.8,	-98.0,	110.0,
25	11.0,	243.8,	175.9,	-103.0,	107.7,	26	11.0,	239.1,	142.7,	-104.8,	102.1,
27	11.0,	229.9,	107.5,	-105.8,	94.7,	28	11.0,	240.7,	126.8,	-137.1,	85.3,
29	11.0,	247.7,	161.1,	-167.3,	72.7,	30	11.0,	247.7,	190.4,	-192.5,	57.6,
31	11.0,	240.2,	214.0,	-211.7,	40.8,	32	11.0,	225.4,	231.0,	-224.6,	22.7,
33	11.0,	203.8,	241.1,	-230.6,	3.9,	34	11.0,	175.9,	243.8,	-229.6,	-15.0,
35	11.0,	142.7,	239.1,	-221.6,	-33.4,	36	11.0,	107.5,	229.9,	-209.7,	-52.0,

SOURCE ID: STCK4

IFV	BH	BW	BL	XADJ	YADJ	IFV	BH	BW	BL	XADJ	YADJ
1	11.0,	126.8,	240.7,	-154.2,	-65.8,	2	11.0,	161.1,	247.7,	-147.3,	-70.1,

3	11.0,	190.4,	247.7,	-135.8,	-72.2,	4	11.0,	214.0,	240.2,	-120.3,	-72.2,
5	11.0,	231.0,	225.4,	-101.0,	-69.9,	6	11.0,	241.1,	203.8,	-78.8,	-65.5,
7	11.0,	243.8,	175.9,	-54.1,	-59.2,	8	11.0,	239.1,	142.7,	-27.8,	-51.0,
9	11.0,	229.9,	107.5,	-0.6,	-42.7,	10	11.0,	240.7,	126.8,	2.4,	-33.9,
11	11.0,	247.7,	161.1,	-10.4,	-23.4,	12	11.0,	247.7,	190.4,	-23.0,	-12.0,
13	11.0,	240.2,	214.0,	-34.8,	-0.2,	14	11.0,	225.4,	231.0,	-45.6,	11.7,
15	11.0,	203.8,	241.1,	-55.0,	23.1,	16	11.0,	175.9,	243.8,	-62.7,	33.9,
17	11.0,	142.7,	239.1,	-68.5,	43.6,	18	11.0,	107.5,	229.9,	-72.3,	53.2,
19	11.0,	126.8,	240.7,	-86.4,	65.8,	20	11.0,	161.1,	247.7,	-100.4,	70.1,
21	11.0,	190.4,	247.7,	-111.9,	72.2,	22	11.0,	214.0,	240.2,	-119.9,	72.2,
23	11.0,	231.0,	225.4,	-124.3,	69.9,	24	11.0,	241.1,	203.8,	-125.0,	65.5,
25	11.0,	243.8,	175.9,	-121.8,	59.2,	26	11.0,	239.1,	142.7,	-115.0,	51.0,
27	11.0,	229.9,	107.5,	-106.9,	42.7,	28	11.0,	240.7,	126.8,	-129.2,	33.9,
29	11.0,	247.7,	161.1,	-150.6,	23.4,	30	11.0,	247.7,	190.4,	-167.5,	12.0,
31	11.0,	240.2,	214.0,	-179.2,	0.2,	32	11.0,	225.4,	231.0,	-185.5,	-11.7,
33	11.0,	203.8,	241.1,	-186.1,	-23.1,	34	11.0,	175.9,	243.8,	-181.1,	-33.9,
35	11.0,	142.7,	239.1,	-170.6,	-43.6,	36	11.0,	107.5,	229.9,	-157.7,	-53.2,

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** DIRECTION SPECIFIC BUILDING DIMENSIONS ***

SOURCE ID: STCK5

IFV	BH	BW	BL	XADJ	YADJ	IFV	BH	BW	BL	XADJ	YADJ
1	11.0,	126.8,	240.7,	-111.4,	-60.2,	2	11.0,	161.1,	247.7,	-106.0,	-57.1,
3	11.0,	190.4,	247.7,	-97.5,	-52.2,	4	11.0,	214.0,	240.2,	-86.0,	-45.8,
5	11.0,	231.0,	225.4,	-71.9,	-38.0,	6	11.0,	241.1,	203.8,	-55.6,	-29.1,
7	11.0,	243.8,	175.9,	-37.6,	-19.2,	8	11.0,	239.1,	142.7,	-18.4,	-8.8,
9	11.0,	229.9,	107.5,	1.3,	0.5,	10	11.0,	240.7,	126.8,	-3.2,	9.0,
11	11.0,	247.7,	161.1,	-23.5,	17.8,	12	11.0,	247.7,	190.4,	-43.0,	26.4,
13	11.0,	240.2,	214.0,	-61.1,	34.1,	14	11.0,	225.4,	231.0,	-77.5,	40.8,
15	11.0,	203.8,	241.1,	-91.5,	46.3,	16	11.0,	175.9,	243.8,	-102.7,	50.4,
17	11.0,	142.7,	239.1,	-110.8,	52.9,	18	11.0,	107.5,	229.9,	-115.5,	55.0,
19	11.0,	126.8,	240.7,	-129.3,	60.2,	20	11.0,	161.1,	247.7,	-141.7,	57.1,
21	11.0,	190.4,	247.7,	-150.2,	52.2,	22	11.0,	214.0,	240.2,	-154.2,	45.8,
23	11.0,	231.0,	225.4,	-153.6,	38.0,	24	11.0,	241.1,	203.8,	-148.2,	29.1,
25	11.0,	243.8,	175.9,	-138.4,	19.2,	26	11.0,	239.1,	142.7,	-124.3,	8.8,
27	11.0,	229.9,	107.5,	-108.8,	-0.5,	28	11.0,	240.7,	126.8,	-123.6,	-9.0,
29	11.0,	247.7,	161.1,	-137.6,	-17.8,	30	11.0,	247.7,	190.4,	-147.5,	-26.4,
31	11.0,	240.2,	214.0,	-152.8,	-34.1,	32	11.0,	225.4,	231.0,	-153.6,	-40.8,
33	11.0,	203.8,	241.1,	-149.6,	-46.3,	34	11.0,	175.9,	243.8,	-141.1,	-50.4,
35	11.0,	142.7,	239.1,	-128.4,	-52.9,	36	11.0,	107.5,	229.9,	-114.5,	-55.0,

SOURCE ID: STCK6

IFV	BH	BW	BL	XADJ	YADJ	IFV	BH	BW	BL	XADJ	YADJ

```
   1   11.0,  126.8,  240.7,  -65.5,  -51.4,      2   11.0,  161.1,  247.7,  -62.4,  -40.4,
   3   11.0,  190.4,  247.7,  -57.4,  -28.3,      4   11.0,  214.0,  240.2,  -50.7,  -15.3,
   5   11.0,  231.0,  225.4,  -42.4,   -1.8,      6   11.0,  241.1,  203.8,  -32.8,   11.7,
   7   11.0,  243.8,  175.9,  -22.2,   24.9,      8   11.0,  239.1,  142.7,  -11.0,   37.3,
   9   11.0,  229.9,  107.5,    0.6,   47.2,     10   11.0,  240.7,  126.8,  -12.1,   54.8,
  11   11.0,  247.7,  161.1,  -40.1,   61.4,     12   11.0,  247.7,  190.4,  -66.9,   66.5,
  13   11.0,  240.2,  214.0,  -91.7,   69.4,     14   11.0,  225.4,  231.0, -113.7,   70.3,
  15   11.0,  203.8,  241.1, -132.2,   69.1,     16   11.0,  175.9,  243.8, -146.8,   65.7,
  17   11.0,  142.7,  239.1, -156.9,   60.4,     18   11.0,  107.5,  229.9, -162.2,   54.3,
  19   11.0,  126.8,  240.7, -175.1,   51.4,     20   11.0,  161.1,  247.7, -185.3,   40.4,
  21   11.0,  190.4,  247.7, -190.3,   28.3,     22   11.0,  214.0,  240.2, -189.5,   15.3,
  23   11.0,  231.0,  225.4, -183.0,    1.8,     24   11.0,  241.1,  203.8, -170.9,  -11.7,
  25   11.0,  243.8,  175.9, -153.7,  -24.9,     26   11.0,  239.1,  142.7, -131.7,  -37.3,
  27   11.0,  229.9,  107.5, -108.1,  -47.2,     28   11.0,  240.7,  126.8, -114.8,  -54.8,
  29   11.0,  247.7,  161.1, -121.0,  -61.4,     30   11.0,  247.7,  190.4, -123.5,  -66.5,
  31   11.0,  240.2,  214.0, -122.3,  -69.4,     32   11.0,  225.4,  231.0, -117.3,  -70.3,
  33   11.0,  203.8,  241.1, -108.8,  -69.1,     34   11.0,  175.9,  243.8,  -97.0,  -65.7,
  35   11.0,  142.7,  239.1,  -82.2,  -60.4,     36   11.0,  107.5,  229.9,  -67.8,  -54.3,

*** AERMOD - VERSION 22112  ***   *** 19370 Redlands Avenue West  - new site plan                          ***        04/04/23
*** AERMET - VERSION  16216 ***   *** DPM Conc 2024-25 2YR                                               ***        18:43:28
                                                                                                                  PAGE  15
*** MODELOPTs:    RegDFAULT  CONC  ELEV  URBAN  ADJ_U*

                                    *** GRIDDED RECEPTOR NETWORK SUMMARY ***

                                  *** NETWORK ID: UCART1   ;  NETWORK TYPE: GRIDCART ***

                                        *** X-COORDINATES OF GRID ***
                                                  (METERS)

     479286.7,  479311.7,  479336.7,  479361.7,  479386.7,  479411.7,  479436.7,  479461.7,  479486.7,  479511.7,
     479536.7,  479561.7,  479586.7,  479611.7,  479636.7,  479661.7,  479686.7,  479711.7,  479736.7,  479761.7,
     479786.7,

                                        *** Y-COORDINATES OF GRID ***
                                                  (METERS)

    3742719.1, 3742744.1, 3742769.1, 3742794.1, 3742819.1, 3742844.1, 3742869.1, 3742894.1, 3742919.1, 3742944.1,
    3742969.1, 3742994.1, 3743019.1, 3743044.1, 3743069.1, 3743094.1, 3743119.1, 3743144.1, 3743169.1, 3743194.1,
    3743219.1,

*** AERMOD - VERSION 22112  ***   *** 19370 Redlands Avenue West  - new site plan                          ***        04/04/23
*** AERMET - VERSION  16216 ***   *** DPM Conc 2024-25 2YR                                               ***        18:43:28
                                                                                                                  PAGE  16
*** MODELOPTs:    RegDFAULT  CONC  ELEV  URBAN  ADJ_U*

                                  *** NETWORK ID: UCART1   ;  NETWORK TYPE: GRIDCART ***

                                      * ELEVATION HEIGHTS IN METERS *
```

Y-COORD (METERS)	X-COORD (METERS)								
	479286.72	479311.72	479336.72	479361.72	479386.72	479411.72	479436.72	479461.72	479486.72
3743219.09	442.70	442.70	442.50	442.20	442.10	441.90	441.50	441.10	441.10
3743194.09	442.70	442.60	442.60	442.50	442.20	442.10	441.80	441.30	441.10
3743169.09	442.60	442.50	442.50	442.40	442.30	442.20	442.00	441.60	441.20
3743144.09	442.60	442.50	442.50	442.40	442.30	442.20	442.10	441.90	441.40
3743119.09	442.60	442.60	442.50	442.40	442.40	442.30	442.10	442.00	441.60
3743094.09	442.60	442.60	442.50	442.50	442.40	442.30	442.10	442.00	441.80
3743069.09	442.50	442.40	442.40	442.30	442.20	442.10	442.10	442.00	441.90
3743044.09	442.60	442.50	442.50	442.40	442.30	442.20	442.20	442.10	442.00
3743019.09	442.60	442.50	442.40	442.30	442.20	442.20	442.20	442.10	441.90
3742994.09	442.60	442.40	442.30	442.20	442.20	442.10	442.00	442.00	441.90
3742969.09	442.50	442.40	442.30	442.20	442.20	442.10	442.00	442.00	441.90
3742944.09	442.60	442.40	442.30	442.30	442.20	442.10	442.10	442.00	442.00
3742919.09	442.40	442.20	442.20	442.10	442.00	442.00	441.90	441.80	441.80
3742894.09	442.40	442.30	442.20	442.10	442.10	442.00	442.00	441.90	441.90
3742869.09	442.40	442.30	442.20	442.20	442.20	442.10	442.10	442.00	441.90
3742844.09	442.30	442.10	442.10	442.20	442.20	442.10	442.10	442.00	441.80
3742819.09	442.10	441.70	441.80	442.10	442.00	441.80	441.90	441.90	441.60
3742794.09	442.00	441.60	441.70	442.00	441.90	441.70	441.60	441.60	441.40
3742769.09	441.90	441.50	441.70	441.90	441.80	441.60	441.60	441.70	441.50
3742744.09	441.80	441.40	441.50	441.80	441.70	441.50	441.50	441.50	441.40
3742719.09	441.60	441.30	441.40	441.70	441.60	441.30	441.20	441.20	441.10

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

* ELEVATION HEIGHTS IN METERS *

Y-COORD (METERS)	X-COORD (METERS)								
	479511.72	479536.72	479561.72	479586.72	479611.72	479636.72	479661.72	479686.72	479711.72
3743219.09	441.20	441.30	441.40	441.40	441.40	441.40	441.30	441.30	441.20
3743194.09	441.00	441.00	441.10	441.20	441.20	441.20	441.10	441.10	441.00
3743169.09	441.00	441.00	441.00	441.10	441.10	441.10	441.00	441.00	441.00
3743144.09	440.80	440.60	440.60	440.60	440.60	440.60	440.60	440.60	440.70
3743119.09	441.00	440.70	440.60	440.60	440.60	440.50	440.50	440.50	440.60
3743094.09	441.70	441.60	441.50	441.40	441.30	441.30	441.20	441.20	441.20
3743069.09	442.00	442.00	441.80	441.60	441.50	441.40	441.40	441.30	441.30
3743044.09	441.90	441.90	441.80	441.60	441.40	441.40	441.30	441.30	441.20
3743019.09	441.80	441.80	441.70	441.50	441.40	441.30	441.20	441.20	441.10
3742994.09	441.80	441.70	441.70	441.50	441.30	441.20	441.10	441.00	441.00
3742969.09	441.80	441.70	441.60	441.50	441.30	441.20	441.10	441.00	440.90

3742944.09	441.90	441.70	441.50	441.40	441.30	441.20	441.10	441.00	440.90
3742919.09	441.70	441.60	441.50	441.40	441.40	441.30	441.10	441.00	441.00
3742894.09	441.80	441.70	441.50	441.40	441.40	441.30	441.20	441.10	441.00
3742869.09	441.80	441.80	441.60	441.40	441.30	441.20	441.10	441.00	441.00
3742844.09	441.70	441.70	441.70	441.40	441.00	441.00	441.00	440.90	440.90
3742819.09	441.40	441.40	441.40	441.10	440.70	440.60	440.80	440.80	440.80
3742794.09	441.20	441.10	441.00	440.80	440.60	440.40	440.50	440.70	440.70
3742769.09	441.30	441.20	441.10	441.00	440.80	440.50	440.30	440.50	440.60
3742744.09	441.30	441.10	441.10	441.00	440.80	440.50	440.20	440.20	440.50
3742719.09	441.00	440.90	440.80	440.60	440.50	440.40	440.20	440.00	440.20

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

* ELEVATION HEIGHTS IN METERS *

Y-COORD (METERS)	X-COORD (METERS) 479736.72	479761.72	479786.72
3743219.09	441.00	440.60	440.60
3743194.09	440.90	440.70	440.70
3743169.09	440.90	440.70	440.80
3743144.09	440.80	440.90	440.90
3743119.09	440.80	441.00	441.00
3743094.09	441.20	441.20	441.10
3743069.09	441.20	441.20	441.00
3743044.09	441.10	441.10	440.90
3743019.09	441.00	441.00	440.80
3742994.09	440.90	440.80	440.70
3742969.09	440.80	440.70	440.60
3742944.09	440.80	440.70	440.60
3742919.09	440.80	440.80	440.70
3742894.09	440.90	440.80	440.70
3742869.09	440.90	440.80	440.70
3742844.09	440.80	440.80	440.70
3742819.09	440.70	440.60	440.60
3742794.09	440.60	440.50	440.50
3742769.09	440.60	440.50	440.40
3742744.09	440.50	440.40	440.40
3742719.09	440.40	440.40	440.30

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

* HILL HEIGHT SCALES IN METERS *

Y-COORD (METERS)	X-COORD (METERS)								
	479286.72	479311.72	479336.72	479361.72	479386.72	479411.72	479436.72	479461.72	479486.72
3743219.09	442.70	442.70	442.50	442.20	442.10	441.90	441.50	441.10	441.10
3743194.09	442.70	442.60	442.60	442.50	442.20	442.10	441.80	441.30	441.10
3743169.09	442.60	442.50	442.50	442.40	442.30	442.20	442.00	441.60	441.20
3743144.09	442.60	442.50	442.50	442.40	442.30	442.20	442.10	441.90	441.40
3743119.09	442.60	442.60	442.50	442.40	442.40	442.30	442.10	442.00	441.60
3743094.09	442.60	442.60	442.50	442.50	442.40	442.30	442.10	442.00	441.80
3743069.09	442.50	442.40	442.40	442.30	442.20	442.10	442.10	442.00	441.90
3743044.09	442.60	442.50	442.50	442.40	442.30	442.20	442.20	442.10	442.00
3743019.09	442.60	442.50	442.40	442.30	442.20	442.20	442.20	442.10	441.90
3742994.09	442.60	442.40	442.30	442.20	442.20	442.10	442.00	442.00	441.90
3742969.09	442.50	442.40	442.30	442.20	442.20	442.10	442.00	442.00	441.90
3742944.09	442.60	442.40	442.30	442.30	442.20	442.10	442.10	442.00	442.00
3742919.09	442.40	442.20	442.20	442.10	442.00	442.00	441.90	441.80	441.80
3742894.09	442.40	442.30	442.20	442.10	442.10	442.00	442.00	441.90	441.90
3742869.09	442.40	442.30	442.20	442.20	442.20	442.10	442.10	442.00	441.90
3742844.09	442.30	442.10	442.10	442.20	442.20	442.10	442.10	442.00	441.80
3742819.09	442.10	441.70	441.80	442.10	442.00	441.80	441.90	441.90	441.60
3742794.09	442.00	441.60	441.70	442.00	441.90	441.70	441.60	441.60	441.40
3742769.09	441.90	441.50	441.70	441.90	441.80	441.60	441.60	441.70	441.50
3742744.09	441.80	441.40	441.50	441.80	441.70	441.50	441.50	441.50	441.40
3742719.09	441.60	441.30	441.40	441.70	441.60	441.30	441.20	441.20	441.10

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

* HILL HEIGHT SCALES IN METERS *

Y-COORD (METERS)	X-COORD (METERS)								
	479511.72	479536.72	479561.72	479586.72	479611.72	479636.72	479661.72	479686.72	479711.72
3743219.09	441.20	441.30	441.40	441.40	441.40	441.40	441.30	441.30	441.20
3743194.09	441.00	441.00	441.10	441.20	441.20	441.20	441.10	441.10	441.00
3743169.09	441.00	441.00	441.00	441.10	441.10	441.10	441.00	441.00	441.00
3743144.09	440.80	440.60	440.60	440.60	440.60	440.60	440.60	440.60	440.70
3743119.09	441.00	440.70	440.60	440.60	440.60	440.50	440.50	440.50	440.60
3743094.09	441.70	441.60	441.50	441.40	441.30	441.30	441.20	441.20	441.20
3743069.09	442.00	442.00	441.80	441.60	441.50	441.40	441.40	441.30	441.30
3743044.09	441.90	441.90	441.80	441.60	441.40	441.40	441.30	441.30	441.20

3743019.09	441.80	441.80	441.70	441.50	441.40	441.30	441.20	441.20	441.10
3742994.09	441.80	441.70	441.70	441.50	441.30	441.20	441.10	441.00	441.00
3742969.09	441.80	441.70	441.60	441.50	441.30	441.20	441.10	441.00	440.90
3742944.09	441.90	441.70	441.50	441.40	441.30	441.20	441.10	441.00	440.90
3742919.09	441.70	441.60	441.50	441.40	441.40	441.30	441.10	441.00	441.00
3742894.09	441.80	441.70	441.50	441.40	441.40	441.30	441.20	441.10	441.00
3742869.09	441.80	441.80	441.60	441.40	441.30	441.20	441.10	441.00	441.00
3742844.09	441.70	441.70	441.70	441.40	441.00	441.00	441.00	440.90	440.90
3742819.09	441.40	441.40	441.40	441.10	440.70	440.60	440.80	440.80	440.80
3742794.09	441.20	441.10	441.00	440.80	440.60	440.40	440.50	440.70	440.70
3742769.09	441.30	441.20	441.10	441.00	440.80	440.50	440.30	440.50	440.60
3742744.09	441.30	441.10	441.10	441.00	440.80	440.50	440.20	440.20	440.50
3742719.09	441.00	440.90	440.80	440.60	440.50	440.40	440.20	440.00	440.20

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

* HILL HEIGHT SCALES IN METERS *

Y-COORD (METERS)	X-COORD (METERS) 479736.72	479761.72	479786.72
3743219.09	441.00	440.60	440.60
3743194.09	440.90	440.70	440.70
3743169.09	440.90	440.70	440.80
3743144.09	440.80	440.90	440.90
3743119.09	440.80	441.00	441.00
3743094.09	441.20	441.20	441.10
3743069.09	441.20	441.20	441.00
3743044.09	441.10	441.10	440.90
3743019.09	441.00	441.00	440.80
3742994.09	440.90	440.80	440.70
3742969.09	440.80	440.70	440.60
3742944.09	440.80	440.70	440.60
3742919.09	440.80	440.80	440.70
3742894.09	440.90	440.80	440.70
3742869.09	440.90	440.80	440.70
3742844.09	440.80	440.80	440.70
3742819.09	440.70	440.60	440.60
3742794.09	440.60	440.50	440.50
3742769.09	440.60	440.50	440.40
3742744.09	440.50	440.40	440.40
3742719.09	440.40	440.40	440.30

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** DISCRETE CARTESIAN RECEPTORS ***
(X-COORD, Y-COORD, ZELEV, ZHILL, ZFLAG)
(METERS)

(	479365.8,	3743082.3,	442.4,	442.4,	0.0);	(	479387.2,	3743034.2,	442.3,	442.3,	0.0);
(	479424.4,	3742962.4,	442.1,	442.1,	0.0);	(	479458.5,	3742888.6,	441.9,	441.9,	0.0);
(	479491.7,	3742826.1,	441.6,	441.6,	0.0);	(	479707.3,	3742739.3,	440.4,	440.4,	0.0);
(	479568.5,	3743368.4,	440.7,	440.7,	0.0);	(	479517.3,	3743358.8,	441.1,	441.1,	0.0);

*** AERMOD - VERSION 22112 *** *** 19370 Redlands Avenue West - new site plan *** 04/04/23
*** AERMET - VERSION 16216 *** *** DPM Conc 2024-25 2YR *** 18:43:28

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

* SOURCE-RECEPTOR COMBINATIONS FOR WHICH CALCULATIONS MAY NOT BE PERFORMED *
LESS THAN 1.0 METER; WITHIN OPENPIT; OR BEYOND 80KM FOR FASTAREA/FASTALL

SOURCE ID	- - RECEPTOR LOCATION - - XR (METERS)	YR (METERS)	DISTANCE (METERS)
L0000256	479511.7	3742869.1	-3.98
L0000257	479511.7	3742869.1	-2.15
L0000259	479511.7	3742894.1	-1.57
L0000262	479486.7	3742919.1	0.50
L0000263	479486.7	3742919.1	-3.25
L0000265	479486.7	3742944.1	-1.78
L0000266	479486.7	3742944.1	-1.89
L0000269	479461.7	3742969.1	-0.30
L0000271	479461.7	3742994.1	0.31
L0000272	479461.7	3742994.1	-7.75
L0000273	479461.7	3742994.1	-0.47
L0000274	479461.7	3743019.1	0.48
L0000275	479461.7	3743019.1	-6.77
L0000276	479461.7	3743019.1	-0.12
L0000277	479461.7	3743044.1	-0.50
L0000278	479461.7	3743044.1	-7.84
L0000279	479461.7	3743044.1	0.53
L0000281	479461.7	3743069.1	-0.95
L0000286	479511.7	3743094.1	-0.86
L0000287	479511.7	3743094.1	-7.37
L0000288	479511.7	3743094.1	0.64
L0000289	479536.7	3743094.1	-0.06
L0000290	479536.7	3743094.1	-3.32
L0000293	479561.7	3743094.1	-1.70
L0000295	479586.7	3743094.1	0.47
L0000296	479586.7	3743094.1	-1.82

L0000298	479611.7	3743094.1	-0.31
L0000299	479611.7	3743094.1	-1.83
L0000301	479636.7	3743094.1	-1.07
L0000302	479636.7	3743094.1	-1.74
L0000304	479661.7	3743094.1	-1.82
L0000306	479661.7	3742869.1	-0.45
L0000309	479661.7	3742894.1	0.25
L0000312	479661.7	3742919.1	0.46
L0000315	479661.7	3742944.1	0.74
L0000317	479661.7	3742969.1	0.97
L0000320	479661.7	3742994.1	0.66
L0000323	479661.7	3743019.1	0.40
L0000326	479661.7	3743044.1	0.21
L0000329	479661.7	3743069.1	0.08

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

* SOURCE-RECEPTOR COMBINATIONS FOR WHICH CALCULATIONS MAY NOT BE PERFORMED *
LESS THAN 1.0 METER; WITHIN OPENPIT; OR BEYOND 80KM FOR FASTAREA/FASTALL

SOURCE ID	- - RECEPTOR LOCATION - - XR (METERS)	YR (METERS)	DISTANCE (METERS)
L0000332	479661.7	3743094.1	0.01
L0000334	479661.7	3743119.1	-0.08
L0000337	479661.7	3743144.1	-0.89
L0000340	479661.7	3743169.1	-1.65
L0000343	479661.7	3743194.1	-2.36
L0000346	479661.7	3743219.1	-2.99

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** METEOROLOGICAL DAYS SELECTED FOR PROCESSING ***
(1=YES; 0=NO)

```
1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1  1 1 1 1 1
```

NOTE: METEOROLOGICAL DATA ACTUALLY PROCESSED WILL ALSO DEPEND ON WHAT IS INCLUDED IN THE DATA FILE.

*** UPPER BOUND OF FIRST THROUGH FIFTH WIND SPEED CATEGORIES ***
(METERS/SEC)

1.54, 3.09, 5.14, 8.23, 10.80,

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** UP TO THE FIRST 24 HOURS OF METEOROLOGICAL DATA ***

Surface file: E:\New MET data\PERI_V9_ADJU\PERI_v9.SFC Met Version: 16216
Profile file: E:\New MET data\PERI_V9_ADJU\PERI_v9.PFL
Surface format: FREE
Profile format: FREE
Surface station no.: 3171 Upper air station no.: 3190
Name: UNKNOWN Name: UNKNOWN
Year: 2010 Year: 2010

First 24 hours of scalar data

YR	MO	DY	JDY	HR	H0	U*	W*	DT/DZ	ZICNV	ZIMCH	M-O LEN	Z0	BOWEN	ALBEDO	REF WS	WD	HT	REF TA	HT
10	01	01	1	01	-7.9	0.125	-9.000	-9.000	-999.	106.	21.2	0.19	0.61	1.00	1.30	335.	9.1	282.5	5.5
10	01	01	1	02	-3.9	0.088	-9.000	-9.000	-999.	62.	15.1	0.19	0.61	1.00	0.90	142.	9.1	280.9	5.5
10	01	01	1	03	-3.9	0.088	-9.000	-9.000	-999.	62.	15.1	0.19	0.61	1.00	0.90	324.	9.1	280.4	5.5
10	01	01	1	04	-1.3	0.064	-9.000	-9.000	-999.	39.	18.3	0.19	0.61	1.00	0.40	294.	9.1	278.8	5.5
10	01	01	1	05	-3.9	0.088	-9.000	-9.000	-999.	62.	15.0	0.19	0.61	1.00	0.90	205.	9.1	278.1	5.5
10	01	01	1	06	-1.3	0.065	-9.000	-9.000	-999.	39.	18.3	0.19	0.61	1.00	0.40	3.	9.1	277.0	5.5
10	01	01	1	07	-8.0	0.125	-9.000	-9.000	-999.	106.	21.0	0.19	0.61	1.00	1.30	99.	9.1	277.0	5.5
10	01	01	1	08	-3.3	0.086	-9.000	-9.000	-999.	61.	16.8	0.19	0.61	0.54	0.90	319.	9.1	278.8	5.5
10	01	01	1	09	20.1	0.128	0.307	0.010	49.	110.	-9.0	0.19	0.61	0.33	0.90	239.	9.1	284.2	5.5
10	01	01	1	10	56.7	0.087	0.560	0.010	107.	62.	-1.0	0.19	0.61	0.26	0.40	188.	9.1	289.2	5.5
10	01	01	1	11	81.5	0.323	0.867	0.008	277.	441.	-35.9	0.19	0.61	0.23	2.70	310.	9.1	290.9	5.5
10	01	01	1	12	97.1	0.281	1.058	0.008	421.	357.	-19.7	0.19	0.61	0.22	2.20	357.	9.1	293.1	5.5
10	01	01	1	13	92.2	0.279	1.117	0.008	523.	354.	-20.4	0.19	0.61	0.22	2.20	356.	9.1	293.8	5.5
10	01	01	1	14	77.6	0.275	1.102	0.008	595.	347.	-23.2	0.19	0.61	0.23	2.20	50.	9.1	294.2	5.5
10	01	01	1	15	54.9	0.230	1.006	0.008	640.	266.	-19.2	0.19	0.61	0.27	1.80	53.	9.1	293.8	5.5
10	01	01	1	16	12.3	0.206	0.613	0.008	648.	225.	-61.5	0.19	0.61	0.36	1.80	11.	9.1	292.5	5.5
10	01	01	1	17	-3.6	0.087	-9.000	-9.000	-999.	71.	15.6	0.19	0.61	0.64	0.90	351.	9.1	290.4	5.5
10	01	01	1	18	-3.8	0.087	-9.000	-9.000	-999.	62.	15.2	0.19	0.61	1.00	0.90	186.	9.1	287.5	5.5
10	01	01	1	19	-3.8	0.087	-9.000	-9.000	-999.	62.	15.2	0.19	0.61	1.00	0.90	275.	9.1	285.9	5.5
10	01	01	1	20	-1.2	0.064	-9.000	-9.000	-999.	39.	18.1	0.19	0.61	1.00	0.40	181.	9.1	285.4	5.5
10	01	01	1	21	-7.8	0.125	-9.000	-9.000	-999.	106.	21.3	0.19	0.61	1.00	1.30	318.	9.1	284.9	5.5
10	01	01	1	22	-3.8	0.088	-9.000	-9.000	-999.	62.	15.1	0.19	0.61	1.00	0.90	196.	9.1	283.1	5.5
10	01	01	1	23	-3.8	0.088	-9.000	-9.000	-999.	62.	15.1	0.19	0.61	1.00	0.90	330.	9.1	281.4	5.5

```
10 01 01   1 24   -7.9  0.125 -9.000 -9.000 -999.  106.     21.2  0.19   0.61   1.00    1.30  332.    9.1  280.9    5.5


First hour of profile data
YR MO DY HR HEIGHT F  WDIR    WSPD AMB_TMP sigmaA  sigmaW  sigmaV
10 01 01 01    5.5 0 -999.  -99.00   282.6   99.0  -99.00  -99.00
10 01 01 01    9.1 1  335.    1.30  -999.0   99.0  -99.00  -99.00

F indicates top of profile (=1) or below (=0)

*** AERMOD - VERSION 22112  ***   *** 19370 Redlands Avenue West  - new site plan                          ***        04/04/23
*** AERMET - VERSION  16216 ***   *** DPM Conc 2024-25 2YR                                               ***        18:43:28
                                                                                                                    PAGE  27
*** MODELOPTs:    RegDFAULT  CONC  ELEV  URBAN  ADJ_U*

                          *** THE PERIOD ( 43824 HRS) AVERAGE CONCENTRATION   VALUES FOR SOURCE GROUP: ALL      ***
                              INCLUDING SOURCE(S):     STCK1       , STCK2       , STCK3       , STCK4       , STCK5       ,
               STCK6       , L0000239    , L0000240    , L0000241    , L0000242    , L0000243    , L0000244    , L0000245    ,
               L0000246    , L0000247    , L0000248    , L0000249    , L0000250    , L0000251    , L0000252    , L0000253    ,
               L0000254    , L0000255    , L0000256    , L0000257    , L0000258    , L0000259    , L0000260    ,  . . .      ,

                               *** NETWORK ID: UCART1   ;  NETWORK TYPE: GRIDCART ***

                                    ** CONC OF DPM      IN MICROGRAMS/M**3                        **

   Y-COORD  |                                          X-COORD (METERS)
   (METERS) |     479286.72    479311.72    479336.72    479361.72    479386.72    479411.72    479436.72    479461.72    479486.72
- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - -

 3743219.09 |       0.00120      0.00137      0.00157      0.00179      0.00205      0.00233      0.00263      0.00293      0.00321
 3743194.09 |       0.00122      0.00140      0.00160      0.00185      0.00215      0.00248      0.00285      0.00324      0.00362
 3743169.09 |       0.00123      0.00141      0.00164      0.00191      0.00224      0.00263      0.00309      0.00360      0.00412
 3743144.09 |       0.00124      0.00143      0.00166      0.00196      0.00232      0.00279      0.00336      0.00404      0.00480
 3743119.09 |       0.00124      0.00143      0.00168      0.00199      0.00240      0.00294      0.00369      0.00466      0.00619
 3743094.09 |       0.00124      0.00144      0.00169      0.00201      0.00246      0.00309      0.00413      0.00604      0.00864
 3743069.09 |       0.00124      0.00144      0.00169      0.00203      0.00251      0.00329      0.00472      0.00747      0.00864
 3743044.09 |       0.00123      0.00143      0.00167      0.00202      0.00252      0.00341      0.00515      0.00613      0.00736
 3743019.09 |       0.00122      0.00141      0.00166      0.00200      0.00252      0.00340      0.00521      0.00593      0.00677
 3742994.09 |       0.00120      0.00139      0.00163      0.00196      0.00243      0.00334      0.00483      0.00564      0.00672
 3742969.09 |       0.00118      0.00136      0.00158      0.00189      0.00235      0.00310      0.00442      0.00642      0.00710
 3742944.09 |       0.00115      0.00132      0.00153      0.00181      0.00219      0.00287      0.00383      0.00544      0.00650
 3742919.09 |       0.00113      0.00129      0.00148      0.00172      0.00206      0.00256      0.00344      0.00446      0.00628
 3742894.09 |       0.00109      0.00124      0.00141      0.00163      0.00192      0.00232      0.00302      0.00400      0.00582
 3742869.09 |       0.00105      0.00119      0.00135      0.00154      0.00178      0.00210      0.00260      0.00348      0.00474
 3742844.09 |       0.00101      0.00113      0.00127      0.00144      0.00164      0.00191      0.00226      0.00283      0.00381
 3742819.09 |       0.00097      0.00108      0.00120      0.00134      0.00151      0.00172      0.00200      0.00237      0.00291
 3742794.09 |       0.00092      0.00101      0.00112      0.00124      0.00138      0.00156      0.00177      0.00204      0.00241
 3742769.09 |       0.00087      0.00095      0.00105      0.00115      0.00127      0.00140      0.00157      0.00178      0.00205
 3742744.09 |       0.00082      0.00089      0.00097      0.00106      0.00116      0.00127      0.00141      0.00157      0.00178
 3742719.09 |       0.00077      0.00083      0.00090      0.00098      0.00106      0.00116      0.00126      0.00140      0.00156
```

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** THE PERIOD (43824 HRS) AVERAGE CONCENTRATION VALUES FOR SOURCE GROUP: ALL ***
INCLUDING SOURCE(S): STCK1 , STCK2 , STCK3 , STCK4 , STCK5 ,
STCK6 , L0000239 , L0000240 , L0000241 , L0000242 , L0000243 , L0000244 , L0000245 ,
L0000246 , L0000247 , L0000248 , L0000249 , L0000250 , L0000251 , L0000252 , L0000253 ,
L0000254 , L0000255 , L0000256 , L0000257 , L0000258 , L0000259 , L0000260 , . . . ,

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

** CONC OF DPM IN MICROGRAMS/M**3 **

Y-COORD (METERS)	X-COORD (METERS)								
	479511.72	479536.72	479561.72	479586.72	479611.72	479636.72	479661.72	479686.72	479711.72
3743219.09	0.00343	0.00357	0.00362	0.00360	0.00356	0.00365	0.00428	0.00346	0.00254
3743194.09	0.00394	0.00415	0.00425	0.00423	0.00414	0.00411	0.00459	0.00373	0.00271
3743169.09	0.00461	0.00497	0.00518	0.00520	0.00499	0.00472	0.00497	0.00401	0.00287
3743144.09	0.00553	0.00630	0.00692	0.00697	0.00651	0.00579	0.00541	0.00424	0.00299
3743119.09	0.00753	0.00852	0.00947	0.00927	0.00863	0.00734	0.00622	0.00453	0.00308
3743094.09	0.00818	0.01039	0.01488	0.01445	0.01344	0.00911	0.00621	0.00470	0.00326
3743069.09	0.00825	0.00983	0.01882	0.01967	0.01854	0.01243	0.00657	0.00496	0.00342
3743044.09	0.00785	0.00969	0.01951	0.02054	0.01919	0.01338	0.00649	0.00497	0.00353
3743019.09	0.00766	0.00982	0.02003	0.02086	0.01965	0.01346	0.00649	0.00483	0.00351
3742994.09	0.00752	0.00980	0.02032	0.02119	0.01972	0.01338	0.00651	0.00478	0.00348
3742969.09	0.00755	0.00972	0.02027	0.02125	0.01980	0.01328	0.00653	0.00475	0.00346
3742944.09	0.00745	0.00961	0.01974	0.02080	0.01968	0.01311	0.00649	0.00483	0.00351
3742919.09	0.00786	0.01048	0.01910	0.02011	0.01945	0.01290	0.00650	0.00491	0.00362
3742894.09	0.00793	0.01482	0.01806	0.01891	0.01856	0.01244	0.00657	0.00500	0.00379
3742869.09	0.00668	0.01281	0.01526	0.01589	0.01556	0.01126	0.00706	0.00511	0.00381
3742844.09	0.00544	0.00794	0.00877	0.00944	0.00968	0.00895	0.00678	0.00489	0.00352
3742819.09	0.00378	0.00500	0.00617	0.00693	0.00702	0.00659	0.00559	0.00437	0.00345
3742794.09	0.00289	0.00354	0.00435	0.00492	0.00506	0.00478	0.00446	0.00397	0.00332
3742769.09	0.00239	0.00279	0.00325	0.00365	0.00387	0.00389	0.00376	0.00350	0.00307
3742744.09	0.00203	0.00233	0.00265	0.00296	0.00317	0.00325	0.00320	0.00305	0.00279
3742719.09	0.00176	0.00198	0.00223	0.00247	0.00265	0.00275	0.00275	0.00267	0.00250

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** THE PERIOD (43824 HRS) AVERAGE CONCENTRATION VALUES FOR SOURCE GROUP: ALL ***
INCLUDING SOURCE(S): STCK1 , STCK2 , STCK3 , STCK4 , STCK5 ,
STCK6 , L0000239 , L0000240 , L0000241 , L0000242 , L0000243 , L0000244 , L0000245 ,
L0000246 , L0000247 , L0000248 , L0000249 , L0000250 , L0000251 , L0000252 , L0000253 ,
L0000254 , L0000255 , L0000256 , L0000257 , L0000258 , L0000259 , L0000260 , . . . ,

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

** CONC OF DPM IN MICROGRAMS/M**3 **

Y-COORD (METERS)	X-COORD (METERS)		
	479736.72	479761.72	479786.72
3743219.09	0.00207	0.00175	0.00150
3743194.09	0.00218	0.00182	0.00156
3743169.09	0.00228	0.00189	0.00160
3743144.09	0.00236	0.00194	0.00164
3743119.09	0.00242	0.00198	0.00167
3743094.09	0.00249	0.00202	0.00169
3743069.09	0.00259	0.00206	0.00172
3743044.09	0.00270	0.00212	0.00174
3743019.09	0.00277	0.00217	0.00177
3742994.09	0.00277	0.00221	0.00180
3742969.09	0.00281	0.00224	0.00183
3742944.09	0.00289	0.00228	0.00186
3742919.09	0.00295	0.00230	0.00189
3742894.09	0.00294	0.00231	0.00191
3742869.09	0.00287	0.00231	0.00193
3742844.09	0.00282	0.00231	0.00193
3742819.09	0.00279	0.00230	0.00193
3742794.09	0.00273	0.00227	0.00192
3742769.09	0.00262	0.00222	0.00189
3742744.09	0.00246	0.00213	0.00185
3742719.09	0.00228	0.00202	0.00178

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** THE PERIOD (43824 HRS) AVERAGE CONCENTRATION VALUES FOR SOURCE GROUP: ALL ***
INCLUDING SOURCE(S): STCK1 , STCK2 , STCK3 , STCK4 , STCK5 ,
STCK6 , L0000239 , L0000240 , L0000241 , L0000242 , L0000243 , L0000244 , L0000245 ,
L0000246 , L0000247 , L0000248 , L0000249 , L0000250 , L0000251 , L0000252 , L0000253 ,
L0000254 , L0000255 , L0000256 , L0000257 , L0000258 , L0000259 , L0000260 , . . . ,

*** DISCRETE CARTESIAN RECEPTOR POINTS ***

** CONC OF DPM IN MICROGRAMS/M**3 **

X-COORD (M)	Y-COORD (M)	CONC	X-COORD (M)	Y-COORD (M)	CONC
479365.78	3743082.33	0.00209	479387.25	3743034.16	0.00253
479424.43	3742962.42	0.00363	479458.46	3742888.59	0.00376
479491.70	3742826.08	0.00330	479707.32	3742739.31	0.00278
479568.49	3743368.43	0.00183	479517.30	3743358.85	0.00187

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** THE SUMMARY OF MAXIMUM PERIOD (43824 HRS) RESULTS ***

** CONC OF DPM IN MICROGRAMS/M**3 **

GROUP ID	AVERAGE CONC	RECEPTOR (XR, YR, ZELEV, ZHILL, ZFLAG)	OF TYPE	NETWORK GRID-ID
ALL	1ST HIGHEST VALUE IS	0.02125 AT (479586.72, 3742969.09, 441.50, 441.50, 0.00)	GC	UCART1
	2ND HIGHEST VALUE IS	0.02119 AT (479586.72, 3742994.09, 441.50, 441.50, 0.00)	GC	UCART1
	3RD HIGHEST VALUE IS	0.02086 AT (479586.72, 3743019.09, 441.50, 441.50, 0.00)	GC	UCART1
	4TH HIGHEST VALUE IS	0.02080 AT (479586.72, 3742944.09, 441.40, 441.40, 0.00)	GC	UCART1
	5TH HIGHEST VALUE IS	0.02054 AT (479586.72, 3743044.09, 441.60, 441.60, 0.00)	GC	UCART1
	6TH HIGHEST VALUE IS	0.02032 AT (479561.72, 3742994.09, 441.70, 441.70, 0.00)	GC	UCART1
	7TH HIGHEST VALUE IS	0.02027 AT (479561.72, 3742969.09, 441.60, 441.60, 0.00)	GC	UCART1
	8TH HIGHEST VALUE IS	0.02011 AT (479586.72, 3742919.09, 441.40, 441.40, 0.00)	GC	UCART1
	9TH HIGHEST VALUE IS	0.02003 AT (479561.72, 3743019.09, 441.70, 441.70, 0.00)	GC	UCART1
	10TH HIGHEST VALUE IS	0.01980 AT (479611.72, 3742969.09, 441.30, 441.30, 0.00)	GC	UCART1

*** RECEPTOR TYPES: GC = GRIDCART
GP = GRIDPOLR
DC = DISCCART
DP = DISCPOLR

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** Message Summary : AERMOD Model Execution ***

--------- Summary of Total Messages --------

```
A Total of            0 Fatal Error Message(s)
A Total of           10 Warning Message(s)
A Total of         2028 Informational Message(s)

A Total of        43824 Hours Were Processed

A Total of          978 Calm Hours Identified

A Total of         1050 Missing Hours Identified (  2.40 Percent)


   ******** FATAL ERROR MESSAGES ********
             ***  NONE  ***


   ********   WARNING MESSAGES   ********
SO W320     290        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
SO W320     291        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
SO W320     292        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
SO W320     293        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
SO W320     294        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
SO W320     295        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
ME W186     719       MEOPEN: THRESH_1MIN 1-min ASOS wind speed threshold used          0.50
ME W187     719       MEOPEN: ADJ_U* Option for Stable Low Winds used in AERMET
MX W450   17521       CHKDAT: Record Out of Sequence in Meteorological File at:     14010101
MX W450   17521       CHKDAT: Record Out of Sequence in Meteorological File at:    2 year gap

   ***********************************
   *** AERMOD Finishes Successfully ***
   ***********************************
```

```
** Lakes Environmental AERMOD MPI
**
**************************************
**
** AERMOD Input Produced by:
** AERMOD View Ver. 11.2.0
** Lakes Environmental Software Inc.
** Date: 4/4/2023
** File: C:\Lakes\AERMOD View\19370 Redlands Avenue West 1st 14YR\19370 Redlands Avenue West 1st 14YR.ADI
**
**************************************
**
**
**************************************
** AERMOD Control Pathway
**************************************
**
**
CO STARTING
   TITLEONE 19370 Redlands Avenue West  - new site plan
   TITLETWO DPM Conc 2026-39  1st 14YR
   MODELOPT DFAULT CONC
   AVERTIME PERIOD
   URBANOPT 2189641 Riverside_County
   POLLUTID DPM
   RUNORNOT RUN
   ERRORFIL "19370 Redlands Avenue West 1st 14YR.err"
CO FINISHED
**
**************************************
** AERMOD Source Pathway
**************************************
**
**
SO STARTING
** Source Location **
** Source ID - Type - X Coord. - Y Coord. **
   LOCATION STCK1        POINT      479650.520  3743097.530      441.230
** DESCRSRC Idling location
   LOCATION STCK2        POINT      479648.780  3742857.061      441.140
** DESCRSRC Idling location
   LOCATION STCK3        POINT      479532.538  3743072.983      441.920
** DESCRSRC Idling location
   LOCATION STCK4        POINT      479531.377  3743020.952      441.800
** DESCRSRC Idling location
   LOCATION STCK5        POINT      479529.519  3742977.748      441.680
** DESCRSRC Idling location
   LOCATION STCK6        POINT      479530.216  3742931.060      441.680
** DESCRSRC Idling location
** ----------------------------------------------------------------------
** Line Source Represented by Adjacent Volume Sources
```

```
** LINE VOLUME Source ID = SLINE1
** DESCRSRC Onsite truck travel
** PREFIX
** Length of Side = 8.59
** Configuration = Adjacent
** Emission Rate = 9.96E-06
** Elevated
** Building Height = 10.97
** SZINIT = 5.10
** Nodes = 11
** 479659.651, 3742857.442, 441.11, 3.50, 4.00
** 479633.553, 3742854.794, 441.08, 3.50, 4.00
** 479531.052, 3742855.929, 441.83, 3.50, 4.00
** 479520.840, 3742857.442, 441.83, 3.50, 4.00
** 479472.804, 3742961.834, 441.98, 3.50, 4.00
** 479458.809, 3742999.658, 442.03, 3.50, 4.00
** 479461.079, 3743039.750, 442.18, 3.50, 4.00
** 479470.535, 3743073.413, 441.94, 3.50, 4.00
** 479507.980, 3743094.594, 441.71, 3.50, 4.00
** 479548.451, 3743101.024, 441.34, 3.50, 4.00
** 479661.543, 3743099.511, 441.23, 3.50, 4.00
** ----------------------------------------------------------------------
   LOCATION L0000411     VOLUME   479655.378 3742857.008 441.14
   LOCATION L0000412     VOLUME   479646.831 3742856.141 441.13
   LOCATION L0000413     VOLUME   479638.284 3742855.274 441.12
   LOCATION L0000414     VOLUME   479629.718 3742854.837 441.11
   LOCATION L0000415     VOLUME   479621.128 3742854.932 441.12
   LOCATION L0000416     VOLUME   479612.537 3742855.027 441.14
   LOCATION L0000417     VOLUME   479603.947 3742855.122 441.15
   LOCATION L0000418     VOLUME   479595.357 3742855.217 441.29
   LOCATION L0000419     VOLUME   479586.766 3742855.312 441.44
   LOCATION L0000420     VOLUME   479578.176 3742855.407 441.58
   LOCATION L0000421     VOLUME   479569.586 3742855.502 441.65
   LOCATION L0000422     VOLUME   479560.996 3742855.597 441.72
   LOCATION L0000423     VOLUME   479552.405 3742855.692 441.79
   LOCATION L0000424     VOLUME   479543.815 3742855.788 441.80
   LOCATION L0000425     VOLUME   479535.225 3742855.883 441.81
   LOCATION L0000426     VOLUME   479526.682 3742856.576 441.82
   LOCATION L0000427     VOLUME   479519.717 3742859.881 441.83
   LOCATION L0000428     VOLUME   479516.126 3742867.685 441.83
   LOCATION L0000429     VOLUME   479512.535 3742875.489 441.85
   LOCATION L0000430     VOLUME   479508.944 3742883.294 441.86
   LOCATION L0000431     VOLUME   479505.353 3742891.098 441.84
   LOCATION L0000432     VOLUME   479501.762 3742898.902 441.83
   LOCATION L0000433     VOLUME   479498.171 3742906.706 441.80
   LOCATION L0000434     VOLUME   479494.580 3742914.510 441.78
   LOCATION L0000435     VOLUME   479490.989 3742922.315 441.84
   LOCATION L0000436     VOLUME   479487.398 3742930.119 441.89
   LOCATION L0000437     VOLUME   479483.807 3742937.923 441.95
   LOCATION L0000438     VOLUME   479480.216 3742945.727 442.00
   LOCATION L0000439     VOLUME   479476.625 3742953.532 441.98
```

```
   LOCATION L0000440     VOLUME   479473.033 3742961.336 441.97
   LOCATION L0000441     VOLUME   479470.013 3742969.377 441.95
   LOCATION L0000442     VOLUME   479467.032 3742977.434 441.95
   LOCATION L0000443     VOLUME   479464.051 3742985.491 441.98
   LOCATION L0000444     VOLUME   479461.070 3742993.548 442.00
   LOCATION L0000445     VOLUME   479458.927 3743001.730 442.03
   LOCATION L0000446     VOLUME   479459.412 3743010.307 442.06
   LOCATION L0000447     VOLUME   479459.898 3743018.884 442.10
   LOCATION L0000448     VOLUME   479460.383 3743027.461 442.15
   LOCATION L0000449     VOLUME   479460.869 3743036.039 442.19
   LOCATION L0000450     VOLUME   479462.397 3743044.442 442.13
   LOCATION L0000451     VOLUME   479464.720 3743052.713 442.06
   LOCATION L0000452     VOLUME   479467.043 3743060.983 442.00
   LOCATION L0000453     VOLUME   479469.366 3743069.254 441.95
   LOCATION L0000454     VOLUME   479474.252 3743075.516 441.92
   LOCATION L0000455     VOLUME   479481.729 3743079.745 441.90
   LOCATION L0000456     VOLUME   479489.207 3743083.975 441.87
   LOCATION L0000457     VOLUME   479496.684 3743088.205 441.81
   LOCATION L0000458     VOLUME   479504.162 3743092.434 441.74
   LOCATION L0000459     VOLUME   479512.132 3743095.254 441.67
   LOCATION L0000460     VOLUME   479520.616 3743096.602 441.61
   LOCATION L0000461     VOLUME   479529.101 3743097.950 441.56
   LOCATION L0000462     VOLUME   479537.585 3743099.298 441.50
   LOCATION L0000463     VOLUME   479546.069 3743100.646 441.43
   LOCATION L0000464     VOLUME   479554.630 3743100.941 441.40
   LOCATION L0000465     VOLUME   479563.220 3743100.827 441.36
   LOCATION L0000466     VOLUME   479571.810 3743100.712 441.32
   LOCATION L0000467     VOLUME   479580.400 3743100.597 441.28
   LOCATION L0000468     VOLUME   479588.990 3743100.482 441.26
   LOCATION L0000469     VOLUME   479597.580 3743100.367 441.23
   LOCATION L0000470     VOLUME   479606.170 3743100.252 441.21
   LOCATION L0000471     VOLUME   479614.760 3743100.137 441.19
   LOCATION L0000472     VOLUME   479623.350 3743100.022 441.17
   LOCATION L0000473     VOLUME   479631.940 3743099.907 441.16
   LOCATION L0000474     VOLUME   479640.530 3743099.792 441.16
   LOCATION L0000475     VOLUME   479649.120 3743099.677 441.16
   LOCATION L0000476     VOLUME   479657.710 3743099.562 441.16
** End of LINE VOLUME Source ID = SLINE1
** ----------------------------------------------------------------------
** Line Source Represented by Adjacent Volume Sources
** LINE VOLUME Source ID = SLINE2
** DESCRSRC Redlands Ave southern project driveway to northern project driveway
** PREFIX
** Length of Side = 8.59
** Configuration = Adjacent
** Emission Rate = 1.09E-06
** Elevated
** Vertical Dimension = 7.00
** SZINIT = 1.63
** Nodes = 3
** 479668.640, 3742857.589, 441.06, 3.50, 4.00
```

```
** 479670.318, 3742876.889, 441.14, 3.50, 4.00
** 479670.328, 3743099.110, 441.22, 3.50, 4.00
** ----------------------------------------------------------------------
   LOCATION L0000477     VOLUME   479669.012 3742861.868 441.08
   LOCATION L0000478     VOLUME   479669.756 3742870.427 441.10
   LOCATION L0000479     VOLUME   479670.318 3742878.993 441.13
   LOCATION L0000480     VOLUME   479670.319 3742887.584 441.14
   LOCATION L0000481     VOLUME   479670.319 3742896.175 441.13
   LOCATION L0000482     VOLUME   479670.320 3742904.766 441.13
   LOCATION L0000483     VOLUME   479670.320 3742913.356 441.12
   LOCATION L0000484     VOLUME   479670.320 3742921.947 441.09
   LOCATION L0000485     VOLUME   479670.321 3742930.538 441.06
   LOCATION L0000486     VOLUME   479670.321 3742939.129 441.04
   LOCATION L0000487     VOLUME   479670.322 3742947.720 441.02
   LOCATION L0000488     VOLUME   479670.322 3742956.310 441.02
   LOCATION L0000489     VOLUME   479670.322 3742964.901 441.02
   LOCATION L0000490     VOLUME   479670.323 3742973.492 441.02
   LOCATION L0000491     VOLUME   479670.323 3742982.083 441.05
   LOCATION L0000492     VOLUME   479670.323 3742990.674 441.09
   LOCATION L0000493     VOLUME   479670.324 3742999.264 441.12
   LOCATION L0000494     VOLUME   479670.324 3743007.855 441.16
   LOCATION L0000495     VOLUME   479670.325 3743016.446 441.20
   LOCATION L0000496     VOLUME   479670.325 3743025.037 441.23
   LOCATION L0000497     VOLUME   479670.325 3743033.628 441.27
   LOCATION L0000498     VOLUME   479670.326 3743042.218 441.30
   LOCATION L0000499     VOLUME   479670.326 3743050.809 441.33
   LOCATION L0000500     VOLUME   479670.327 3743059.400 441.35
   LOCATION L0000501     VOLUME   479670.327 3743067.991 441.37
   LOCATION L0000502     VOLUME   479670.327 3743076.582 441.32
   LOCATION L0000503     VOLUME   479670.328 3743085.172 441.28
   LOCATION L0000504     VOLUME   479670.328 3743093.763 441.23
** End of LINE VOLUME Source ID = SLINE2
** ----------------------------------------------------------------------
** Line Source Represented by Adjacent Volume Sources
** LINE VOLUME Source ID = SLINE3
** DESCRSRC Redlands Ave north of northern project driveway
** PREFIX
** Length of Side = 8.59
** Configuration = Adjacent
** Emission Rate = 6.06E-06
** Elevated
** Vertical Dimension = 7.00
** SZINIT = 1.63
** Nodes = 10
** 479670.085, 3743103.428, 441.03, 3.50, 4.00
** 479666.590, 3743250.337, 441.29, 3.50, 4.00
** 479665.586, 3743329.579, 440.69, 3.50, 4.00
** 479667.593, 3743384.748, 440.26, 3.50, 4.00
** 479673.611, 3743417.849, 439.90, 3.50, 4.00
** 479686.651, 3743467.000, 440.36, 3.50, 4.00
** 479693.672, 3743507.123, 440.49, 3.50, 4.00
```

```
** 479698.688, 3743551.258, 440.18, 3.50, 4.00
** 479700.694, 3743608.433, 439.59, 3.50, 4.00
** 479699.691, 3743771.933, 440.59, 3.50, 4.00
** ----------------------------------------------------------------
   LOCATION L0000505     VOLUME   479669.983 3743107.722 440.88
   LOCATION L0000506     VOLUME   479669.778 3743116.311 440.60
   LOCATION L0000507     VOLUME   479669.574 3743124.899 440.32
   LOCATION L0000508     VOLUME   479669.370 3743133.487 440.33
   LOCATION L0000509     VOLUME   479669.165 3743142.076 440.54
   LOCATION L0000510     VOLUME   479668.961 3743150.664 440.76
   LOCATION L0000511     VOLUME   479668.757 3743159.252 440.97
   LOCATION L0000512     VOLUME   479668.552 3743167.841 441.00
   LOCATION L0000513     VOLUME   479668.348 3743176.429 441.02
   LOCATION L0000514     VOLUME   479668.144 3743185.017 441.04
   LOCATION L0000515     VOLUME   479667.939 3743193.606 441.09
   LOCATION L0000516     VOLUME   479667.735 3743202.194 441.16
   LOCATION L0000517     VOLUME   479667.531 3743210.783 441.24
   LOCATION L0000518     VOLUME   479667.326 3743219.371 441.31
   LOCATION L0000519     VOLUME   479667.122 3743227.959 441.32
   LOCATION L0000520     VOLUME   479666.918 3743236.548 441.32
   LOCATION L0000521     VOLUME   479666.713 3743245.136 441.31
   LOCATION L0000522     VOLUME   479666.547 3743253.725 441.29
   LOCATION L0000523     VOLUME   479666.438 3743262.315 441.23
   LOCATION L0000524     VOLUME   479666.329 3743270.905 441.16
   LOCATION L0000525     VOLUME   479666.220 3743279.495 441.09
   LOCATION L0000526     VOLUME   479666.112 3743288.086 440.97
   LOCATION L0000527     VOLUME   479666.003 3743296.676 440.83
   LOCATION L0000528     VOLUME   479665.894 3743305.266 440.68
   LOCATION L0000529     VOLUME   479665.785 3743313.856 440.55
   LOCATION L0000530     VOLUME   479665.677 3743322.446 440.61
   LOCATION L0000531     VOLUME   479665.639 3743331.035 440.67
   LOCATION L0000532     VOLUME   479665.952 3743339.620 440.74
   LOCATION L0000533     VOLUME   479666.264 3743348.206 440.74
   LOCATION L0000534     VOLUME   479666.576 3743356.791 440.68
   LOCATION L0000535     VOLUME   479666.888 3743365.376 440.62
   LOCATION L0000536     VOLUME   479667.200 3743373.961 440.56
   LOCATION L0000537     VOLUME   479667.513 3743382.546 440.37
   LOCATION L0000538     VOLUME   479668.735 3743391.032 440.18
   LOCATION L0000539     VOLUME   479670.272 3743399.485 440.00
   LOCATION L0000540     VOLUME   479671.809 3743407.937 439.84
   LOCATION L0000541     VOLUME   479673.345 3743416.389 439.72
   LOCATION L0000542     VOLUME   479675.433 3743424.718 439.60
   LOCATION L0000543     VOLUME   479677.636 3743433.022 439.47
   LOCATION L0000544     VOLUME   479679.839 3743441.325 439.57
   LOCATION L0000545     VOLUME   479682.042 3743449.629 439.84
   LOCATION L0000546     VOLUME   479684.245 3743457.932 440.09
   LOCATION L0000547     VOLUME   479686.448 3743466.236 440.34
   LOCATION L0000548     VOLUME   479687.996 3743474.684 440.41
   LOCATION L0000549     VOLUME   479689.476 3743483.146 440.45
   LOCATION L0000550     VOLUME   479690.957 3743491.608 440.49
   LOCATION L0000551     VOLUME   479692.438 3743500.070 440.51
```

```
   LOCATION L0000552     VOLUME   479693.834 3743508.545 440.49
   LOCATION L0000553     VOLUME   479694.804 3743517.081 440.46
   LOCATION L0000554     VOLUME   479695.774 3743525.616 440.43
   LOCATION L0000555     VOLUME   479696.744 3743534.152 440.38
   LOCATION L0000556     VOLUME   479697.714 3743542.688 440.30
   LOCATION L0000557     VOLUME   479698.684 3743551.224 440.23
   LOCATION L0000558     VOLUME   479698.988 3743559.809 440.15
   LOCATION L0000559     VOLUME   479699.289 3743568.395 440.13
   LOCATION L0000560     VOLUME   479699.590 3743576.980 440.11
   LOCATION L0000561     VOLUME   479699.892 3743585.566 440.08
   LOCATION L0000562     VOLUME   479700.193 3743594.151 439.99
   LOCATION L0000563     VOLUME   479700.494 3743602.737 439.82
   LOCATION L0000564     VOLUME   479700.676 3743611.324 439.65
   LOCATION L0000565     VOLUME   479700.623 3743619.915 439.48
   LOCATION L0000566     VOLUME   479700.571 3743628.505 439.44
   LOCATION L0000567     VOLUME   479700.518 3743637.096 439.43
   LOCATION L0000568     VOLUME   479700.465 3743645.687 439.42
   LOCATION L0000569     VOLUME   479700.413 3743654.277 439.51
   LOCATION L0000570     VOLUME   479700.360 3743662.868 439.86
   LOCATION L0000571     VOLUME   479700.307 3743671.459 440.21
   LOCATION L0000572     VOLUME   479700.255 3743680.049 440.56
   LOCATION L0000573     VOLUME   479700.202 3743688.640 440.67
   LOCATION L0000574     VOLUME   479700.149 3743697.230 440.68
   LOCATION L0000575     VOLUME   479700.096 3743705.821 440.68
   LOCATION L0000576     VOLUME   479700.044 3743714.412 440.67
   LOCATION L0000577     VOLUME   479699.991 3743723.002 440.55
   LOCATION L0000578     VOLUME   479699.938 3743731.593 440.43
   LOCATION L0000579     VOLUME   479699.886 3743740.184 440.30
   LOCATION L0000580     VOLUME   479699.833 3743748.774 440.31
   LOCATION L0000581     VOLUME   479699.780 3743757.365 440.43
   LOCATION L0000582     VOLUME   479699.728 3743765.956 440.56
** End of LINE VOLUME Source ID = SLINE3
   LOCATION PAREA1       AREAPOLY   479547.338  3743092.751      441.610
** DESCRSRC Emergency pumps and back-up generator
** Source Parameters **
   SRCPARAM STCK1        0.0000109     3.500   366.000    51.816       0.1
   SRCPARAM STCK2        0.0000109     3.500   366.000    51.816       0.1
   SRCPARAM STCK3        0.0000109     3.500   366.000    51.816       0.1
   SRCPARAM STCK4        0.0000109     3.500   366.000    51.816       0.1
   SRCPARAM STCK5        0.0000109     3.500   366.000    51.816       0.1
   SRCPARAM STCK6        0.0000109     3.500   366.000    51.816       0.1
** LINE VOLUME Source ID = SLINE1
   SRCPARAM L0000411     0.0000001509      3.50      4.00      5.10
   SRCPARAM L0000412     0.0000001509      3.50      4.00      5.10
   SRCPARAM L0000413     0.0000001509      3.50      4.00      5.10
   SRCPARAM L0000414     0.0000001509      3.50      4.00      5.10
   SRCPARAM L0000415     0.0000001509      3.50      4.00      5.10
   SRCPARAM L0000416     0.0000001509      3.50      4.00      5.10
   SRCPARAM L0000417     0.0000001509      3.50      4.00      5.10
   SRCPARAM L0000418     0.0000001509      3.50      4.00      5.10
   SRCPARAM L0000419     0.0000001509      3.50      4.00      5.10
```

```
SRCPARAM L0000420     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000421     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000422     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000423     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000424     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000425     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000426     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000427     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000428     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000429     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000430     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000431     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000432     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000433     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000434     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000435     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000436     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000437     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000438     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000439     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000440     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000441     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000442     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000443     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000444     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000445     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000446     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000447     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000448     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000449     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000450     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000451     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000452     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000453     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000454     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000455     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000456     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000457     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000458     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000459     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000460     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000461     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000462     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000463     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000464     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000465     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000466     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000467     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000468     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000469     0.0000001509      3.50      4.00      5.10
SRCPARAM L0000470     0.0000001509      3.50      4.00      5.10
```

```
   SRCPARAM L0000471     0.0000001509      3.50      4.00      5.10
   SRCPARAM L0000472     0.0000001509      3.50      4.00      5.10
   SRCPARAM L0000473     0.0000001509      3.50      4.00      5.10
   SRCPARAM L0000474     0.0000001509      3.50      4.00      5.10
   SRCPARAM L0000475     0.0000001509      3.50      4.00      5.10
   SRCPARAM L0000476     0.0000001509      3.50      4.00      5.10
** ------------------------------------------------------------------
** LINE VOLUME Source ID = SLINE2
   SRCPARAM L0000477     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000478     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000479     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000480     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000481     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000482     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000483     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000484     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000485     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000486     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000487     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000488     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000489     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000490     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000491     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000492     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000493     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000494     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000495     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000496     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000497     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000498     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000499     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000500     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000501     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000502     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000503     0.00000003893      3.50      4.00      1.63
   SRCPARAM L0000504     0.00000003893      3.50      4.00      1.63
** ------------------------------------------------------------------
** LINE VOLUME Source ID = SLINE3
   SRCPARAM L0000505     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000506     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000507     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000508     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000509     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000510     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000511     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000512     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000513     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000514     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000515     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000516     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000517     0.00000007769      3.50      4.00      1.63
```

```
SRCPARAM L0000518     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000519     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000520     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000521     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000522     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000523     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000524     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000525     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000526     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000527     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000528     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000529     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000530     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000531     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000532     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000533     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000534     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000535     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000536     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000537     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000538     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000539     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000540     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000541     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000542     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000543     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000544     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000545     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000546     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000547     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000548     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000549     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000550     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000551     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000552     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000553     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000554     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000555     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000556     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000557     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000558     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000559     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000560     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000561     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000562     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000563     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000564     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000565     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000566     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000567     0.00000007769      3.50      4.00      1.63
SRCPARAM L0000568     0.00000007769      3.50      4.00      1.63
```

```
   SRCPARAM L0000569     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000570     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000571     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000572     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000573     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000574     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000575     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000576     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000577     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000578     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000579     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000580     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000581     0.00000007769      3.50      4.00      1.63
   SRCPARAM L0000582     0.00000007769      3.50      4.00      1.63
** ------------------------------------------------------------------
   SRCPARAM PAREA1       1.1741E-09     0.914        14
   AREAVERT PAREA1       479547.338 3743092.751 479616.111 3743092.448
   AREAVERT PAREA1       479617.323 3743090.631 479629.442 3743090.631
   AREAVERT PAREA1       479629.442 3743090.025 479635.963 3743089.709
   AREAVERT PAREA1       479637.980 3743055.833 479636.098 3742875.967
   AREAVERT PAREA1       479635.425 3742866.557 479616.471 3742865.347
   AREAVERT PAREA1       479613.782 3742863.599 479530.974 3742864.675
   AREAVERT PAREA1       479530.974 3742911.725 479545.492 3742911.187

** Building Downwash **
   BUILDHGT STCK1          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK1          10.97    10.97    10.97     0.00     0.00     0.00
   BUILDHGT STCK1           0.00     0.00     0.00     0.00     0.00     0.00
   BUILDHGT STCK1          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK1          10.97    10.97    10.97     0.00     0.00     0.00
   BUILDHGT STCK1           0.00     0.00     0.00     0.00     0.00     0.00

   BUILDHGT STCK2           0.00     0.00     0.00     0.00     0.00     0.00
   BUILDHGT STCK2           0.00     0.00     0.00    10.97    10.97    10.97
   BUILDHGT STCK2          10.97    10.97    10.97    10.97    10.97     0.00
   BUILDHGT STCK2           0.00     0.00     0.00     0.00     0.00     0.00
   BUILDHGT STCK2           0.00     0.00     0.00    10.97    10.97    10.97
   BUILDHGT STCK2          10.97    10.97    10.97    10.97    10.97     0.00

   BUILDHGT STCK3           0.00     0.00    10.97    10.97    10.97    10.97
   BUILDHGT STCK3          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK3          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK3           0.00     0.00    10.97    10.97    10.97    10.97
   BUILDHGT STCK3          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK3          10.97    10.97    10.97    10.97    10.97    10.97

   BUILDHGT STCK4          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK4          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK4          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK4          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK4          10.97    10.97    10.97    10.97    10.97    10.97
```

BUILDHGT STCK4	10.97	10.97	10.97	10.97	10.97	10.97
BUILDHGT STCK5	10.97	10.97	10.97	10.97	10.97	10.97
BUILDHGT STCK5	10.97	10.97	10.97	10.97	10.97	10.97
BUILDHGT STCK5	10.97	10.97	10.97	10.97	10.97	10.97
BUILDHGT STCK5	10.97	10.97	10.97	10.97	10.97	10.97
BUILDHGT STCK5	10.97	10.97	10.97	10.97	10.97	10.97
BUILDHGT STCK5	10.97	10.97	10.97	10.97	10.97	10.97
BUILDHGT STCK6	10.97	10.97	10.97	10.97	10.97	10.97
BUILDHGT STCK6	10.97	10.97	10.97	10.97	10.97	10.97
BUILDHGT STCK6	10.97	10.97	10.97	10.97	10.97	10.97
BUILDHGT STCK6	10.97	10.97	10.97	10.97	10.97	10.97
BUILDHGT STCK6	10.97	10.97	10.97	10.97	10.97	10.97
BUILDHGT STCK6	10.97	10.97	10.97	10.97	10.97	10.97
BUILDWID STCK1	126.83	161.07	190.42	213.98	231.04	241.08
BUILDWID STCK1	243.80	239.11	229.94	0.00	0.00	0.00
BUILDWID STCK1	0.00	0.00	0.00	0.00	0.00	0.00
BUILDWID STCK1	126.83	161.07	190.42	213.98	231.04	241.08
BUILDWID STCK1	243.80	239.11	229.94	0.00	0.00	0.00
BUILDWID STCK1	0.00	0.00	0.00	0.00	0.00	0.00
BUILDWID STCK2	0.00	0.00	0.00	0.00	0.00	0.00
BUILDWID STCK2	0.00	0.00	0.00	240.65	247.69	247.71
BUILDWID STCK2	240.21	225.41	203.76	175.92	142.73	0.00
BUILDWID STCK2	0.00	0.00	0.00	0.00	0.00	0.00
BUILDWID STCK2	0.00	0.00	0.00	240.65	247.69	247.71
BUILDWID STCK2	240.21	225.41	203.76	175.92	142.73	0.00
BUILDWID STCK3	0.00	0.00	190.42	213.98	231.04	241.08
BUILDWID STCK3	243.80	239.11	229.94	240.65	247.69	247.71
BUILDWID STCK3	240.21	225.41	203.76	175.92	142.73	107.53
BUILDWID STCK3	0.00	0.00	190.42	213.98	231.04	241.08
BUILDWID STCK3	243.80	239.11	229.94	240.65	247.69	247.71
BUILDWID STCK3	240.21	225.41	203.76	175.92	142.73	107.53
BUILDWID STCK4	126.83	161.07	190.42	213.98	231.04	241.08
BUILDWID STCK4	243.80	239.11	229.94	240.65	247.69	247.71
BUILDWID STCK4	240.21	225.41	203.76	175.92	142.73	107.53
BUILDWID STCK4	126.83	161.07	190.42	213.98	231.04	241.08
BUILDWID STCK4	243.80	239.11	229.94	240.65	247.69	247.71
BUILDWID STCK4	240.21	225.41	203.76	175.92	142.73	107.53
BUILDWID STCK5	126.83	161.07	190.42	213.98	231.04	241.08
BUILDWID STCK5	243.80	239.11	229.94	240.65	247.69	247.71
BUILDWID STCK5	240.21	225.41	203.76	175.92	142.73	107.53
BUILDWID STCK5	126.83	161.07	190.42	213.98	231.04	241.08
BUILDWID STCK5	243.80	239.11	229.94	240.65	247.69	247.71
BUILDWID STCK5	240.21	225.41	203.76	175.92	142.73	107.53

```
BUILDWID STCK6          126.83   161.07   190.42   213.98   231.04   241.08
BUILDWID STCK6          243.80   239.11   229.94   240.65   247.69   247.71
BUILDWID STCK6          240.21   225.41   203.76   175.92   142.73   107.53
BUILDWID STCK6          126.83   161.07   190.42   213.98   231.04   241.08
BUILDWID STCK6          243.80   239.11   229.94   240.65   247.69   247.71
BUILDWID STCK6          240.21   225.41   203.76   175.92   142.73   107.53

BUILDLEN STCK1          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK1          175.92   142.73   107.53     0.00     0.00     0.00
BUILDLEN STCK1            0.00     0.00     0.00     0.00     0.00     0.00
BUILDLEN STCK1          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK1          175.92   142.73   107.53     0.00     0.00     0.00
BUILDLEN STCK1            0.00     0.00     0.00     0.00     0.00     0.00

BUILDLEN STCK2            0.00     0.00     0.00     0.00     0.00     0.00
BUILDLEN STCK2            0.00     0.00     0.00   126.83   161.07   190.42
BUILDLEN STCK2          213.98   231.04   241.08   243.80   239.11     0.00
BUILDLEN STCK2            0.00     0.00     0.00     0.00     0.00     0.00
BUILDLEN STCK2            0.00     0.00     0.00   126.83   161.07   190.42
BUILDLEN STCK2          213.98   231.04   241.08   243.80   239.11     0.00

BUILDLEN STCK3            0.00     0.00   247.71   240.21   225.41   203.76
BUILDLEN STCK3          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK3          213.98   231.04   241.08   243.80   239.11   229.94
BUILDLEN STCK3            0.00     0.00   247.71   240.21   225.41   203.76
BUILDLEN STCK3          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK3          213.98   231.04   241.08   243.80   239.11   229.94

BUILDLEN STCK4          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK4          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK4          213.98   231.04   241.08   243.80   239.11   229.94
BUILDLEN STCK4          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK4          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK4          213.98   231.04   241.08   243.80   239.11   229.94

BUILDLEN STCK5          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK5          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK5          213.98   231.04   241.08   243.80   239.11   229.94
BUILDLEN STCK5          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK5          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK5          213.98   231.04   241.08   243.80   239.11   229.94

BUILDLEN STCK6          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK6          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK6          213.98   231.04   241.08   243.80   239.11   229.94
BUILDLEN STCK6          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK6          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK6          213.98   231.04   241.08   243.80   239.11   229.94

XBADJ    STCK1         -250.34  -259.98  -261.73  -255.52  -241.55  -220.23
XBADJ    STCK1         -192.23  -158.39  -119.73     0.00     0.00     0.00
```

XBADJ	STCK1	0.00	0.00	0.00	0.00	0.00	0.00
XBADJ	STCK1	9.69	12.30	14.02	15.31	16.14	16.47
XBADJ	STCK1	16.31	15.65	12.20	0.00	0.00	0.00
XBADJ	STCK1	0.00	0.00	0.00	0.00	0.00	0.00
XBADJ	STCK2	0.00	0.00	0.00	0.00	0.00	0.00
XBADJ	STCK2	0.00	0.00	0.00	-141.66	-176.81	-206.59
XBADJ	STCK2	-230.09	-246.60	-255.62	-256.87	-250.32	0.00
XBADJ	STCK2	0.00	0.00	0.00	0.00	0.00	0.00
XBADJ	STCK2	0.00	0.00	0.00	14.83	15.74	16.17
XBADJ	STCK2	16.11	15.56	14.54	13.07	11.21	0.00
XBADJ	STCK3	0.00	0.00	-181.48	-160.88	-135.39	-105.79
XBADJ	STCK3	-72.97	-37.94	-1.75	10.31	6.27	2.04
XBADJ	STCK3	-2.25	-6.48	-10.51	-14.22	-17.49	-20.24
XBADJ	STCK3	0.00	0.00	-66.24	-79.33	-90.02	-97.97
XBADJ	STCK3	-102.95	-104.80	-105.78	-137.14	-167.34	-192.46
XBADJ	STCK3	-211.73	-224.56	-230.57	-229.58	-221.61	-209.70
XBADJ	STCK4	-154.23	-147.27	-135.84	-120.27	-101.05	-78.77
XBADJ	STCK4	-54.08	-27.76	-0.59	2.42	-10.43	-22.97
XBADJ	STCK4	-34.81	-45.59	-54.99	-62.71	-68.53	-72.27
XBADJ	STCK4	-86.42	-100.41	-111.88	-119.94	-124.35	-124.99
XBADJ	STCK4	-121.83	-114.97	-106.94	-129.25	-150.63	-167.45
XBADJ	STCK4	-179.17	-185.45	-186.10	-181.09	-170.57	-157.67
XBADJ	STCK5	-111.37	-106.04	-97.49	-85.98	-71.86	-55.56
XBADJ	STCK5	-37.56	-18.43	1.27	-3.25	-23.46	-42.96
XBADJ	STCK5	-61.15	-77.49	-91.47	-102.67	-110.75	-115.47
XBADJ	STCK5	-129.29	-141.65	-150.22	-154.23	-153.55	-148.20
XBADJ	STCK5	-138.36	-124.31	-108.80	-123.58	-137.61	-147.46
XBADJ	STCK5	-152.83	-153.55	-149.61	-141.13	-128.35	-114.47
XBADJ	STCK6	-65.51	-62.41	-57.41	-50.67	-42.39	-32.82
XBADJ	STCK6	-22.25	-11.01	0.57	-12.05	-40.09	-66.91
XBADJ	STCK6	-91.70	-113.71	-132.25	-146.79	-156.86	-162.16
XBADJ	STCK6	-175.14	-185.28	-190.30	-189.54	-183.02	-170.94
XBADJ	STCK6	-153.67	-131.73	-108.10	-114.78	-120.98	-123.51
XBADJ	STCK6	-122.28	-117.34	-108.83	-97.01	-82.25	-67.78
YBADJ	STCK1	38.20	15.66	-7.35	-30.14	-52.01	-72.30
YBADJ	STCK1	-90.40	-105.75	-119.28	0.00	0.00	0.00
YBADJ	STCK1	0.00	0.00	0.00	0.00	0.00	0.00
YBADJ	STCK1	-38.20	-15.66	7.35	30.14	52.01	72.30
YBADJ	STCK1	90.40	105.75	119.28	0.00	0.00	0.00
YBADJ	STCK1	0.00	0.00	0.00	0.00	0.00	0.00
YBADJ	STCK2	0.00	0.00	0.00	0.00	0.00	0.00
YBADJ	STCK2	0.00	0.00	0.00	107.11	90.42	71.25
YBADJ	STCK2	49.92	27.06	3.39	-20.39	-43.55	0.00
YBADJ	STCK2	0.00	0.00	0.00	0.00	0.00	0.00

```
   YBADJ    STCK2            0.00     0.00     0.00  -107.11   -90.42   -71.25
   YBADJ    STCK2          -49.92   -27.06    -3.39    20.39    43.55     0.00

   YBADJ    STCK3            0.00     0.00   -97.25  -104.74  -109.04  -110.03
   YBADJ    STCK3         -107.68  -102.06   -94.73   -85.35   -72.72   -57.62
   YBADJ    STCK3          -40.77   -22.68    -3.91    14.99    33.43    52.02
   YBADJ    STCK3            0.00     0.00    97.25   104.74   109.04   110.03
   YBADJ    STCK3          107.68   102.06    94.73    85.35    72.72    57.62
   YBADJ    STCK3           40.77    22.68     3.91   -14.99   -33.43   -52.02

   YBADJ    STCK4          -65.83   -70.10   -72.24   -72.18   -69.93   -65.55
   YBADJ    STCK4          -59.19   -51.02   -42.70   -33.91   -23.43   -11.98
   YBADJ    STCK4           -0.17    11.65    23.11    33.88    43.61    53.18
   YBADJ    STCK4           65.83    70.10    72.24    72.18    69.93    65.55
   YBADJ    STCK4           59.19    51.02    42.70    33.91    23.43    11.98
   YBADJ    STCK4            0.17   -11.65   -23.11   -33.88   -43.61   -53.18

   YBADJ    STCK5          -60.16   -57.07   -52.25   -45.84   -38.03   -29.07
   YBADJ    STCK5          -19.23    -8.80     0.50     8.96    17.80    26.36
   YBADJ    STCK5           34.12    40.84    46.32    50.40    52.94    55.03
   YBADJ    STCK5           60.16    57.07    52.25    45.84    38.03    29.07
   YBADJ    STCK5           19.23     8.80    -0.50    -8.96   -17.80   -26.36
   YBADJ    STCK5          -34.12   -40.84   -46.32   -50.40   -52.94   -55.03

   YBADJ    STCK6          -51.37   -40.45   -28.30   -15.29    -1.82    11.71
   YBADJ    STCK6           24.89    37.30    47.19    54.82    61.44    66.45
   YBADJ    STCK6           69.44    70.32    69.06    65.71    60.36    54.33
   YBADJ    STCK6           51.37    40.45    28.30    15.29     1.81   -11.71
   YBADJ    STCK6          -24.89   -37.30   -47.19   -54.82   -61.44   -66.45
   YBADJ    STCK6          -69.44   -70.32   -69.06   -65.71   -60.36   -54.33

   URBANSRC ALL
   SRCGROUP ALL
SO FINISHED
**
**************************************
** AERMOD Receptor Pathway
**************************************
**
**
RE STARTING
   INCLUDED "19370 Redlands Avenue West 1st 14YR.rou"
RE FINISHED
**
**************************************
** AERMOD Meteorology Pathway
**************************************
**
**
ME STARTING
   SURFFILE "E:\New MET data\PERI_V9_ADJU\PERI_v9.SFC"
```

```
   PROFFILE "E:\New MET data\PERI_V9_ADJU\PERI_v9.PFL"
   SURFDATA 3171 2010
   UAIRDATA 3190 2010
   SITEDATA 99999 2010
   PROFBASE 442.0 METERS
ME FINISHED
**
**************************************
** AERMOD Output Pathway
**************************************
**
**
OU STARTING
** Auto-Generated Plotfiles
   PLOTFILE PERIOD ALL "19370 REDLANDS AVENUE WEST 1ST 14YR.AD\PE00GALL.PLT" 31
   SUMMFILE "19370 Redlands Avenue West 1st 14YR.sum"
OU FINISHED


  *** Message Summary For AERMOD Model Setup ***

  --------- Summary of Total Messages --------

 A Total of            0 Fatal Error Message(s)
 A Total of            8 Warning Message(s)
 A Total of            0 Informational Message(s)


    ******** FATAL ERROR MESSAGES ********
              ***  NONE  ***


    ********   WARNING MESSAGES   ********
 SO W320     290        PPARM: Input Parameter May Be Out-of-Range for Parameter           VS
 SO W320     291        PPARM: Input Parameter May Be Out-of-Range for Parameter           VS
 SO W320     292        PPARM: Input Parameter May Be Out-of-Range for Parameter           VS
 SO W320     293        PPARM: Input Parameter May Be Out-of-Range for Parameter           VS
 SO W320     294        PPARM: Input Parameter May Be Out-of-Range for Parameter           VS
 SO W320     295        PPARM: Input Parameter May Be Out-of-Range for Parameter           VS
 ME W186     719       MEOPEN: THRESH_1MIN 1-min ASOS wind speed threshold used         0.50
 ME W187     719       MEOPEN: ADJ_U* Option for Stable Low Winds used in AERMET

 *********************************
 *** SETUP Finishes Successfully ***
 *********************************


 *** AERMOD - VERSION 22112  ***   *** 19370 Redlands Avenue West  - new site plan                    ***        04/04/23
 *** AERMET - VERSION  16216 ***   *** DPM Conc 2026-39  1st 14YR                                    ***        19:12:16
                                                                                                                PAGE   1
 *** MODELOPTs:    RegDFAULT  CONC  ELEV  URBAN  ADJ_U*
```

```
                                        ***     MODEL SETUP OPTIONS SUMMARY       ***
- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - -

** Model Options Selected:
     * Model Uses Regulatory DEFAULT Options
     * Model Is Setup For Calculation of Average CONCentration Values.
     * NO GAS DEPOSITION Data Provided.
     * NO PARTICLE DEPOSITION Data Provided.
     * Model Uses NO DRY DEPLETION. DDPLETE  =  F
     * Model Uses NO WET DEPLETION. WETDPLT  =  F
     * Stack-tip Downwash.
     * Model Accounts for ELEVated Terrain Effects.
     * Use Calms Processing Routine.
     * Use Missing Data Processing Routine.
     * No Exponential Decay.
     * Model Uses URBAN Dispersion Algorithm for the SBL for   179 Source(s),
       for Total of    1 Urban Area(s):
  Urban Population =   2189641.0 ;  Urban Roughness Length =  1.000 m
     * Urban Roughness Length of 1.0 Meter Used.
     * ADJ_U*   - Use ADJ_U* option for SBL in AERMET
     * CCVR_Sub - Meteorological data includes CCVR substitutions
     * TEMP_Sub - Meteorological data includes TEMP substitutions
     * Model Assumes No FLAGPOLE Receptor Heights.
     * The User Specified a Pollutant Type of: DPM

**Model Calculates PERIOD Averages Only

**This Run Includes:    179 Source(s);       1 Source Group(s); and     449 Receptor(s)

               with:      6 POINT(s), including
                          0 POINTCAP(s) and      0 POINTHOR(s)
                and:    172 VOLUME source(s)
                and:      1 AREA type source(s)
                and:      0 LINE source(s)
                and:      0 RLINE/RLINEXT source(s)
                and:      0 OPENPIT source(s)
                and:      0 BUOYANT LINE source(s) with a total of     0 line(s)
                and:      0 SWPOINT source(s)


**Model Set To Continue RUNning After the Setup Testing.

**The AERMET Input Meteorological Data Version Date:  16216

**Output Options Selected:
         Model Outputs Tables of PERIOD Averages by Receptor
         Model Outputs External File(s) of High Values for Plotting (PLOTFILE Keyword)
         Model Outputs Separate Summary File of High Ranked Values (SUMMFILE Keyword)

**NOTE:  The Following Flags May Appear Following CONC Values:  c for Calm Hours
```

m for Missing Hours
b for Both Calm and Missing Hours

**Misc. Inputs: Base Elev. for Pot. Temp. Profile (m MSL) = 442.00 ; Decay Coef. = 0.000 ; Rot. Angle = 0.0
Emission Units = GRAMS/SEC ; Emission Rate Unit Factor = 0.10000E+07
Output Units = MICROGRAMS/M**3

**Approximate Storage Requirements of Model = 3.9 MB of RAM.

**Input Runstream File: aermod.inp
**Output Print File: aermod.out

**Detailed Error/Message File: 19370 Redlands Avenue West 1st 14YR.err
**File for Summary of Results: 19370 Redlands Avenue West 1st 14YR.sum

*** AERMOD - VERSION 22112 *** *** 19370 Redlands Avenue West - new site plan *** 04/04/23
*** AERMET - VERSION 16216 *** *** DPM Conc 2026-39 1st 14YR *** 19:12:16
PAGE 2
*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** POINT SOURCE DATA ***

SOURCE ID	NUMBER PART. CATS.	EMISSION RATE (GRAMS/SEC)	X (METERS)	Y (METERS)	BASE ELEV. (METERS)	STACK HEIGHT (METERS)	STACK TEMP. (DEG.K)	STACK EXIT VEL. (M/SEC)	STACK DIAMETER (METERS)	BLDG EXISTS	URBAN SOURCE	CAP/ HOR	EMIS RATE SCALAR VARY BY
STCK1	0	0.10900E-04	479650.5	3743097.5	441.2	3.50	366.00	51.82	0.10	YES	YES	NO	
STCK2	0	0.10900E-04	479648.8	3742857.1	441.1	3.50	366.00	51.82	0.10	YES	YES	NO	
STCK3	0	0.10900E-04	479532.5	3743073.0	441.9	3.50	366.00	51.82	0.10	YES	YES	NO	
STCK4	0	0.10900E-04	479531.4	3743021.0	441.8	3.50	366.00	51.82	0.10	YES	YES	NO	
STCK5	0	0.10900E-04	479529.5	3742977.7	441.7	3.50	366.00	51.82	0.10	YES	YES	NO	
STCK6	0	0.10900E-04	479530.2	3742931.1	441.7	3.50	366.00	51.82	0.10	YES	YES	NO	

*** AERMOD - VERSION 22112 *** *** 19370 Redlands Avenue West - new site plan *** 04/04/23
*** AERMET - VERSION 16216 *** *** DPM Conc 2026-39 1st 14YR *** 19:12:16
PAGE 3
*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** VOLUME SOURCE DATA ***

SOURCE ID	NUMBER PART. CATS.	EMISSION RATE (GRAMS/SEC)	X (METERS)	Y (METERS)	BASE ELEV. (METERS)	RELEASE HEIGHT (METERS)	INIT. SY (METERS)	INIT. SZ (METERS)	URBAN SOURCE	EMISSION RATE SCALAR VARY BY
L0000411	0	0.15090E-06	479655.4	3742857.0	441.1	3.50	4.00	5.10	YES	
L0000412	0	0.15090E-06	479646.8	3742856.1	441.1	3.50	4.00	5.10	YES	
L0000413	0	0.15090E-06	479638.3	3742855.3	441.1	3.50	4.00	5.10	YES	

L0000414	0	0.15090E-06	479629.7	3742854.8	441.1	3.50	4.00	5.10	YES
L0000415	0	0.15090E-06	479621.1	3742854.9	441.1	3.50	4.00	5.10	YES
L0000416	0	0.15090E-06	479612.5	3742855.0	441.1	3.50	4.00	5.10	YES
L0000417	0	0.15090E-06	479603.9	3742855.1	441.2	3.50	4.00	5.10	YES
L0000418	0	0.15090E-06	479595.4	3742855.2	441.3	3.50	4.00	5.10	YES
L0000419	0	0.15090E-06	479586.8	3742855.3	441.4	3.50	4.00	5.10	YES
L0000420	0	0.15090E-06	479578.2	3742855.4	441.6	3.50	4.00	5.10	YES
L0000421	0	0.15090E-06	479569.6	3742855.5	441.7	3.50	4.00	5.10	YES
L0000422	0	0.15090E-06	479561.0	3742855.6	441.7	3.50	4.00	5.10	YES
L0000423	0	0.15090E-06	479552.4	3742855.7	441.8	3.50	4.00	5.10	YES
L0000424	0	0.15090E-06	479543.8	3742855.8	441.8	3.50	4.00	5.10	YES
L0000425	0	0.15090E-06	479535.2	3742855.9	441.8	3.50	4.00	5.10	YES
L0000426	0	0.15090E-06	479526.7	3742856.6	441.8	3.50	4.00	5.10	YES
L0000427	0	0.15090E-06	479519.7	3742859.9	441.8	3.50	4.00	5.10	YES
L0000428	0	0.15090E-06	479516.1	3742867.7	441.8	3.50	4.00	5.10	YES
L0000429	0	0.15090E-06	479512.5	3742875.5	441.9	3.50	4.00	5.10	YES
L0000430	0	0.15090E-06	479508.9	3742883.3	441.9	3.50	4.00	5.10	YES
L0000431	0	0.15090E-06	479505.4	3742891.1	441.8	3.50	4.00	5.10	YES
L0000432	0	0.15090E-06	479501.8	3742898.9	441.8	3.50	4.00	5.10	YES
L0000433	0	0.15090E-06	479498.2	3742906.7	441.8	3.50	4.00	5.10	YES
L0000434	0	0.15090E-06	479494.6	3742914.5	441.8	3.50	4.00	5.10	YES
L0000435	0	0.15090E-06	479491.0	3742922.3	441.8	3.50	4.00	5.10	YES
L0000436	0	0.15090E-06	479487.4	3742930.1	441.9	3.50	4.00	5.10	YES
L0000437	0	0.15090E-06	479483.8	3742937.9	441.9	3.50	4.00	5.10	YES
L0000438	0	0.15090E-06	479480.2	3742945.7	442.0	3.50	4.00	5.10	YES
L0000439	0	0.15090E-06	479476.6	3742953.5	442.0	3.50	4.00	5.10	YES
L0000440	0	0.15090E-06	479473.0	3742961.3	442.0	3.50	4.00	5.10	YES
L0000441	0	0.15090E-06	479470.0	3742969.4	441.9	3.50	4.00	5.10	YES
L0000442	0	0.15090E-06	479467.0	3742977.4	441.9	3.50	4.00	5.10	YES
L0000443	0	0.15090E-06	479464.1	3742985.5	442.0	3.50	4.00	5.10	YES
L0000444	0	0.15090E-06	479461.1	3742993.5	442.0	3.50	4.00	5.10	YES
L0000445	0	0.15090E-06	479458.9	3743001.7	442.0	3.50	4.00	5.10	YES
L0000446	0	0.15090E-06	479459.4	3743010.3	442.1	3.50	4.00	5.10	YES
L0000447	0	0.15090E-06	479459.9	3743018.9	442.1	3.50	4.00	5.10	YES
L0000448	0	0.15090E-06	479460.4	3743027.5	442.2	3.50	4.00	5.10	YES
L0000449	0	0.15090E-06	479460.9	3743036.0	442.2	3.50	4.00	5.10	YES
L0000450	0	0.15090E-06	479462.4	3743044.4	442.1	3.50	4.00	5.10	YES

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** VOLUME SOURCE DATA ***

SOURCE ID	NUMBER PART. CATS.	EMISSION RATE (GRAMS/SEC)	X (METERS)	Y (METERS)	BASE ELEV. (METERS)	RELEASE HEIGHT (METERS)	INIT. SY (METERS)	INIT. SZ (METERS)	URBAN SOURCE	EMISSION RATE SCALAR VARY BY

L0000451	0	0.15090E-06	479464.7	3743052.7	442.1	3.50	4.00	5.10	YES
L0000452	0	0.15090E-06	479467.0	3743061.0	442.0	3.50	4.00	5.10	YES
L0000453	0	0.15090E-06	479469.4	3743069.3	441.9	3.50	4.00	5.10	YES
L0000454	0	0.15090E-06	479474.3	3743075.5	441.9	3.50	4.00	5.10	YES
L0000455	0	0.15090E-06	479481.7	3743079.7	441.9	3.50	4.00	5.10	YES
L0000456	0	0.15090E-06	479489.2	3743084.0	441.9	3.50	4.00	5.10	YES
L0000457	0	0.15090E-06	479496.7	3743088.2	441.8	3.50	4.00	5.10	YES
L0000458	0	0.15090E-06	479504.2	3743092.4	441.7	3.50	4.00	5.10	YES
L0000459	0	0.15090E-06	479512.1	3743095.3	441.7	3.50	4.00	5.10	YES
L0000460	0	0.15090E-06	479520.6	3743096.6	441.6	3.50	4.00	5.10	YES
L0000461	0	0.15090E-06	479529.1	3743097.9	441.6	3.50	4.00	5.10	YES
L0000462	0	0.15090E-06	479537.6	3743099.3	441.5	3.50	4.00	5.10	YES
L0000463	0	0.15090E-06	479546.1	3743100.6	441.4	3.50	4.00	5.10	YES
L0000464	0	0.15090E-06	479554.6	3743100.9	441.4	3.50	4.00	5.10	YES
L0000465	0	0.15090E-06	479563.2	3743100.8	441.4	3.50	4.00	5.10	YES
L0000466	0	0.15090E-06	479571.8	3743100.7	441.3	3.50	4.00	5.10	YES
L0000467	0	0.15090E-06	479580.4	3743100.6	441.3	3.50	4.00	5.10	YES
L0000468	0	0.15090E-06	479589.0	3743100.5	441.3	3.50	4.00	5.10	YES
L0000469	0	0.15090E-06	479597.6	3743100.4	441.2	3.50	4.00	5.10	YES
L0000470	0	0.15090E-06	479606.2	3743100.3	441.2	3.50	4.00	5.10	YES
L0000471	0	0.15090E-06	479614.8	3743100.1	441.2	3.50	4.00	5.10	YES
L0000472	0	0.15090E-06	479623.3	3743100.0	441.2	3.50	4.00	5.10	YES
L0000473	0	0.15090E-06	479631.9	3743099.9	441.2	3.50	4.00	5.10	YES
L0000474	0	0.15090E-06	479640.5	3743099.8	441.2	3.50	4.00	5.10	YES
L0000475	0	0.15090E-06	479649.1	3743099.7	441.2	3.50	4.00	5.10	YES
L0000476	0	0.15090E-06	479657.7	3743099.6	441.2	3.50	4.00	5.10	YES
L0000477	0	0.38930E-07	479669.0	3742861.9	441.1	3.50	4.00	1.63	YES
L0000478	0	0.38930E-07	479669.8	3742870.4	441.1	3.50	4.00	1.63	YES
L0000479	0	0.38930E-07	479670.3	3742879.0	441.1	3.50	4.00	1.63	YES
L0000480	0	0.38930E-07	479670.3	3742887.6	441.1	3.50	4.00	1.63	YES
L0000481	0	0.38930E-07	479670.3	3742896.2	441.1	3.50	4.00	1.63	YES
L0000482	0	0.38930E-07	479670.3	3742904.8	441.1	3.50	4.00	1.63	YES
L0000483	0	0.38930E-07	479670.3	3742913.4	441.1	3.50	4.00	1.63	YES
L0000484	0	0.38930E-07	479670.3	3742921.9	441.1	3.50	4.00	1.63	YES
L0000485	0	0.38930E-07	479670.3	3742930.5	441.1	3.50	4.00	1.63	YES
L0000486	0	0.38930E-07	479670.3	3742939.1	441.0	3.50	4.00	1.63	YES
L0000487	0	0.38930E-07	479670.3	3742947.7	441.0	3.50	4.00	1.63	YES
L0000488	0	0.38930E-07	479670.3	3742956.3	441.0	3.50	4.00	1.63	YES
L0000489	0	0.38930E-07	479670.3	3742964.9	441.0	3.50	4.00	1.63	YES
L0000490	0	0.38930E-07	479670.3	3742973.5	441.0	3.50	4.00	1.63	YES

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** VOLUME SOURCE DATA ***

SOURCE	NUMBER PART.	EMISSION RATE (GRAMS/SEC)	X	Y	BASE ELEV.	RELEASE HEIGHT	INIT. SY	INIT. SZ	URBAN SOURCE	EMISSION RATE SCALAR VARY

ID	CATS.		(METERS)	(METERS)	(METERS)	(METERS)	(METERS)	(METERS)	BY
L0000491	0	0.38930E-07	479670.3	3742982.1	441.1	3.50	4.00	1.63	YES
L0000492	0	0.38930E-07	479670.3	3742990.7	441.1	3.50	4.00	1.63	YES
L0000493	0	0.38930E-07	479670.3	3742999.3	441.1	3.50	4.00	1.63	YES
L0000494	0	0.38930E-07	479670.3	3743007.9	441.2	3.50	4.00	1.63	YES
L0000495	0	0.38930E-07	479670.3	3743016.4	441.2	3.50	4.00	1.63	YES
L0000496	0	0.38930E-07	479670.3	3743025.0	441.2	3.50	4.00	1.63	YES
L0000497	0	0.38930E-07	479670.3	3743033.6	441.3	3.50	4.00	1.63	YES
L0000498	0	0.38930E-07	479670.3	3743042.2	441.3	3.50	4.00	1.63	YES
L0000499	0	0.38930E-07	479670.3	3743050.8	441.3	3.50	4.00	1.63	YES
L0000500	0	0.38930E-07	479670.3	3743059.4	441.4	3.50	4.00	1.63	YES
L0000501	0	0.38930E-07	479670.3	3743068.0	441.4	3.50	4.00	1.63	YES
L0000502	0	0.38930E-07	479670.3	3743076.6	441.3	3.50	4.00	1.63	YES
L0000503	0	0.38930E-07	479670.3	3743085.2	441.3	3.50	4.00	1.63	YES
L0000504	0	0.38930E-07	479670.3	3743093.8	441.2	3.50	4.00	1.63	YES
L0000505	0	0.77690E-07	479670.0	3743107.7	440.9	3.50	4.00	1.63	YES
L0000506	0	0.77690E-07	479669.8	3743116.3	440.6	3.50	4.00	1.63	YES
L0000507	0	0.77690E-07	479669.6	3743124.9	440.3	3.50	4.00	1.63	YES
L0000508	0	0.77690E-07	479669.4	3743133.5	440.3	3.50	4.00	1.63	YES
L0000509	0	0.77690E-07	479669.2	3743142.1	440.5	3.50	4.00	1.63	YES
L0000510	0	0.77690E-07	479669.0	3743150.7	440.8	3.50	4.00	1.63	YES
L0000511	0	0.77690E-07	479668.8	3743159.3	441.0	3.50	4.00	1.63	YES
L0000512	0	0.77690E-07	479668.6	3743167.8	441.0	3.50	4.00	1.63	YES
L0000513	0	0.77690E-07	479668.3	3743176.4	441.0	3.50	4.00	1.63	YES
L0000514	0	0.77690E-07	479668.1	3743185.0	441.0	3.50	4.00	1.63	YES
L0000515	0	0.77690E-07	479667.9	3743193.6	441.1	3.50	4.00	1.63	YES
L0000516	0	0.77690E-07	479667.7	3743202.2	441.2	3.50	4.00	1.63	YES
L0000517	0	0.77690E-07	479667.5	3743210.8	441.2	3.50	4.00	1.63	YES
L0000518	0	0.77690E-07	479667.3	3743219.4	441.3	3.50	4.00	1.63	YES
L0000519	0	0.77690E-07	479667.1	3743228.0	441.3	3.50	4.00	1.63	YES
L0000520	0	0.77690E-07	479666.9	3743236.5	441.3	3.50	4.00	1.63	YES
L0000521	0	0.77690E-07	479666.7	3743245.1	441.3	3.50	4.00	1.63	YES
L0000522	0	0.77690E-07	479666.5	3743253.7	441.3	3.50	4.00	1.63	YES
L0000523	0	0.77690E-07	479666.4	3743262.3	441.2	3.50	4.00	1.63	YES
L0000524	0	0.77690E-07	479666.3	3743270.9	441.2	3.50	4.00	1.63	YES
L0000525	0	0.77690E-07	479666.2	3743279.5	441.1	3.50	4.00	1.63	YES
L0000526	0	0.77690E-07	479666.1	3743288.1	441.0	3.50	4.00	1.63	YES
L0000527	0	0.77690E-07	479666.0	3743296.7	440.8	3.50	4.00	1.63	YES
L0000528	0	0.77690E-07	479665.9	3743305.3	440.7	3.50	4.00	1.63	YES
L0000529	0	0.77690E-07	479665.8	3743313.9	440.6	3.50	4.00	1.63	YES
L0000530	0	0.77690E-07	479665.7	3743322.4	440.6	3.50	4.00	1.63	YES

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** VOLUME SOURCE DATA ***

SOURCE ID	NUMBER PART. CATS.	EMISSION RATE (GRAMS/SEC)	X (METERS)	Y (METERS)	BASE ELEV. (METERS)	RELEASE HEIGHT (METERS)	INIT. SY (METERS)	INIT. SZ (METERS)	URBAN SOURCE	EMISSION RATE SCALAR VARY BY
L0000531	0	0.77690E-07	479665.6	3743331.0	440.7	3.50	4.00	1.63	YES	
L0000532	0	0.77690E-07	479666.0	3743339.6	440.7	3.50	4.00	1.63	YES	
L0000533	0	0.77690E-07	479666.3	3743348.2	440.7	3.50	4.00	1.63	YES	
L0000534	0	0.77690E-07	479666.6	3743356.8	440.7	3.50	4.00	1.63	YES	
L0000535	0	0.77690E-07	479666.9	3743365.4	440.6	3.50	4.00	1.63	YES	
L0000536	0	0.77690E-07	479667.2	3743374.0	440.6	3.50	4.00	1.63	YES	
L0000537	0	0.77690E-07	479667.5	3743382.5	440.4	3.50	4.00	1.63	YES	
L0000538	0	0.77690E-07	479668.7	3743391.0	440.2	3.50	4.00	1.63	YES	
L0000539	0	0.77690E-07	479670.3	3743399.5	440.0	3.50	4.00	1.63	YES	
L0000540	0	0.77690E-07	479671.8	3743407.9	439.8	3.50	4.00	1.63	YES	
L0000541	0	0.77690E-07	479673.3	3743416.4	439.7	3.50	4.00	1.63	YES	
L0000542	0	0.77690E-07	479675.4	3743424.7	439.6	3.50	4.00	1.63	YES	
L0000543	0	0.77690E-07	479677.6	3743433.0	439.5	3.50	4.00	1.63	YES	
L0000544	0	0.77690E-07	479679.8	3743441.3	439.6	3.50	4.00	1.63	YES	
L0000545	0	0.77690E-07	479682.0	3743449.6	439.8	3.50	4.00	1.63	YES	
L0000546	0	0.77690E-07	479684.2	3743457.9	440.1	3.50	4.00	1.63	YES	
L0000547	0	0.77690E-07	479686.4	3743466.2	440.3	3.50	4.00	1.63	YES	
L0000548	0	0.77690E-07	479688.0	3743474.7	440.4	3.50	4.00	1.63	YES	
L0000549	0	0.77690E-07	479689.5	3743483.1	440.4	3.50	4.00	1.63	YES	
L0000550	0	0.77690E-07	479691.0	3743491.6	440.5	3.50	4.00	1.63	YES	
L0000551	0	0.77690E-07	479692.4	3743500.1	440.5	3.50	4.00	1.63	YES	
L0000552	0	0.77690E-07	479693.8	3743508.5	440.5	3.50	4.00	1.63	YES	
L0000553	0	0.77690E-07	479694.8	3743517.1	440.5	3.50	4.00	1.63	YES	
L0000554	0	0.77690E-07	479695.8	3743525.6	440.4	3.50	4.00	1.63	YES	
L0000555	0	0.77690E-07	479696.7	3743534.2	440.4	3.50	4.00	1.63	YES	
L0000556	0	0.77690E-07	479697.7	3743542.7	440.3	3.50	4.00	1.63	YES	
L0000557	0	0.77690E-07	479698.7	3743551.2	440.2	3.50	4.00	1.63	YES	
L0000558	0	0.77690E-07	479699.0	3743559.8	440.2	3.50	4.00	1.63	YES	
L0000559	0	0.77690E-07	479699.3	3743568.4	440.1	3.50	4.00	1.63	YES	
L0000560	0	0.77690E-07	479699.6	3743577.0	440.1	3.50	4.00	1.63	YES	
L0000561	0	0.77690E-07	479699.9	3743585.6	440.1	3.50	4.00	1.63	YES	
L0000562	0	0.77690E-07	479700.2	3743594.2	440.0	3.50	4.00	1.63	YES	
L0000563	0	0.77690E-07	479700.5	3743602.7	439.8	3.50	4.00	1.63	YES	
L0000564	0	0.77690E-07	479700.7	3743611.3	439.7	3.50	4.00	1.63	YES	
L0000565	0	0.77690E-07	479700.6	3743619.9	439.5	3.50	4.00	1.63	YES	
L0000566	0	0.77690E-07	479700.6	3743628.5	439.4	3.50	4.00	1.63	YES	
L0000567	0	0.77690E-07	479700.5	3743637.1	439.4	3.50	4.00	1.63	YES	
L0000568	0	0.77690E-07	479700.5	3743645.7	439.4	3.50	4.00	1.63	YES	
L0000569	0	0.77690E-07	479700.4	3743654.3	439.5	3.50	4.00	1.63	YES	
L0000570	0	0.77690E-07	479700.4	3743662.9	439.9	3.50	4.00	1.63	YES	

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** VOLUME SOURCE DATA ***

SOURCE ID	NUMBER PART. CATS.	EMISSION RATE (GRAMS/SEC)	X (METERS)	Y (METERS)	BASE ELEV. (METERS)	RELEASE HEIGHT (METERS)	INIT. SY (METERS)	INIT. SZ (METERS)	URBAN SOURCE	EMISSION RATE SCALAR VARY BY
L0000571	0	0.77690E-07	479700.3	3743671.5	440.2	3.50	4.00	1.63	YES	
L0000572	0	0.77690E-07	479700.3	3743680.0	440.6	3.50	4.00	1.63	YES	
L0000573	0	0.77690E-07	479700.2	3743688.6	440.7	3.50	4.00	1.63	YES	
L0000574	0	0.77690E-07	479700.1	3743697.2	440.7	3.50	4.00	1.63	YES	
L0000575	0	0.77690E-07	479700.1	3743705.8	440.7	3.50	4.00	1.63	YES	
L0000576	0	0.77690E-07	479700.0	3743714.4	440.7	3.50	4.00	1.63	YES	
L0000577	0	0.77690E-07	479700.0	3743723.0	440.6	3.50	4.00	1.63	YES	
L0000578	0	0.77690E-07	479699.9	3743731.6	440.4	3.50	4.00	1.63	YES	
L0000579	0	0.77690E-07	479699.9	3743740.2	440.3	3.50	4.00	1.63	YES	
L0000580	0	0.77690E-07	479699.8	3743748.8	440.3	3.50	4.00	1.63	YES	
L0000581	0	0.77690E-07	479699.8	3743757.4	440.4	3.50	4.00	1.63	YES	
L0000582	0	0.77690E-07	479699.7	3743766.0	440.6	3.50	4.00	1.63	YES	

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** AREAPOLY SOURCE DATA ***

SOURCE ID	NUMBER PART. CATS.	EMISSION RATE (GRAMS/SEC /METER**2)	LOCATION OF AREA X (METERS)	Y (METERS)	BASE ELEV. (METERS)	RELEASE HEIGHT (METERS)	NUMBER OF VERTS.	INIT. SZ (METERS)	URBAN SOURCE	EMISSION RATE SCALAR VARY BY
PAREA1	0	0.11741E-08	479547.3	3743092.8	441.6	0.91	14	0.00	YES	

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** SOURCE IDs DEFINING SOURCE GROUPS ***

SRCGROUP ID	SOURCE IDs
ALL	STCK1 , STCK2 , STCK3 , STCK4 , STCK5 , STCK6 , L0000411 , L0000412 ,

```
           L0000413    , L0000414    , L0000415    , L0000416    , L0000417    , L0000418    , L0000419    , L0000420    ,
           L0000421    , L0000422    , L0000423    , L0000424    , L0000425    , L0000426    , L0000427    , L0000428    ,
           L0000429    , L0000430    , L0000431    , L0000432    , L0000433    , L0000434    , L0000435    , L0000436    ,
           L0000437    , L0000438    , L0000439    , L0000440    , L0000441    , L0000442    , L0000443    , L0000444    ,
           L0000445    , L0000446    , L0000447    , L0000448    , L0000449    , L0000450    , L0000451    , L0000452    ,
           L0000453    , L0000454    , L0000455    , L0000456    , L0000457    , L0000458    , L0000459    , L0000460    ,
           L0000461    , L0000462    , L0000463    , L0000464    , L0000465    , L0000466    , L0000467    , L0000468    ,
           L0000469    , L0000470    , L0000471    , L0000472    , L0000473    , L0000474    , L0000475    , L0000476    ,
           L0000477    , L0000478    , L0000479    , L0000480    , L0000481    , L0000482    , L0000483    , L0000484    ,
           L0000485    , L0000486    , L0000487    , L0000488    , L0000489    , L0000490    , L0000491    , L0000492    ,
           L0000493    , L0000494    , L0000495    , L0000496    , L0000497    , L0000498    , L0000499    , L0000500    ,
           L0000501    , L0000502    , L0000503    , L0000504    , L0000505    , L0000506    , L0000507    , L0000508    ,
           L0000509    , L0000510    , L0000511    , L0000512    , L0000513    , L0000514    , L0000515    , L0000516    ,
           L0000517    , L0000518    , L0000519    , L0000520    , L0000521    , L0000522    , L0000523    , L0000524    ,
           L0000525    , L0000526    , L0000527    , L0000528    , L0000529    , L0000530    , L0000531    , L0000532    ,
           L0000533    , L0000534    , L0000535    , L0000536    , L0000537    , L0000538    , L0000539    , L0000540    ,
           L0000541    , L0000542    , L0000543    , L0000544    , L0000545    , L0000546    , L0000547    , L0000548    ,
           L0000549    , L0000550    , L0000551    , L0000552    , L0000553    , L0000554    , L0000555    , L0000556    ,
           L0000557    , L0000558    , L0000559    , L0000560    , L0000561    , L0000562    , L0000563    , L0000564    ,
```


*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** SOURCE IDs DEFINING SOURCE GROUPS ***

SRCGROUP ID	SOURCE IDs
	L0000565 , L0000566 , L0000567 , L0000568 , L0000569 , L0000570 , L0000571 , L0000572 ,

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** SOURCE IDs DEFINED AS URBAN SOURCES ***

URBAN ID	URBAN POP	SOURCE IDs
	2189641.	STCK1 , STCK2 , STCK3 , STCK4 , STCK5 , STCK6 , L0000411 , L0000412 ,
		L0000413 , L0000414 , L0000415 , L0000416 , L0000417 , L0000418 , L0000419 , L0000420 ,
		L0000421 , L0000422 , L0000423 , L0000424 , L0000425 , L0000426 , L0000427 , L0000428 ,
		L0000429 , L0000430 , L0000431 , L0000432 , L0000433 , L0000434 , L0000435 , L0000436 ,
		L0000437 , L0000438 , L0000439 , L0000440 , L0000441 , L0000442 , L0000443 , L0000444 ,
		L0000445 , L0000446 , L0000447 , L0000448 , L0000449 , L0000450 , L0000451 , L0000452 ,
		L0000453 , L0000454 , L0000455 , L0000456 , L0000457 , L0000458 , L0000459 , L0000460 ,
		L0000461 , L0000462 , L0000463 , L0000464 , L0000465 , L0000466 , L0000467 , L0000468 ,
		L0000469 , L0000470 , L0000471 , L0000472 , L0000473 , L0000474 , L0000475 , L0000476 ,
		L0000477 , L0000478 , L0000479 , L0000480 , L0000481 , L0000482 , L0000483 , L0000484 ,
		L0000485 , L0000486 , L0000487 , L0000488 , L0000489 , L0000490 , L0000491 , L0000492 ,
		L0000493 , L0000494 , L0000495 , L0000496 , L0000497 , L0000498 , L0000499 , L0000500 ,
		L0000501 , L0000502 , L0000503 , L0000504 , L0000505 , L0000506 , L0000507 , L0000508 ,
		L0000509 , L0000510 , L0000511 , L0000512 , L0000513 , L0000514 , L0000515 , L0000516 ,
		L0000517 , L0000518 , L0000519 , L0000520 , L0000521 , L0000522 , L0000523 , L0000524 ,
		L0000525 , L0000526 , L0000527 , L0000528 , L0000529 , L0000530 , L0000531 , L0000532 ,
		L0000533 , L0000534 , L0000535 , L0000536 , L0000537 , L0000538 , L0000539 , L0000540 ,

L0000541 , L0000542 , L0000543 , L0000544 , L0000545 , L0000546 , L0000547 , L0000548 ,

L0000549 , L0000550 , L0000551 , L0000552 , L0000553 , L0000554 , L0000555 , L0000556 ,

L0000557 , L0000558 , L0000559 , L0000560 , L0000561 , L0000562 , L0000563 , L0000564 ,

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** SOURCE IDs DEFINED AS URBAN SOURCES ***

URBAN ID	URBAN POP	SOURCE IDs

L0000565 , L0000566 , L0000567 , L0000568 , L0000569 , L0000570 , L0000571 , L0000572 ,

L0000573 , L0000574 , L0000575 , L0000576 , L0000577 , L0000578 , L0000579 , L0000580 ,

L0000581 , L0000582 , PAREA1 ,

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** DIRECTION SPECIFIC BUILDING DIMENSIONS ***

SOURCE ID: STCK1

IFV	BH	BW	BL	XADJ	YADJ	IFV	BH	BW	BL	XADJ	YADJ
1	11.0,	126.8,	240.7,	-250.3,	38.2,	2	11.0,	161.1,	247.7,	-260.0,	15.7,
3	11.0,	190.4,	247.7,	-261.7,	-7.3,	4	11.0,	214.0,	240.2,	-255.5,	-30.1,
5	11.0,	231.0,	225.4,	-241.6,	-52.0,	6	11.0,	241.1,	203.8,	-220.2,	-72.3,
7	11.0,	243.8,	175.9,	-192.2,	-90.4,	8	11.0,	239.1,	142.7,	-158.4,	-105.8,
9	11.0,	229.9,	107.5,	-119.7,	-119.3,	10	0.0,	0.0,	0.0,	0.0,	0.0,
11	0.0,	0.0,	0.0,	0.0,	0.0,	12	0.0,	0.0,	0.0,	0.0,	0.0,
13	0.0,	0.0,	0.0,	0.0,	0.0,	14	0.0,	0.0,	0.0,	0.0,	0.0,
15	0.0,	0.0,	0.0,	0.0,	0.0,	16	0.0,	0.0,	0.0,	0.0,	0.0,
17	0.0,	0.0,	0.0,	0.0,	0.0,	18	0.0,	0.0,	0.0,	0.0,	0.0,
19	11.0,	126.8,	240.7,	9.7,	-38.2,	20	11.0,	161.1,	247.7,	12.3,	-15.7,
21	11.0,	190.4,	247.7,	14.0,	7.3,	22	11.0,	214.0,	240.2,	15.3,	30.1,
23	11.0,	231.0,	225.4,	16.1,	52.0,	24	11.0,	241.1,	203.8,	16.5,	72.3,
25	11.0,	243.8,	175.9,	16.3,	90.4,	26	11.0,	239.1,	142.7,	15.7,	105.8,
27	11.0,	229.9,	107.5,	12.2,	119.3,	28	0.0,	0.0,	0.0,	0.0,	0.0,
29	0.0,	0.0,	0.0,	0.0,	0.0,	30	0.0,	0.0,	0.0,	0.0,	0.0,
31	0.0,	0.0,	0.0,	0.0,	0.0,	32	0.0,	0.0,	0.0,	0.0,	0.0,

33	0.0,	0.0,	0.0,	0.0,	0.0,	34	0.0,	0.0,	0.0,	0.0,	0.0,
35	0.0,	0.0,	0.0,	0.0,	0.0,	36	0.0,	0.0,	0.0,	0.0,	0.0,

SOURCE ID: STCK2

IFV	BH	BW	BL	XADJ	YADJ	IFV	BH	BW	BL	XADJ	YADJ
1	0.0,	0.0,	0.0,	0.0,	0.0,	2	0.0,	0.0,	0.0,	0.0,	0.0,
3	0.0,	0.0,	0.0,	0.0,	0.0,	4	0.0,	0.0,	0.0,	0.0,	0.0,
5	0.0,	0.0,	0.0,	0.0,	0.0,	6	0.0,	0.0,	0.0,	0.0,	0.0,
7	0.0,	0.0,	0.0,	0.0,	0.0,	8	0.0,	0.0,	0.0,	0.0,	0.0,
9	0.0,	0.0,	0.0,	0.0,	0.0,	10	11.0,	240.7,	126.8,	-141.7,	107.1,
11	11.0,	247.7,	161.1,	-176.8,	90.4,	12	11.0,	247.7,	190.4,	-206.6,	71.2,
13	11.0,	240.2,	214.0,	-230.1,	49.9,	14	11.0,	225.4,	231.0,	-246.6,	27.1,
15	11.0,	203.8,	241.1,	-255.6,	3.4,	16	11.0,	175.9,	243.8,	-256.9,	-20.4,
17	11.0,	142.7,	239.1,	-250.3,	-43.5,	18	0.0,	0.0,	0.0,	0.0,	0.0,
19	0.0,	0.0,	0.0,	0.0,	0.0,	20	0.0,	0.0,	0.0,	0.0,	0.0,
21	0.0,	0.0,	0.0,	0.0,	0.0,	22	0.0,	0.0,	0.0,	0.0,	0.0,
23	0.0,	0.0,	0.0,	0.0,	0.0,	24	0.0,	0.0,	0.0,	0.0,	0.0,
25	0.0,	0.0,	0.0,	0.0,	0.0,	26	0.0,	0.0,	0.0,	0.0,	0.0,
27	0.0,	0.0,	0.0,	0.0,	0.0,	28	11.0,	240.7,	126.8,	14.8,	-107.1,
29	11.0,	247.7,	161.1,	15.7,	-90.4,	30	11.0,	247.7,	190.4,	16.2,	-71.2,
31	11.0,	240.2,	214.0,	16.1,	-49.9,	32	11.0,	225.4,	231.0,	15.6,	-27.1,
33	11.0,	203.8,	241.1,	14.5,	-3.4,	34	11.0,	175.9,	243.8,	13.1,	20.4,
35	11.0,	142.7,	239.1,	11.2,	43.5,	36	0.0,	0.0,	0.0,	0.0,	0.0,

SOURCE ID: STCK3

IFV	BH	BW	BL	XADJ	YADJ	IFV	BH	BW	BL	XADJ	YADJ
1	0.0,	0.0,	0.0,	0.0,	0.0,	2	0.0,	0.0,	0.0,	0.0,	0.0,
3	11.0,	190.4,	247.7,	-181.5,	-97.2,	4	11.0,	214.0,	240.2,	-160.9,	-104.7,
5	11.0,	231.0,	225.4,	-135.4,	-109.0,	6	11.0,	241.1,	203.8,	-105.8,	-110.0,
7	11.0,	243.8,	175.9,	-73.0,	-107.7,	8	11.0,	239.1,	142.7,	-37.9,	-102.1,
9	11.0,	229.9,	107.5,	-1.8,	-94.7,	10	11.0,	240.7,	126.8,	10.3,	-85.3,
11	11.0,	247.7,	161.1,	6.3,	-72.7,	12	11.0,	247.7,	190.4,	2.0,	-57.6,
13	11.0,	240.2,	214.0,	-2.2,	-40.8,	14	11.0,	225.4,	231.0,	-6.5,	-22.7,
15	11.0,	203.8,	241.1,	-10.5,	-3.9,	16	11.0,	175.9,	243.8,	-14.2,	15.0,
17	11.0,	142.7,	239.1,	-17.5,	33.4,	18	11.0,	107.5,	229.9,	-20.2,	52.0,
19	0.0,	0.0,	0.0,	0.0,	0.0,	20	0.0,	0.0,	0.0,	0.0,	0.0,
21	11.0,	190.4,	247.7,	-66.2,	97.2,	22	11.0,	214.0,	240.2,	-79.3,	104.7,
23	11.0,	231.0,	225.4,	-90.0,	109.0,	24	11.0,	241.1,	203.8,	-98.0,	110.0,
25	11.0,	243.8,	175.9,	-103.0,	107.7,	26	11.0,	239.1,	142.7,	-104.8,	102.1,
27	11.0,	229.9,	107.5,	-105.8,	94.7,	28	11.0,	240.7,	126.8,	-137.1,	85.3,
29	11.0,	247.7,	161.1,	-167.3,	72.7,	30	11.0,	247.7,	190.4,	-192.5,	57.6,
31	11.0,	240.2,	214.0,	-211.7,	40.8,	32	11.0,	225.4,	231.0,	-224.6,	22.7,
33	11.0,	203.8,	241.1,	-230.6,	3.9,	34	11.0,	175.9,	243.8,	-229.6,	-15.0,
35	11.0,	142.7,	239.1,	-221.6,	-33.4,	36	11.0,	107.5,	229.9,	-209.7,	-52.0,

SOURCE ID: STCK4

IFV	BH	BW	BL	XADJ	YADJ	IFV	BH	BW	BL	XADJ	YADJ
1	11.0,	126.8,	240.7,	-154.2,	-65.8,	2	11.0,	161.1,	247.7,	-147.3,	-70.1,

3	11.0,	190.4,	247.7,	-135.8,	-72.2,	4	11.0,	214.0,	240.2,	-120.3,	-72.2,
5	11.0,	231.0,	225.4,	-101.0,	-69.9,	6	11.0,	241.1,	203.8,	-78.8,	-65.5,
7	11.0,	243.8,	175.9,	-54.1,	-59.2,	8	11.0,	239.1,	142.7,	-27.8,	-51.0,
9	11.0,	229.9,	107.5,	-0.6,	-42.7,	10	11.0,	240.7,	126.8,	2.4,	-33.9,
11	11.0,	247.7,	161.1,	-10.4,	-23.4,	12	11.0,	247.7,	190.4,	-23.0,	-12.0,
13	11.0,	240.2,	214.0,	-34.8,	-0.2,	14	11.0,	225.4,	231.0,	-45.6,	11.7,
15	11.0,	203.8,	241.1,	-55.0,	23.1,	16	11.0,	175.9,	243.8,	-62.7,	33.9,
17	11.0,	142.7,	239.1,	-68.5,	43.6,	18	11.0,	107.5,	229.9,	-72.3,	53.2,
19	11.0,	126.8,	240.7,	-86.4,	65.8,	20	11.0,	161.1,	247.7,	-100.4,	70.1,
21	11.0,	190.4,	247.7,	-111.9,	72.2,	22	11.0,	214.0,	240.2,	-119.9,	72.2,
23	11.0,	231.0,	225.4,	-124.3,	69.9,	24	11.0,	241.1,	203.8,	-125.0,	65.5,
25	11.0,	243.8,	175.9,	-121.8,	59.2,	26	11.0,	239.1,	142.7,	-115.0,	51.0,
27	11.0,	229.9,	107.5,	-106.9,	42.7,	28	11.0,	240.7,	126.8,	-129.2,	33.9,
29	11.0,	247.7,	161.1,	-150.6,	23.4,	30	11.0,	247.7,	190.4,	-167.5,	12.0,
31	11.0,	240.2,	214.0,	-179.2,	0.2,	32	11.0,	225.4,	231.0,	-185.5,	-11.7,
33	11.0,	203.8,	241.1,	-186.1,	-23.1,	34	11.0,	175.9,	243.8,	-181.1,	-33.9,
35	11.0,	142.7,	239.1,	-170.6,	-43.6,	36	11.0,	107.5,	229.9,	-157.7,	-53.2,

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** DIRECTION SPECIFIC BUILDING DIMENSIONS ***

SOURCE ID: STCK5

IFV	BH	BW	BL	XADJ	YADJ	IFV	BH	BW	BL	XADJ	YADJ
1	11.0,	126.8,	240.7,	-111.4,	-60.2,	2	11.0,	161.1,	247.7,	-106.0,	-57.1,
3	11.0,	190.4,	247.7,	-97.5,	-52.2,	4	11.0,	214.0,	240.2,	-86.0,	-45.8,
5	11.0,	231.0,	225.4,	-71.9,	-38.0,	6	11.0,	241.1,	203.8,	-55.6,	-29.1,
7	11.0,	243.8,	175.9,	-37.6,	-19.2,	8	11.0,	239.1,	142.7,	-18.4,	-8.8,
9	11.0,	229.9,	107.5,	1.3,	0.5,	10	11.0,	240.7,	126.8,	-3.2,	9.0,
11	11.0,	247.7,	161.1,	-23.5,	17.8,	12	11.0,	247.7,	190.4,	-43.0,	26.4,
13	11.0,	240.2,	214.0,	-61.1,	34.1,	14	11.0,	225.4,	231.0,	-77.5,	40.8,
15	11.0,	203.8,	241.1,	-91.5,	46.3,	16	11.0,	175.9,	243.8,	-102.7,	50.4,
17	11.0,	142.7,	239.1,	-110.8,	52.9,	18	11.0,	107.5,	229.9,	-115.5,	55.0,
19	11.0,	126.8,	240.7,	-129.3,	60.2,	20	11.0,	161.1,	247.7,	-141.7,	57.1,
21	11.0,	190.4,	247.7,	-150.2,	52.2,	22	11.0,	214.0,	240.2,	-154.2,	45.8,
23	11.0,	231.0,	225.4,	-153.6,	38.0,	24	11.0,	241.1,	203.8,	-148.2,	29.1,
25	11.0,	243.8,	175.9,	-138.4,	19.2,	26	11.0,	239.1,	142.7,	-124.3,	8.8,
27	11.0,	229.9,	107.5,	-108.8,	-0.5,	28	11.0,	240.7,	126.8,	-123.6,	-9.0,
29	11.0,	247.7,	161.1,	-137.6,	-17.8,	30	11.0,	247.7,	190.4,	-147.5,	-26.4,
31	11.0,	240.2,	214.0,	-152.8,	-34.1,	32	11.0,	225.4,	231.0,	-153.6,	-40.8,
33	11.0,	203.8,	241.1,	-149.6,	-46.3,	34	11.0,	175.9,	243.8,	-141.1,	-50.4,
35	11.0,	142.7,	239.1,	-128.4,	-52.9,	36	11.0,	107.5,	229.9,	-114.5,	-55.0,

SOURCE ID: STCK6

IFV	BH	BW	BL	XADJ	YADJ	IFV	BH	BW	BL	XADJ	YADJ

```
   1   11.0,  126.8,  240.7,  -65.5,  -51.4,      2   11.0,  161.1,  247.7,  -62.4,  -40.4,
   3   11.0,  190.4,  247.7,  -57.4,  -28.3,      4   11.0,  214.0,  240.2,  -50.7,  -15.3,
   5   11.0,  231.0,  225.4,  -42.4,   -1.8,      6   11.0,  241.1,  203.8,  -32.8,   11.7,
   7   11.0,  243.8,  175.9,  -22.2,   24.9,      8   11.0,  239.1,  142.7,  -11.0,   37.3,
   9   11.0,  229.9,  107.5,    0.6,   47.2,     10   11.0,  240.7,  126.8,  -12.1,   54.8,
  11   11.0,  247.7,  161.1,  -40.1,   61.4,     12   11.0,  247.7,  190.4,  -66.9,   66.5,
  13   11.0,  240.2,  214.0,  -91.7,   69.4,     14   11.0,  225.4,  231.0, -113.7,   70.3,
  15   11.0,  203.8,  241.1, -132.2,   69.1,     16   11.0,  175.9,  243.8, -146.8,   65.7,
  17   11.0,  142.7,  239.1, -156.9,   60.4,     18   11.0,  107.5,  229.9, -162.2,   54.3,
  19   11.0,  126.8,  240.7, -175.1,   51.4,     20   11.0,  161.1,  247.7, -185.3,   40.4,
  21   11.0,  190.4,  247.7, -190.3,   28.3,     22   11.0,  214.0,  240.2, -189.5,   15.3,
  23   11.0,  231.0,  225.4, -183.0,    1.8,     24   11.0,  241.1,  203.8, -170.9,  -11.7,
  25   11.0,  243.8,  175.9, -153.7,  -24.9,     26   11.0,  239.1,  142.7, -131.7,  -37.3,
  27   11.0,  229.9,  107.5, -108.1,  -47.2,     28   11.0,  240.7,  126.8, -114.8,  -54.8,
  29   11.0,  247.7,  161.1, -121.0,  -61.4,     30   11.0,  247.7,  190.4, -123.5,  -66.5,
  31   11.0,  240.2,  214.0, -122.3,  -69.4,     32   11.0,  225.4,  231.0, -117.3,  -70.3,
  33   11.0,  203.8,  241.1, -108.8,  -69.1,     34   11.0,  175.9,  243.8,  -97.0,  -65.7,
  35   11.0,  142.7,  239.1,  -82.2,  -60.4,     36   11.0,  107.5,  229.9,  -67.8,  -54.3,

*** AERMOD - VERSION 22112  ***   *** 19370 Redlands Avenue West  - new site plan                          ***        04/04/23
*** AERMET - VERSION  16216 ***   *** DPM Conc 2026-39  1st 14YR                                         ***        19:12:16
                                                                                                                  PAGE  15
*** MODELOPTs:    RegDFAULT  CONC  ELEV  URBAN  ADJ_U*

                                    *** GRIDDED RECEPTOR NETWORK SUMMARY ***

                                 *** NETWORK ID: UCART1   ;  NETWORK TYPE: GRIDCART ***

                                      *** X-COORDINATES OF GRID ***
                                                (METERS)

     479286.7,  479311.7,  479336.7,  479361.7,  479386.7,  479411.7,  479436.7,  479461.7,  479486.7,  479511.7,
     479536.7,  479561.7,  479586.7,  479611.7,  479636.7,  479661.7,  479686.7,  479711.7,  479736.7,  479761.7,
     479786.7,

                                      *** Y-COORDINATES OF GRID ***
                                                (METERS)

    3742719.1, 3742744.1, 3742769.1, 3742794.1, 3742819.1, 3742844.1, 3742869.1, 3742894.1, 3742919.1, 3742944.1,
    3742969.1, 3742994.1, 3743019.1, 3743044.1, 3743069.1, 3743094.1, 3743119.1, 3743144.1, 3743169.1, 3743194.1,
    3743219.1,

*** AERMOD - VERSION 22112  ***   *** 19370 Redlands Avenue West  - new site plan                          ***        04/04/23
*** AERMET - VERSION  16216 ***   *** DPM Conc 2026-39  1st 14YR                                         ***        19:12:16
                                                                                                                  PAGE  16
*** MODELOPTs:    RegDFAULT  CONC  ELEV  URBAN  ADJ_U*

                                 *** NETWORK ID: UCART1   ;  NETWORK TYPE: GRIDCART ***

                                     * ELEVATION HEIGHTS IN METERS *
```

Y-COORD (METERS)	X-COORD (METERS)								
	479286.72	479311.72	479336.72	479361.72	479386.72	479411.72	479436.72	479461.72	479486.72
3743219.09	442.70	442.70	442.50	442.20	442.10	441.90	441.50	441.10	441.10
3743194.09	442.70	442.60	442.60	442.50	442.20	442.10	441.80	441.30	441.10
3743169.09	442.60	442.50	442.50	442.40	442.30	442.20	442.00	441.60	441.20
3743144.09	442.60	442.50	442.50	442.40	442.30	442.20	442.10	441.90	441.40
3743119.09	442.60	442.60	442.50	442.40	442.40	442.30	442.10	442.00	441.60
3743094.09	442.60	442.60	442.50	442.50	442.40	442.30	442.10	442.00	441.80
3743069.09	442.50	442.40	442.40	442.30	442.20	442.10	442.10	442.00	441.90
3743044.09	442.60	442.50	442.50	442.40	442.30	442.20	442.20	442.10	442.00
3743019.09	442.60	442.50	442.40	442.30	442.20	442.20	442.20	442.10	441.90
3742994.09	442.60	442.40	442.30	442.20	442.20	442.10	442.00	442.00	441.90
3742969.09	442.50	442.40	442.30	442.20	442.20	442.10	442.00	442.00	441.90
3742944.09	442.60	442.40	442.30	442.30	442.20	442.10	442.10	442.00	442.00
3742919.09	442.40	442.20	442.20	442.10	442.00	442.00	441.90	441.80	441.80
3742894.09	442.40	442.30	442.20	442.10	442.10	442.00	442.00	441.90	441.90
3742869.09	442.40	442.30	442.20	442.20	442.20	442.10	442.10	442.00	441.90
3742844.09	442.30	442.10	442.10	442.20	442.20	442.10	442.10	442.00	441.80
3742819.09	442.10	441.70	441.80	442.10	442.00	441.80	441.90	441.90	441.60
3742794.09	442.00	441.60	441.70	442.00	441.90	441.70	441.60	441.60	441.40
3742769.09	441.90	441.50	441.70	441.90	441.80	441.60	441.60	441.70	441.50
3742744.09	441.80	441.40	441.50	441.80	441.70	441.50	441.50	441.50	441.40
3742719.09	441.60	441.30	441.40	441.70	441.60	441.30	441.20	441.20	441.10

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

* ELEVATION HEIGHTS IN METERS *

Y-COORD (METERS)	X-COORD (METERS)								
	479511.72	479536.72	479561.72	479586.72	479611.72	479636.72	479661.72	479686.72	479711.72
3743219.09	441.20	441.30	441.40	441.40	441.40	441.40	441.30	441.30	441.20
3743194.09	441.00	441.00	441.10	441.20	441.20	441.20	441.10	441.10	441.00
3743169.09	441.00	441.00	441.00	441.10	441.10	441.10	441.00	441.00	441.00
3743144.09	440.80	440.60	440.60	440.60	440.60	440.60	440.60	440.60	440.70
3743119.09	441.00	440.70	440.60	440.60	440.60	440.50	440.50	440.50	440.60
3743094.09	441.70	441.60	441.50	441.40	441.30	441.30	441.20	441.20	441.20
3743069.09	442.00	442.00	441.80	441.60	441.50	441.40	441.40	441.30	441.30
3743044.09	441.90	441.90	441.80	441.60	441.40	441.40	441.30	441.30	441.20
3743019.09	441.80	441.80	441.70	441.50	441.40	441.30	441.20	441.20	441.10
3742994.09	441.80	441.70	441.70	441.50	441.30	441.20	441.10	441.00	441.00
3742969.09	441.80	441.70	441.60	441.50	441.30	441.20	441.10	441.00	440.90

3742944.09	441.90	441.70	441.50	441.40	441.30	441.20	441.10	441.00	440.90
3742919.09	441.70	441.60	441.50	441.40	441.40	441.30	441.10	441.00	441.00
3742894.09	441.80	441.70	441.50	441.40	441.40	441.30	441.20	441.10	441.00
3742869.09	441.80	441.80	441.60	441.40	441.30	441.20	441.10	441.00	441.00
3742844.09	441.70	441.70	441.70	441.40	441.00	441.00	441.00	440.90	440.90
3742819.09	441.40	441.40	441.40	441.10	440.70	440.60	440.80	440.80	440.80
3742794.09	441.20	441.10	441.00	440.80	440.60	440.40	440.50	440.70	440.70
3742769.09	441.30	441.20	441.10	441.00	440.80	440.50	440.30	440.50	440.60
3742744.09	441.30	441.10	441.10	441.00	440.80	440.50	440.20	440.20	440.50
3742719.09	441.00	440.90	440.80	440.60	440.50	440.40	440.20	440.00	440.20

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

* ELEVATION HEIGHTS IN METERS *

Y-COORD (METERS)	X-COORD (METERS) 479736.72	479761.72	479786.72
3743219.09	441.00	440.60	440.60
3743194.09	440.90	440.70	440.70
3743169.09	440.90	440.70	440.80
3743144.09	440.80	440.90	440.90
3743119.09	440.80	441.00	441.00
3743094.09	441.20	441.20	441.10
3743069.09	441.20	441.20	441.00
3743044.09	441.10	441.10	440.90
3743019.09	441.00	441.00	440.80
3742994.09	440.90	440.80	440.70
3742969.09	440.80	440.70	440.60
3742944.09	440.80	440.70	440.60
3742919.09	440.80	440.80	440.70
3742894.09	440.90	440.80	440.70
3742869.09	440.90	440.80	440.70
3742844.09	440.80	440.80	440.70
3742819.09	440.70	440.60	440.60
3742794.09	440.60	440.50	440.50
3742769.09	440.60	440.50	440.40
3742744.09	440.50	440.40	440.40
3742719.09	440.40	440.40	440.30

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

* HILL HEIGHT SCALES IN METERS *

Y-COORD (METERS)	X-COORD (METERS)								
	479286.72	479311.72	479336.72	479361.72	479386.72	479411.72	479436.72	479461.72	479486.72
3743219.09	442.70	442.70	442.50	442.20	442.10	441.90	441.50	441.10	441.10
3743194.09	442.70	442.60	442.60	442.50	442.20	442.10	441.80	441.30	441.10
3743169.09	442.60	442.50	442.50	442.40	442.30	442.20	442.00	441.60	441.20
3743144.09	442.60	442.50	442.50	442.40	442.30	442.20	442.10	441.90	441.40
3743119.09	442.60	442.60	442.50	442.40	442.40	442.30	442.10	442.00	441.60
3743094.09	442.60	442.60	442.50	442.50	442.40	442.30	442.10	442.00	441.80
3743069.09	442.50	442.40	442.40	442.30	442.20	442.10	442.10	442.00	441.90
3743044.09	442.60	442.50	442.50	442.40	442.30	442.20	442.20	442.10	442.00
3743019.09	442.60	442.50	442.40	442.30	442.20	442.20	442.20	442.10	441.90
3742994.09	442.60	442.40	442.30	442.20	442.20	442.10	442.00	442.00	441.90
3742969.09	442.50	442.40	442.30	442.20	442.20	442.10	442.00	442.00	441.90
3742944.09	442.60	442.40	442.30	442.30	442.20	442.10	442.10	442.00	442.00
3742919.09	442.40	442.20	442.20	442.10	442.00	442.00	441.90	441.80	441.80
3742894.09	442.40	442.30	442.20	442.10	442.10	442.00	442.00	441.90	441.90
3742869.09	442.40	442.30	442.20	442.20	442.20	442.10	442.10	442.00	441.90
3742844.09	442.30	442.10	442.10	442.20	442.20	442.10	442.10	442.00	441.80
3742819.09	442.10	441.70	441.80	442.10	442.00	441.80	441.90	441.90	441.60
3742794.09	442.00	441.60	441.70	442.00	441.90	441.70	441.60	441.60	441.40
3742769.09	441.90	441.50	441.70	441.90	441.80	441.60	441.60	441.70	441.50
3742744.09	441.80	441.40	441.50	441.80	441.70	441.50	441.50	441.50	441.40
3742719.09	441.60	441.30	441.40	441.70	441.60	441.30	441.20	441.20	441.10

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

* HILL HEIGHT SCALES IN METERS *

Y-COORD (METERS)	X-COORD (METERS)								
	479511.72	479536.72	479561.72	479586.72	479611.72	479636.72	479661.72	479686.72	479711.72
3743219.09	441.20	441.30	441.40	441.40	441.40	441.40	441.30	441.30	441.20
3743194.09	441.00	441.00	441.10	441.20	441.20	441.20	441.10	441.10	441.00
3743169.09	441.00	441.00	441.00	441.10	441.10	441.10	441.00	441.00	441.00
3743144.09	440.80	440.60	440.60	440.60	440.60	440.60	440.60	440.60	440.70
3743119.09	441.00	440.70	440.60	440.60	440.60	440.50	440.50	440.50	440.60
3743094.09	441.70	441.60	441.50	441.40	441.30	441.30	441.20	441.20	441.20
3743069.09	442.00	442.00	441.80	441.60	441.50	441.40	441.40	441.30	441.30
3743044.09	441.90	441.90	441.80	441.60	441.40	441.40	441.30	441.30	441.20

3743019.09	441.80	441.80	441.70	441.50	441.40	441.30	441.20	441.20	441.10
3742994.09	441.80	441.70	441.70	441.50	441.30	441.20	441.10	441.00	441.00
3742969.09	441.80	441.70	441.60	441.50	441.30	441.20	441.10	441.00	440.90
3742944.09	441.90	441.70	441.50	441.40	441.30	441.20	441.10	441.00	440.90
3742919.09	441.70	441.60	441.50	441.40	441.40	441.30	441.10	441.00	441.00
3742894.09	441.80	441.70	441.50	441.40	441.40	441.30	441.20	441.10	441.00
3742869.09	441.80	441.80	441.60	441.40	441.30	441.20	441.10	441.00	441.00
3742844.09	441.70	441.70	441.70	441.40	441.00	441.00	441.00	440.90	440.90
3742819.09	441.40	441.40	441.40	441.10	440.70	440.60	440.80	440.80	440.80
3742794.09	441.20	441.10	441.00	440.80	440.60	440.40	440.50	440.70	440.70
3742769.09	441.30	441.20	441.10	441.00	440.80	440.50	440.30	440.50	440.60
3742744.09	441.30	441.10	441.10	441.00	440.80	440.50	440.20	440.20	440.50
3742719.09	441.00	440.90	440.80	440.60	440.50	440.40	440.20	440.00	440.20

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

* HILL HEIGHT SCALES IN METERS *

Y-COORD (METERS)	X-COORD (METERS) 479736.72	479761.72	479786.72
3743219.09	441.00	440.60	440.60
3743194.09	440.90	440.70	440.70
3743169.09	440.90	440.70	440.80
3743144.09	440.80	440.90	440.90
3743119.09	440.80	441.00	441.00
3743094.09	441.20	441.20	441.10
3743069.09	441.20	441.20	441.00
3743044.09	441.10	441.10	440.90
3743019.09	441.00	441.00	440.80
3742994.09	440.90	440.80	440.70
3742969.09	440.80	440.70	440.60
3742944.09	440.80	440.70	440.60
3742919.09	440.80	440.80	440.70
3742894.09	440.90	440.80	440.70
3742869.09	440.90	440.80	440.70
3742844.09	440.80	440.80	440.70
3742819.09	440.70	440.60	440.60
3742794.09	440.60	440.50	440.50
3742769.09	440.60	440.50	440.40
3742744.09	440.50	440.40	440.40
3742719.09	440.40	440.40	440.30

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** DISCRETE CARTESIAN RECEPTORS ***
(X-COORD, Y-COORD, ZELEV, ZHILL, ZFLAG)
(METERS)

(	479365.8,	3743082.3,	442.4,	442.4,	0.0);	(	479387.2,	3743034.2,	442.3,	442.3,	0.0);
(	479424.4,	3742962.4,	442.1,	442.1,	0.0);	(	479458.5,	3742888.6,	441.9,	441.9,	0.0);
(	479491.7,	3742826.1,	441.6,	441.6,	0.0);	(	479707.3,	3742739.3,	440.4,	440.4,	0.0);
(	479568.5,	3743368.4,	440.7,	440.7,	0.0);	(	479517.3,	3743358.8,	441.1,	441.1,	0.0);

*** AERMOD - VERSION 22112 *** *** 19370 Redlands Avenue West - new site plan *** 04/04/23
*** AERMET - VERSION 16216 *** *** DPM Conc 2026-39 1st 14YR *** 19:12:16

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

* SOURCE-RECEPTOR COMBINATIONS FOR WHICH CALCULATIONS MAY NOT BE PERFORMED *
LESS THAN 1.0 METER; WITHIN OPENPIT; OR BEYOND 80KM FOR FASTAREA/FASTALL

SOURCE ID	- - RECEPTOR LOCATION - - XR (METERS)	YR (METERS)	DISTANCE (METERS)
L0000428	479511.7	3742869.1	-3.98
L0000429	479511.7	3742869.1	-2.15
L0000431	479511.7	3742894.1	-1.57
L0000434	479486.7	3742919.1	0.50
L0000435	479486.7	3742919.1	-3.25
L0000437	479486.7	3742944.1	-1.78
L0000438	479486.7	3742944.1	-1.89
L0000441	479461.7	3742969.1	-0.30
L0000443	479461.7	3742994.1	0.31
L0000444	479461.7	3742994.1	-7.75
L0000445	479461.7	3742994.1	-0.47
L0000446	479461.7	3743019.1	0.48
L0000447	479461.7	3743019.1	-6.77
L0000448	479461.7	3743019.1	-0.12
L0000449	479461.7	3743044.1	-0.50
L0000450	479461.7	3743044.1	-7.84
L0000451	479461.7	3743044.1	0.53
L0000453	479461.7	3743069.1	-0.95
L0000458	479511.7	3743094.1	-0.86
L0000459	479511.7	3743094.1	-7.37
L0000460	479511.7	3743094.1	0.64
L0000461	479536.7	3743094.1	-0.06
L0000462	479536.7	3743094.1	-3.32
L0000465	479561.7	3743094.1	-1.70
L0000467	479586.7	3743094.1	0.47
L0000468	479586.7	3743094.1	-1.82

L0000470	479611.7	3743094.1	-0.31
L0000471	479611.7	3743094.1	-1.83
L0000473	479636.7	3743094.1	-1.07
L0000474	479636.7	3743094.1	-1.74
L0000476	479661.7	3743094.1	-1.82
L0000478	479661.7	3742869.1	-0.45
L0000481	479661.7	3742894.1	0.25
L0000484	479661.7	3742919.1	0.46
L0000487	479661.7	3742944.1	0.74
L0000489	479661.7	3742969.1	0.97
L0000492	479661.7	3742994.1	0.66
L0000495	479661.7	3743019.1	0.40
L0000498	479661.7	3743044.1	0.21
L0000501	479661.7	3743069.1	0.08

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

* SOURCE-RECEPTOR COMBINATIONS FOR WHICH CALCULATIONS MAY NOT BE PERFORMED *
LESS THAN 1.0 METER; WITHIN OPENPIT; OR BEYOND 80KM FOR FASTAREA/FASTALL

SOURCE ID	- - RECEPTOR LOCATION - - XR (METERS)	YR (METERS)	DISTANCE (METERS)
L0000504	479661.7	3743094.1	0.01
L0000506	479661.7	3743119.1	-0.08
L0000509	479661.7	3743144.1	-0.89
L0000512	479661.7	3743169.1	-1.65
L0000515	479661.7	3743194.1	-2.36
L0000518	479661.7	3743219.1	-2.99

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** METEOROLOGICAL DAYS SELECTED FOR PROCESSING ***
(1=YES; 0=NO)

```
1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1  1 1 1 1 1
```

NOTE: METEOROLOGICAL DATA ACTUALLY PROCESSED WILL ALSO DEPEND ON WHAT IS INCLUDED IN THE DATA FILE.

*** UPPER BOUND OF FIRST THROUGH FIFTH WIND SPEED CATEGORIES ***
(METERS/SEC)

1.54, 3.09, 5.14, 8.23, 10.80,

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** UP TO THE FIRST 24 HOURS OF METEOROLOGICAL DATA ***

Surface file: E:\New MET data\PERI_V9_ADJU\PERI_v9.SFC Met Version: 16216
Profile file: E:\New MET data\PERI_V9_ADJU\PERI_v9.PFL
Surface format: FREE
Profile format: FREE
Surface station no.: 3171 Upper air station no.: 3190
Name: UNKNOWN Name: UNKNOWN
Year: 2010 Year: 2010

First 24 hours of scalar data

YR	MO	DY	JDY	HR	H0	U*	W*	DT/DZ	ZICNV	ZIMCH	M-O LEN	Z0	BOWEN	ALBEDO	REF WS	WD	HT	REF TA	HT
10	01	01	1	01	-7.9	0.125	-9.000	-9.000	-999.	106.	21.2	0.19	0.61	1.00	1.30	335.	9.1	282.5	5.5
10	01	01	1	02	-3.9	0.088	-9.000	-9.000	-999.	62.	15.1	0.19	0.61	1.00	0.90	142.	9.1	280.9	5.5
10	01	01	1	03	-3.9	0.088	-9.000	-9.000	-999.	62.	15.1	0.19	0.61	1.00	0.90	324.	9.1	280.4	5.5
10	01	01	1	04	-1.3	0.064	-9.000	-9.000	-999.	39.	18.3	0.19	0.61	1.00	0.40	294.	9.1	278.8	5.5
10	01	01	1	05	-3.9	0.088	-9.000	-9.000	-999.	62.	15.0	0.19	0.61	1.00	0.90	205.	9.1	278.1	5.5
10	01	01	1	06	-1.3	0.065	-9.000	-9.000	-999.	39.	18.3	0.19	0.61	1.00	0.40	3.	9.1	277.0	5.5
10	01	01	1	07	-8.0	0.125	-9.000	-9.000	-999.	106.	21.0	0.19	0.61	1.00	1.30	99.	9.1	277.0	5.5
10	01	01	1	08	-3.3	0.086	-9.000	-9.000	-999.	61.	16.8	0.19	0.61	0.54	0.90	319.	9.1	278.8	5.5
10	01	01	1	09	20.1	0.128	0.307	0.010	49.	110.	-9.0	0.19	0.61	0.33	0.90	239.	9.1	284.2	5.5
10	01	01	1	10	56.7	0.087	0.560	0.010	107.	62.	-1.0	0.19	0.61	0.26	0.40	188.	9.1	289.2	5.5
10	01	01	1	11	81.5	0.323	0.867	0.008	277.	441.	-35.9	0.19	0.61	0.23	2.70	310.	9.1	290.9	5.5
10	01	01	1	12	97.1	0.281	1.058	0.008	421.	357.	-19.7	0.19	0.61	0.22	2.20	357.	9.1	293.1	5.5
10	01	01	1	13	92.2	0.279	1.117	0.008	523.	354.	-20.4	0.19	0.61	0.22	2.20	356.	9.1	293.8	5.5
10	01	01	1	14	77.6	0.275	1.102	0.008	595.	347.	-23.2	0.19	0.61	0.23	2.20	50.	9.1	294.2	5.5
10	01	01	1	15	54.9	0.230	1.006	0.008	640.	266.	-19.2	0.19	0.61	0.27	1.80	53.	9.1	293.8	5.5
10	01	01	1	16	12.3	0.206	0.613	0.008	648.	225.	-61.5	0.19	0.61	0.36	1.80	11.	9.1	292.5	5.5
10	01	01	1	17	-3.6	0.087	-9.000	-9.000	-999.	71.	15.6	0.19	0.61	0.64	0.90	351.	9.1	290.4	5.5
10	01	01	1	18	-3.8	0.087	-9.000	-9.000	-999.	62.	15.2	0.19	0.61	1.00	0.90	186.	9.1	287.5	5.5
10	01	01	1	19	-3.8	0.087	-9.000	-9.000	-999.	62.	15.2	0.19	0.61	1.00	0.90	275.	9.1	285.9	5.5
10	01	01	1	20	-1.2	0.064	-9.000	-9.000	-999.	39.	18.1	0.19	0.61	1.00	0.40	181.	9.1	285.4	5.5
10	01	01	1	21	-7.8	0.125	-9.000	-9.000	-999.	106.	21.3	0.19	0.61	1.00	1.30	318.	9.1	284.9	5.5
10	01	01	1	22	-3.8	0.088	-9.000	-9.000	-999.	62.	15.1	0.19	0.61	1.00	0.90	196.	9.1	283.1	5.5
10	01	01	1	23	-3.8	0.088	-9.000	-9.000	-999.	62.	15.1	0.19	0.61	1.00	0.90	330.	9.1	281.4	5.5

```
10 01 01   1 24   -7.9  0.125 -9.000 -9.000 -999.  106.     21.2  0.19   0.61   1.00    1.30  332.    9.1  280.9    5.5


First hour of profile data
YR MO DY HR HEIGHT F  WDIR    WSPD AMB_TMP sigmaA  sigmaW  sigmaV
10 01 01 01    5.5 0 -999.  -99.00   282.6   99.0  -99.00  -99.00
10 01 01 01    9.1 1  335.    1.30  -999.0   99.0  -99.00  -99.00

F indicates top of profile (=1) or below (=0)

*** AERMOD - VERSION 22112  ***   *** 19370 Redlands Avenue West  - new site plan                          ***        04/04/23
*** AERMET - VERSION  16216 ***   *** DPM Conc 2026-39  1st 14YR                                          ***        19:12:16
                                                                                                                   PAGE  27
*** MODELOPTs:    RegDFAULT  CONC  ELEV  URBAN  ADJ_U*

                          *** THE PERIOD ( 43824 HRS) AVERAGE CONCENTRATION   VALUES FOR SOURCE GROUP: ALL      ***
                              INCLUDING SOURCE(S):     STCK1       , STCK2       , STCK3       , STCK4       , STCK5       ,
               STCK6       , L0000411    , L0000412    , L0000413    , L0000414    , L0000415    , L0000416    , L0000417    ,
               L0000418    , L0000419    , L0000420    , L0000421    , L0000422    , L0000423    , L0000424    , L0000425    ,
               L0000426    , L0000427    , L0000428    , L0000429    , L0000430    , L0000431    , L0000432    ,  . . .      ,

                               *** NETWORK ID: UCART1   ;  NETWORK TYPE: GRIDCART ***

                                    ** CONC OF DPM      IN MICROGRAMS/M**3                        **

   Y-COORD  |                                          X-COORD (METERS)
   (METERS) |    479286.72    479311.72    479336.72    479361.72    479386.72    479411.72    479436.72    479461.72    479486.72
- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - -

 3743219.09 |       0.00106      0.00121      0.00139      0.00159      0.00182      0.00208      0.00234      0.00261      0.00287
 3743194.09 |       0.00107      0.00123      0.00141      0.00163      0.00190      0.00220      0.00252      0.00288      0.00322
 3743169.09 |       0.00108      0.00124      0.00144      0.00168      0.00197      0.00232      0.00272      0.00318      0.00365
 3743144.09 |       0.00108      0.00125      0.00145      0.00171      0.00203      0.00244      0.00294      0.00353      0.00420
 3743119.09 |       0.00108      0.00125      0.00146      0.00173      0.00208      0.00254      0.00318      0.00400      0.00531
 3743094.09 |       0.00108      0.00124      0.00146      0.00173      0.00212      0.00265      0.00350      0.00504      0.00700
 3743069.09 |       0.00107      0.00124      0.00145      0.00174      0.00214      0.00278      0.00393      0.00602      0.00695
 3743044.09 |       0.00106      0.00122      0.00143      0.00172      0.00214      0.00286      0.00422      0.00503      0.00610
 3743019.09 |       0.00105      0.00121      0.00141      0.00170      0.00213      0.00284      0.00423      0.00482      0.00564
 3742994.09 |       0.00103      0.00119      0.00139      0.00166      0.00205      0.00278      0.00391      0.00455      0.00556
 3742969.09 |       0.00101      0.00116      0.00135      0.00160      0.00198      0.00258      0.00361      0.00499      0.00572
 3742944.09 |       0.00099      0.00113      0.00130      0.00153      0.00184      0.00239      0.00315      0.00428      0.00522
 3742919.09 |       0.00097      0.00110      0.00126      0.00146      0.00173      0.00215      0.00285      0.00359      0.00499
 3742894.09 |       0.00094      0.00106      0.00121      0.00139      0.00162      0.00195      0.00252      0.00328      0.00459
 3742869.09 |       0.00090      0.00102      0.00115      0.00131      0.00151      0.00177      0.00218      0.00290      0.00384
 3742844.09 |       0.00087      0.00097      0.00109      0.00123      0.00140      0.00161      0.00190      0.00236      0.00315
 3742819.09 |       0.00083      0.00092      0.00103      0.00115      0.00129      0.00147      0.00169      0.00200      0.00244
 3742794.09 |       0.00079      0.00087      0.00096      0.00107      0.00119      0.00133      0.00151      0.00174      0.00205
 3742769.09 |       0.00075      0.00082      0.00090      0.00099      0.00109      0.00120      0.00135      0.00153      0.00176
 3742744.09 |       0.00071      0.00077      0.00084      0.00091      0.00100      0.00109      0.00121      0.00136      0.00154
 3742719.09 |       0.00067      0.00072      0.00078      0.00084      0.00092      0.00100      0.00109      0.00121      0.00136
```

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** THE PERIOD (43824 HRS) AVERAGE CONCENTRATION VALUES FOR SOURCE GROUP: ALL ***
INCLUDING SOURCE(S): STCK1 , STCK2 , STCK3 , STCK4 , STCK5 ,
STCK6 , L0000411 , L0000412 , L0000413 , L0000414 , L0000415 , L0000416 , L0000417 ,
L0000418 , L0000419 , L0000420 , L0000421 , L0000422 , L0000423 , L0000424 , L0000425 ,
L0000426 , L0000427 , L0000428 , L0000429 , L0000430 , L0000431 , L0000432 , . . . ,

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

** CONC OF DPM IN MICROGRAMS/M**3 **

Y-COORD (METERS)	X-COORD (METERS)								
	479511.72	479536.72	479561.72	479586.72	479611.72	479636.72	479661.72	479686.72	479711.72
3743219.09	0.00307	0.00319	0.00323	0.00321	0.00315	0.00316	0.00359	0.00292	0.00219
3743194.09	0.00352	0.00371	0.00380	0.00378	0.00366	0.00358	0.00387	0.00315	0.00233
3743169.09	0.00409	0.00443	0.00462	0.00464	0.00442	0.00412	0.00420	0.00339	0.00247
3743144.09	0.00485	0.00557	0.00615	0.00619	0.00575	0.00505	0.00457	0.00358	0.00258
3743119.09	0.00646	0.00736	0.00827	0.00811	0.00751	0.00626	0.00521	0.00382	0.00265
3743094.09	0.00700	0.00902	0.01342	0.01328	0.01230	0.00802	0.00523	0.00400	0.00282
3743069.09	0.00699	0.00875	0.01786	0.01875	0.01766	0.01159	0.00571	0.00428	0.00297
3743044.09	0.00684	0.00882	0.01872	0.01981	0.01850	0.01272	0.00576	0.00434	0.00309
3743019.09	0.00672	0.00901	0.01928	0.02017	0.01902	0.01287	0.00583	0.00425	0.00309
3742994.09	0.00660	0.00900	0.01957	0.02052	0.01912	0.01281	0.00589	0.00422	0.00307
3742969.09	0.00658	0.00892	0.01951	0.02056	0.01919	0.01272	0.00591	0.00421	0.00306
3742944.09	0.00638	0.00878	0.01898	0.02009	0.01905	0.01253	0.00587	0.00428	0.00311
3742919.09	0.00655	0.00960	0.01831	0.01938	0.01877	0.01227	0.00584	0.00435	0.00321
3742894.09	0.00639	0.01381	0.01717	0.01807	0.01776	0.01170	0.00584	0.00441	0.00337
3742869.09	0.00539	0.01132	0.01390	0.01456	0.01428	0.01006	0.00610	0.00449	0.00338
3742844.09	0.00440	0.00646	0.00728	0.00795	0.00820	0.00758	0.00584	0.00433	0.00313
3742819.09	0.00318	0.00424	0.00532	0.00605	0.00617	0.00582	0.00495	0.00390	0.00308
3742794.09	0.00246	0.00304	0.00379	0.00433	0.00448	0.00425	0.00398	0.00356	0.00298
3742769.09	0.00205	0.00242	0.00284	0.00322	0.00343	0.00347	0.00337	0.00314	0.00276
3742744.09	0.00176	0.00203	0.00233	0.00262	0.00282	0.00290	0.00287	0.00274	0.00251
3742719.09	0.00153	0.00174	0.00196	0.00218	0.00236	0.00246	0.00247	0.00240	0.00225

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** THE PERIOD (43824 HRS) AVERAGE CONCENTRATION VALUES FOR SOURCE GROUP: ALL ***
INCLUDING SOURCE(S): STCK1 , STCK2 , STCK3 , STCK4 , STCK5 ,
STCK6 , L0000411 , L0000412 , L0000413 , L0000414 , L0000415 , L0000416 , L0000417 ,
L0000418 , L0000419 , L0000420 , L0000421 , L0000422 , L0000423 , L0000424 , L0000425 ,
L0000426 , L0000427 , L0000428 , L0000429 , L0000430 , L0000431 , L0000432 , . . . ,

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

** CONC OF DPM IN MICROGRAMS/M**3 **

Y-COORD (METERS)	X-COORD (METERS)		
	479736.72	479761.72	479786.72
3743219.09	0.00180	0.00152	0.00131
3743194.09	0.00189	0.00158	0.00135
3743169.09	0.00198	0.00164	0.00139
3743144.09	0.00205	0.00169	0.00143
3743119.09	0.00210	0.00172	0.00145
3743094.09	0.00216	0.00176	0.00147
3743069.09	0.00226	0.00180	0.00149
3743044.09	0.00236	0.00184	0.00152
3743019.09	0.00243	0.00189	0.00155
3742994.09	0.00244	0.00194	0.00158
3742969.09	0.00248	0.00197	0.00161
3742944.09	0.00255	0.00201	0.00163
3742919.09	0.00261	0.00203	0.00166
3742894.09	0.00261	0.00205	0.00169
3742869.09	0.00255	0.00205	0.00171
3742844.09	0.00251	0.00206	0.00172
3742819.09	0.00249	0.00205	0.00172
3742794.09	0.00245	0.00204	0.00172
3742769.09	0.00235	0.00199	0.00170
3742744.09	0.00221	0.00192	0.00166
3742719.09	0.00205	0.00182	0.00160

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** THE PERIOD (43824 HRS) AVERAGE CONCENTRATION VALUES FOR SOURCE GROUP: ALL ***
INCLUDING SOURCE(S): STCK1 , STCK2 , STCK3 , STCK4 , STCK5 ,
STCK6 , L0000411 , L0000412 , L0000413 , L0000414 , L0000415 , L0000416 , L0000417 ,
L0000418 , L0000419 , L0000420 , L0000421 , L0000422 , L0000423 , L0000424 , L0000425 ,
L0000426 , L0000427 , L0000428 , L0000429 , L0000430 , L0000431 , L0000432 , . . . ,

*** DISCRETE CARTESIAN RECEPTOR POINTS ***

** CONC OF DPM IN MICROGRAMS/M**3 **

X-COORD (M)	Y-COORD (M)	CONC	X-COORD (M)	Y-COORD (M)	CONC
479365.78	3743082.33	0.00179	479387.25	3743034.16	0.00214
479424.43	3742962.42	0.00301	479458.46	3742888.59	0.00310
479491.70	3742826.08	0.00276	479707.32	3742739.31	0.00250
479568.49	3743368.43	0.00162	479517.30	3743358.85	0.00167

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** THE SUMMARY OF MAXIMUM PERIOD (43824 HRS) RESULTS ***

** CONC OF DPM IN MICROGRAMS/M**3 **

GROUP ID	AVERAGE CONC	RECEPTOR (XR, YR, ZELEV, ZHILL, ZFLAG)	OF TYPE	NETWORK GRID-ID
ALL	1ST HIGHEST VALUE IS	0.02056 AT (479586.72, 3742969.09, 441.50, 441.50, 0.00)	GC	UCART1
	2ND HIGHEST VALUE IS	0.02052 AT (479586.72, 3742994.09, 441.50, 441.50, 0.00)	GC	UCART1
	3RD HIGHEST VALUE IS	0.02017 AT (479586.72, 3743019.09, 441.50, 441.50, 0.00)	GC	UCART1
	4TH HIGHEST VALUE IS	0.02009 AT (479586.72, 3742944.09, 441.40, 441.40, 0.00)	GC	UCART1
	5TH HIGHEST VALUE IS	0.01981 AT (479586.72, 3743044.09, 441.60, 441.60, 0.00)	GC	UCART1
	6TH HIGHEST VALUE IS	0.01957 AT (479561.72, 3742994.09, 441.70, 441.70, 0.00)	GC	UCART1
	7TH HIGHEST VALUE IS	0.01951 AT (479561.72, 3742969.09, 441.60, 441.60, 0.00)	GC	UCART1
	8TH HIGHEST VALUE IS	0.01938 AT (479586.72, 3742919.09, 441.40, 441.40, 0.00)	GC	UCART1
	9TH HIGHEST VALUE IS	0.01928 AT (479561.72, 3743019.09, 441.70, 441.70, 0.00)	GC	UCART1
	10TH HIGHEST VALUE IS	0.01919 AT (479611.72, 3742969.09, 441.30, 441.30, 0.00)	GC	UCART1

*** RECEPTOR TYPES: GC = GRIDCART
GP = GRIDPOLR
DC = DISCCART
DP = DISCPOLR

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** Message Summary : AERMOD Model Execution ***

--------- Summary of Total Messages --------

```
A Total of            0 Fatal Error Message(s)
A Total of           10 Warning Message(s)
A Total of         2028 Informational Message(s)

A Total of        43824 Hours Were Processed

A Total of          978 Calm Hours Identified

A Total of         1050 Missing Hours Identified (  2.40 Percent)


   ******** FATAL ERROR MESSAGES ********
             ***  NONE  ***


   ********   WARNING MESSAGES   ********
SO W320     290        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
SO W320     291        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
SO W320     292        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
SO W320     293        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
SO W320     294        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
SO W320     295        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
ME W186     719       MEOPEN: THRESH_1MIN 1-min ASOS wind speed threshold used          0.50
ME W187     719       MEOPEN: ADJ_U* Option for Stable Low Winds used in AERMET
MX W450   17521       CHKDAT: Record Out of Sequence in Meteorological File at:     14010101
MX W450   17521       CHKDAT: Record Out of Sequence in Meteorological File at:    2 year gap

   ***********************************
   *** AERMOD Finishes Successfully ***
   ***********************************
```

```
** Lakes Environmental AERMOD MPI
**
**************************************
**
** AERMOD Input Produced by:
** AERMOD View Ver. 11.2.0
** Lakes Environmental Software Inc.
** Date: 4/4/2023
** File: C:\Lakes\AERMOD View\19370 Redlands Avenue West 2nd 14YR\19370 Redlands Avenue West 2nd 14YR.ADI
**
**************************************
**
**
**************************************
** AERMOD Control Pathway
**************************************
**
**
CO STARTING
   TITLEONE 19370 Redlands Avenue West  - new site plan
   TITLETWO DPM Conc 2040-53  2nd 14YR
   MODELOPT DFAULT CONC
   AVERTIME PERIOD
   URBANOPT 2189641 Riverside_County
   POLLUTID DPM
   RUNORNOT RUN
   ERRORFIL "19370 Redlands Avenue West 2nd 14YR.err"
CO FINISHED
**
**************************************
** AERMOD Source Pathway
**************************************
**
**
SO STARTING
** Source Location **
** Source ID - Type - X Coord. - Y Coord. **
   LOCATION STCK1        POINT      479650.520  3743097.530      441.230
** DESCRSRC Idling location
   LOCATION STCK2        POINT      479648.780  3742857.061      441.140
** DESCRSRC Idling location
   LOCATION STCK3        POINT      479532.538  3743072.983      441.920
** DESCRSRC Idling location
   LOCATION STCK4        POINT      479531.377  3743020.952      441.800
** DESCRSRC Idling location
   LOCATION STCK5        POINT      479529.519  3742977.748      441.680
** DESCRSRC Idling location
   LOCATION STCK6        POINT      479530.216  3742931.060      441.680
** DESCRSRC Idling location
** ----------------------------------------------------------------------
** Line Source Represented by Adjacent Volume Sources
```

```
** LINE VOLUME Source ID = SLINE1
** DESCRSRC Onsite truck travel
** PREFIX
** Length of Side = 8.59
** Configuration = Adjacent
** Emission Rate = 7.77E-06
** Elevated
** Building Height = 10.97
** SZINIT = 5.10
** Nodes = 11
** 479659.651, 3742857.442, 441.11, 3.50, 4.00
** 479633.553, 3742854.794, 441.08, 3.50, 4.00
** 479531.052, 3742855.929, 441.83, 3.50, 4.00
** 479520.840, 3742857.442, 441.83, 3.50, 4.00
** 479472.804, 3742961.834, 441.98, 3.50, 4.00
** 479458.809, 3742999.658, 442.03, 3.50, 4.00
** 479461.079, 3743039.750, 442.18, 3.50, 4.00
** 479470.535, 3743073.413, 441.94, 3.50, 4.00
** 479507.980, 3743094.594, 441.71, 3.50, 4.00
** 479548.451, 3743101.024, 441.34, 3.50, 4.00
** 479661.543, 3743099.511, 441.23, 3.50, 4.00
** ----------------------------------------------------------------------
   LOCATION L0000583     VOLUME   479655.378 3742857.008 441.14
   LOCATION L0000584     VOLUME   479646.831 3742856.141 441.13
   LOCATION L0000585     VOLUME   479638.284 3742855.274 441.12
   LOCATION L0000586     VOLUME   479629.718 3742854.837 441.11
   LOCATION L0000587     VOLUME   479621.128 3742854.932 441.12
   LOCATION L0000588     VOLUME   479612.537 3742855.027 441.14
   LOCATION L0000589     VOLUME   479603.947 3742855.122 441.15
   LOCATION L0000590     VOLUME   479595.357 3742855.217 441.29
   LOCATION L0000591     VOLUME   479586.766 3742855.312 441.44
   LOCATION L0000592     VOLUME   479578.176 3742855.407 441.58
   LOCATION L0000593     VOLUME   479569.586 3742855.502 441.65
   LOCATION L0000594     VOLUME   479560.996 3742855.597 441.72
   LOCATION L0000595     VOLUME   479552.405 3742855.692 441.79
   LOCATION L0000596     VOLUME   479543.815 3742855.788 441.80
   LOCATION L0000597     VOLUME   479535.225 3742855.883 441.81
   LOCATION L0000598     VOLUME   479526.682 3742856.576 441.82
   LOCATION L0000599     VOLUME   479519.717 3742859.881 441.83
   LOCATION L0000600     VOLUME   479516.126 3742867.685 441.83
   LOCATION L0000601     VOLUME   479512.535 3742875.489 441.85
   LOCATION L0000602     VOLUME   479508.944 3742883.294 441.86
   LOCATION L0000603     VOLUME   479505.353 3742891.098 441.84
   LOCATION L0000604     VOLUME   479501.762 3742898.902 441.83
   LOCATION L0000605     VOLUME   479498.171 3742906.706 441.80
   LOCATION L0000606     VOLUME   479494.580 3742914.510 441.78
   LOCATION L0000607     VOLUME   479490.989 3742922.315 441.84
   LOCATION L0000608     VOLUME   479487.398 3742930.119 441.89
   LOCATION L0000609     VOLUME   479483.807 3742937.923 441.95
   LOCATION L0000610     VOLUME   479480.216 3742945.727 442.00
   LOCATION L0000611     VOLUME   479476.625 3742953.532 441.98
```

```
   LOCATION L0000612     VOLUME   479473.033 3742961.336 441.97
   LOCATION L0000613     VOLUME   479470.013 3742969.377 441.95
   LOCATION L0000614     VOLUME   479467.032 3742977.434 441.95
   LOCATION L0000615     VOLUME   479464.051 3742985.491 441.98
   LOCATION L0000616     VOLUME   479461.070 3742993.548 442.00
   LOCATION L0000617     VOLUME   479458.927 3743001.730 442.03
   LOCATION L0000618     VOLUME   479459.412 3743010.307 442.06
   LOCATION L0000619     VOLUME   479459.898 3743018.884 442.10
   LOCATION L0000620     VOLUME   479460.383 3743027.461 442.15
   LOCATION L0000621     VOLUME   479460.869 3743036.039 442.19
   LOCATION L0000622     VOLUME   479462.397 3743044.442 442.13
   LOCATION L0000623     VOLUME   479464.720 3743052.713 442.06
   LOCATION L0000624     VOLUME   479467.043 3743060.983 442.00
   LOCATION L0000625     VOLUME   479469.366 3743069.254 441.95
   LOCATION L0000626     VOLUME   479474.252 3743075.516 441.92
   LOCATION L0000627     VOLUME   479481.729 3743079.745 441.90
   LOCATION L0000628     VOLUME   479489.207 3743083.975 441.87
   LOCATION L0000629     VOLUME   479496.684 3743088.205 441.81
   LOCATION L0000630     VOLUME   479504.162 3743092.434 441.74
   LOCATION L0000631     VOLUME   479512.132 3743095.254 441.67
   LOCATION L0000632     VOLUME   479520.616 3743096.602 441.61
   LOCATION L0000633     VOLUME   479529.101 3743097.950 441.56
   LOCATION L0000634     VOLUME   479537.585 3743099.298 441.50
   LOCATION L0000635     VOLUME   479546.069 3743100.646 441.43
   LOCATION L0000636     VOLUME   479554.630 3743100.941 441.40
   LOCATION L0000637     VOLUME   479563.220 3743100.827 441.36
   LOCATION L0000638     VOLUME   479571.810 3743100.712 441.32
   LOCATION L0000639     VOLUME   479580.400 3743100.597 441.28
   LOCATION L0000640     VOLUME   479588.990 3743100.482 441.26
   LOCATION L0000641     VOLUME   479597.580 3743100.367 441.23
   LOCATION L0000642     VOLUME   479606.170 3743100.252 441.21
   LOCATION L0000643     VOLUME   479614.760 3743100.137 441.19
   LOCATION L0000644     VOLUME   479623.350 3743100.022 441.17
   LOCATION L0000645     VOLUME   479631.940 3743099.907 441.16
   LOCATION L0000646     VOLUME   479640.530 3743099.792 441.16
   LOCATION L0000647     VOLUME   479649.120 3743099.677 441.16
   LOCATION L0000648     VOLUME   479657.710 3743099.562 441.16
** End of LINE VOLUME Source ID = SLINE1
** ----------------------------------------------------------------------
** Line Source Represented by Adjacent Volume Sources
** LINE VOLUME Source ID = SLINE2
** DESCRSRC Redlands Ave southern project driveway to northern project driveway
** PREFIX
** Length of Side = 8.59
** Configuration = Adjacent
** Emission Rate = 9.35E-07
** Elevated
** Vertical Dimension = 7.00
** SZINIT = 1.63
** Nodes = 3
** 479668.640, 3742857.589, 441.06, 3.50, 4.00
```

```
** 479670.318, 3742876.889, 441.14, 3.50, 4.00
** 479670.328, 3743099.110, 441.22, 3.50, 4.00
** ----------------------------------------------------------------------
   LOCATION L0000649     VOLUME   479669.012 3742861.868 441.08
   LOCATION L0000650     VOLUME   479669.756 3742870.427 441.10
   LOCATION L0000651     VOLUME   479670.318 3742878.993 441.13
   LOCATION L0000652     VOLUME   479670.319 3742887.584 441.14
   LOCATION L0000653     VOLUME   479670.319 3742896.175 441.13
   LOCATION L0000654     VOLUME   479670.320 3742904.766 441.13
   LOCATION L0000655     VOLUME   479670.320 3742913.356 441.12
   LOCATION L0000656     VOLUME   479670.320 3742921.947 441.09
   LOCATION L0000657     VOLUME   479670.321 3742930.538 441.06
   LOCATION L0000658     VOLUME   479670.321 3742939.129 441.04
   LOCATION L0000659     VOLUME   479670.322 3742947.720 441.02
   LOCATION L0000660     VOLUME   479670.322 3742956.310 441.02
   LOCATION L0000661     VOLUME   479670.322 3742964.901 441.02
   LOCATION L0000662     VOLUME   479670.323 3742973.492 441.02
   LOCATION L0000663     VOLUME   479670.323 3742982.083 441.05
   LOCATION L0000664     VOLUME   479670.323 3742990.674 441.09
   LOCATION L0000665     VOLUME   479670.324 3742999.264 441.12
   LOCATION L0000666     VOLUME   479670.324 3743007.855 441.16
   LOCATION L0000667     VOLUME   479670.325 3743016.446 441.20
   LOCATION L0000668     VOLUME   479670.325 3743025.037 441.23
   LOCATION L0000669     VOLUME   479670.325 3743033.628 441.27
   LOCATION L0000670     VOLUME   479670.326 3743042.218 441.30
   LOCATION L0000671     VOLUME   479670.326 3743050.809 441.33
   LOCATION L0000672     VOLUME   479670.327 3743059.400 441.35
   LOCATION L0000673     VOLUME   479670.327 3743067.991 441.37
   LOCATION L0000674     VOLUME   479670.327 3743076.582 441.32
   LOCATION L0000675     VOLUME   479670.328 3743085.172 441.28
   LOCATION L0000676     VOLUME   479670.328 3743093.763 441.23
** End of LINE VOLUME Source ID = SLINE2
** ----------------------------------------------------------------------
** Line Source Represented by Adjacent Volume Sources
** LINE VOLUME Source ID = SLINE3
** DESCRSRC Redlands Ave north of northern project driveway
** PREFIX
** Length of Side = 8.59
** Configuration = Adjacent
** Emission Rate = 5.2E-06
** Elevated
** Vertical Dimension = 7.00
** SZINIT = 1.63
** Nodes = 10
** 479670.085, 3743103.428, 441.03, 3.50, 4.00
** 479666.590, 3743250.337, 441.29, 3.50, 4.00
** 479665.586, 3743329.579, 440.69, 3.50, 4.00
** 479667.593, 3743384.748, 440.26, 3.50, 4.00
** 479673.611, 3743417.849, 439.90, 3.50, 4.00
** 479686.651, 3743467.000, 440.36, 3.50, 4.00
** 479693.672, 3743507.123, 440.49, 3.50, 4.00
```

```
** 479698.688, 3743551.258, 440.18, 3.50, 4.00
** 479700.694, 3743608.433, 439.59, 3.50, 4.00
** 479699.691, 3743771.933, 440.59, 3.50, 4.00
** ----------------------------------------------------------------
   LOCATION L0000677     VOLUME   479669.983 3743107.722 440.88
   LOCATION L0000678     VOLUME   479669.778 3743116.311 440.60
   LOCATION L0000679     VOLUME   479669.574 3743124.899 440.32
   LOCATION L0000680     VOLUME   479669.370 3743133.487 440.33
   LOCATION L0000681     VOLUME   479669.165 3743142.076 440.54
   LOCATION L0000682     VOLUME   479668.961 3743150.664 440.76
   LOCATION L0000683     VOLUME   479668.757 3743159.252 440.97
   LOCATION L0000684     VOLUME   479668.552 3743167.841 441.00
   LOCATION L0000685     VOLUME   479668.348 3743176.429 441.02
   LOCATION L0000686     VOLUME   479668.144 3743185.017 441.04
   LOCATION L0000687     VOLUME   479667.939 3743193.606 441.09
   LOCATION L0000688     VOLUME   479667.735 3743202.194 441.16
   LOCATION L0000689     VOLUME   479667.531 3743210.783 441.24
   LOCATION L0000690     VOLUME   479667.326 3743219.371 441.31
   LOCATION L0000691     VOLUME   479667.122 3743227.959 441.32
   LOCATION L0000692     VOLUME   479666.918 3743236.548 441.32
   LOCATION L0000693     VOLUME   479666.713 3743245.136 441.31
   LOCATION L0000694     VOLUME   479666.547 3743253.725 441.29
   LOCATION L0000695     VOLUME   479666.438 3743262.315 441.23
   LOCATION L0000696     VOLUME   479666.329 3743270.905 441.16
   LOCATION L0000697     VOLUME   479666.220 3743279.495 441.09
   LOCATION L0000698     VOLUME   479666.112 3743288.086 440.97
   LOCATION L0000699     VOLUME   479666.003 3743296.676 440.83
   LOCATION L0000700     VOLUME   479665.894 3743305.266 440.68
   LOCATION L0000701     VOLUME   479665.785 3743313.856 440.55
   LOCATION L0000702     VOLUME   479665.677 3743322.446 440.61
   LOCATION L0000703     VOLUME   479665.639 3743331.035 440.67
   LOCATION L0000704     VOLUME   479665.952 3743339.620 440.74
   LOCATION L0000705     VOLUME   479666.264 3743348.206 440.74
   LOCATION L0000706     VOLUME   479666.576 3743356.791 440.68
   LOCATION L0000707     VOLUME   479666.888 3743365.376 440.62
   LOCATION L0000708     VOLUME   479667.200 3743373.961 440.56
   LOCATION L0000709     VOLUME   479667.513 3743382.546 440.37
   LOCATION L0000710     VOLUME   479668.735 3743391.032 440.18
   LOCATION L0000711     VOLUME   479670.272 3743399.485 440.00
   LOCATION L0000712     VOLUME   479671.809 3743407.937 439.84
   LOCATION L0000713     VOLUME   479673.345 3743416.389 439.72
   LOCATION L0000714     VOLUME   479675.433 3743424.718 439.60
   LOCATION L0000715     VOLUME   479677.636 3743433.022 439.47
   LOCATION L0000716     VOLUME   479679.839 3743441.325 439.57
   LOCATION L0000717     VOLUME   479682.042 3743449.629 439.84
   LOCATION L0000718     VOLUME   479684.245 3743457.932 440.09
   LOCATION L0000719     VOLUME   479686.448 3743466.236 440.34
   LOCATION L0000720     VOLUME   479687.996 3743474.684 440.41
   LOCATION L0000721     VOLUME   479689.476 3743483.146 440.45
   LOCATION L0000722     VOLUME   479690.957 3743491.608 440.49
   LOCATION L0000723     VOLUME   479692.438 3743500.070 440.51
```

```
   LOCATION L0000724     VOLUME   479693.834 3743508.545 440.49
   LOCATION L0000725     VOLUME   479694.804 3743517.081 440.46
   LOCATION L0000726     VOLUME   479695.774 3743525.616 440.43
   LOCATION L0000727     VOLUME   479696.744 3743534.152 440.38
   LOCATION L0000728     VOLUME   479697.714 3743542.688 440.30
   LOCATION L0000729     VOLUME   479698.684 3743551.224 440.23
   LOCATION L0000730     VOLUME   479698.988 3743559.809 440.15
   LOCATION L0000731     VOLUME   479699.289 3743568.395 440.13
   LOCATION L0000732     VOLUME   479699.590 3743576.980 440.11
   LOCATION L0000733     VOLUME   479699.892 3743585.566 440.08
   LOCATION L0000734     VOLUME   479700.193 3743594.151 439.99
   LOCATION L0000735     VOLUME   479700.494 3743602.737 439.82
   LOCATION L0000736     VOLUME   479700.676 3743611.324 439.65
   LOCATION L0000737     VOLUME   479700.623 3743619.915 439.48
   LOCATION L0000738     VOLUME   479700.571 3743628.505 439.44
   LOCATION L0000739     VOLUME   479700.518 3743637.096 439.43
   LOCATION L0000740     VOLUME   479700.465 3743645.687 439.42
   LOCATION L0000741     VOLUME   479700.413 3743654.277 439.51
   LOCATION L0000742     VOLUME   479700.360 3743662.868 439.86
   LOCATION L0000743     VOLUME   479700.307 3743671.459 440.21
   LOCATION L0000744     VOLUME   479700.255 3743680.049 440.56
   LOCATION L0000745     VOLUME   479700.202 3743688.640 440.67
   LOCATION L0000746     VOLUME   479700.149 3743697.230 440.68
   LOCATION L0000747     VOLUME   479700.096 3743705.821 440.68
   LOCATION L0000748     VOLUME   479700.044 3743714.412 440.67
   LOCATION L0000749     VOLUME   479699.991 3743723.002 440.55
   LOCATION L0000750     VOLUME   479699.938 3743731.593 440.43
   LOCATION L0000751     VOLUME   479699.886 3743740.184 440.30
   LOCATION L0000752     VOLUME   479699.833 3743748.774 440.31
   LOCATION L0000753     VOLUME   479699.780 3743757.365 440.43
   LOCATION L0000754     VOLUME   479699.728 3743765.956 440.56
** End of LINE VOLUME Source ID = SLINE3
   LOCATION PAREA1       AREAPOLY   479547.338  3743092.751      441.610
** DESCRSRC Emergency pumps and back-up generator
** Source Parameters **
   SRCPARAM STCK1        0.0000105     3.500   366.000    51.816       0.1
   SRCPARAM STCK2        0.0000105     3.500   366.000    51.816       0.1
   SRCPARAM STCK3        0.0000105     3.500   366.000    51.816       0.1
   SRCPARAM STCK4        0.0000105     3.500   366.000    51.816       0.1
   SRCPARAM STCK5        0.0000105     3.500   366.000    51.816       0.1
   SRCPARAM STCK6        0.0000105     3.500   366.000    51.816       0.1
** LINE VOLUME Source ID = SLINE1
   SRCPARAM L0000583     0.0000001177      3.50      4.00      5.10
   SRCPARAM L0000584     0.0000001177      3.50      4.00      5.10
   SRCPARAM L0000585     0.0000001177      3.50      4.00      5.10
   SRCPARAM L0000586     0.0000001177      3.50      4.00      5.10
   SRCPARAM L0000587     0.0000001177      3.50      4.00      5.10
   SRCPARAM L0000588     0.0000001177      3.50      4.00      5.10
   SRCPARAM L0000589     0.0000001177      3.50      4.00      5.10
   SRCPARAM L0000590     0.0000001177      3.50      4.00      5.10
   SRCPARAM L0000591     0.0000001177      3.50      4.00      5.10
```

```
SRCPARAM L0000592     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000593     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000594     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000595     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000596     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000597     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000598     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000599     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000600     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000601     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000602     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000603     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000604     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000605     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000606     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000607     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000608     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000609     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000610     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000611     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000612     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000613     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000614     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000615     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000616     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000617     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000618     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000619     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000620     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000621     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000622     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000623     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000624     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000625     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000626     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000627     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000628     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000629     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000630     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000631     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000632     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000633     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000634     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000635     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000636     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000637     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000638     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000639     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000640     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000641     0.0000001177      3.50      4.00      5.10
SRCPARAM L0000642     0.0000001177      3.50      4.00      5.10
```

```
   SRCPARAM L0000643     0.0000001177      3.50      4.00      5.10
   SRCPARAM L0000644     0.0000001177      3.50      4.00      5.10
   SRCPARAM L0000645     0.0000001177      3.50      4.00      5.10
   SRCPARAM L0000646     0.0000001177      3.50      4.00      5.10
   SRCPARAM L0000647     0.0000001177      3.50      4.00      5.10
   SRCPARAM L0000648     0.0000001177      3.50      4.00      5.10
** ------------------------------------------------------------------
** LINE VOLUME Source ID = SLINE2
   SRCPARAM L0000649     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000650     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000651     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000652     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000653     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000654     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000655     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000656     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000657     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000658     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000659     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000660     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000661     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000662     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000663     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000664     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000665     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000666     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000667     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000668     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000669     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000670     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000671     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000672     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000673     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000674     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000675     0.00000003339      3.50      4.00      1.63
   SRCPARAM L0000676     0.00000003339      3.50      4.00      1.63
** ------------------------------------------------------------------
** LINE VOLUME Source ID = SLINE3
   SRCPARAM L0000677     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000678     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000679     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000680     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000681     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000682     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000683     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000684     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000685     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000686     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000687     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000688     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000689     0.00000006667      3.50      4.00      1.63
```

```
SRCPARAM L0000690     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000691     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000692     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000693     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000694     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000695     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000696     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000697     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000698     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000699     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000700     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000701     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000702     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000703     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000704     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000705     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000706     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000707     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000708     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000709     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000710     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000711     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000712     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000713     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000714     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000715     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000716     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000717     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000718     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000719     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000720     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000721     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000722     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000723     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000724     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000725     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000726     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000727     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000728     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000729     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000730     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000731     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000732     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000733     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000734     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000735     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000736     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000737     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000738     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000739     0.00000006667      3.50      4.00      1.63
SRCPARAM L0000740     0.00000006667      3.50      4.00      1.63
```

```
   SRCPARAM L0000741     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000742     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000743     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000744     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000745     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000746     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000747     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000748     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000749     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000750     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000751     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000752     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000753     0.00000006667      3.50      4.00      1.63
   SRCPARAM L0000754     0.00000006667      3.50      4.00      1.63
** ------------------------------------------------------------------
   SRCPARAM PAREA1       1.1741E-09     0.914        14
   AREAVERT PAREA1       479547.338 3743092.751 479616.111 3743092.448
   AREAVERT PAREA1       479617.323 3743090.631 479629.442 3743090.631
   AREAVERT PAREA1       479629.442 3743090.025 479635.963 3743089.709
   AREAVERT PAREA1       479637.980 3743055.833 479636.098 3742875.967
   AREAVERT PAREA1       479635.425 3742866.557 479616.471 3742865.347
   AREAVERT PAREA1       479613.782 3742863.599 479530.974 3742864.675
   AREAVERT PAREA1       479530.974 3742911.725 479545.492 3742911.187

** Building Downwash **
   BUILDHGT STCK1          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK1          10.97    10.97    10.97     0.00     0.00     0.00
   BUILDHGT STCK1           0.00     0.00     0.00     0.00     0.00     0.00
   BUILDHGT STCK1          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK1          10.97    10.97    10.97     0.00     0.00     0.00
   BUILDHGT STCK1           0.00     0.00     0.00     0.00     0.00     0.00

   BUILDHGT STCK2           0.00     0.00     0.00     0.00     0.00     0.00
   BUILDHGT STCK2           0.00     0.00     0.00    10.97    10.97    10.97
   BUILDHGT STCK2          10.97    10.97    10.97    10.97    10.97     0.00
   BUILDHGT STCK2           0.00     0.00     0.00     0.00     0.00     0.00
   BUILDHGT STCK2           0.00     0.00     0.00    10.97    10.97    10.97
   BUILDHGT STCK2          10.97    10.97    10.97    10.97    10.97     0.00

   BUILDHGT STCK3           0.00     0.00    10.97    10.97    10.97    10.97
   BUILDHGT STCK3          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK3          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK3           0.00     0.00    10.97    10.97    10.97    10.97
   BUILDHGT STCK3          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK3          10.97    10.97    10.97    10.97    10.97    10.97

   BUILDHGT STCK4          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK4          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK4          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK4          10.97    10.97    10.97    10.97    10.97    10.97
   BUILDHGT STCK4          10.97    10.97    10.97    10.97    10.97    10.97
```

BUILDHGT STCK4	10.97	10.97	10.97	10.97	10.97	10.97
BUILDHGT STCK5	10.97	10.97	10.97	10.97	10.97	10.97
BUILDHGT STCK5	10.97	10.97	10.97	10.97	10.97	10.97
BUILDHGT STCK5	10.97	10.97	10.97	10.97	10.97	10.97
BUILDHGT STCK5	10.97	10.97	10.97	10.97	10.97	10.97
BUILDHGT STCK5	10.97	10.97	10.97	10.97	10.97	10.97
BUILDHGT STCK5	10.97	10.97	10.97	10.97	10.97	10.97
BUILDHGT STCK6	10.97	10.97	10.97	10.97	10.97	10.97
BUILDHGT STCK6	10.97	10.97	10.97	10.97	10.97	10.97
BUILDHGT STCK6	10.97	10.97	10.97	10.97	10.97	10.97
BUILDHGT STCK6	10.97	10.97	10.97	10.97	10.97	10.97
BUILDHGT STCK6	10.97	10.97	10.97	10.97	10.97	10.97
BUILDHGT STCK6	10.97	10.97	10.97	10.97	10.97	10.97
BUILDWID STCK1	126.83	161.07	190.42	213.98	231.04	241.08
BUILDWID STCK1	243.80	239.11	229.94	0.00	0.00	0.00
BUILDWID STCK1	0.00	0.00	0.00	0.00	0.00	0.00
BUILDWID STCK1	126.83	161.07	190.42	213.98	231.04	241.08
BUILDWID STCK1	243.80	239.11	229.94	0.00	0.00	0.00
BUILDWID STCK1	0.00	0.00	0.00	0.00	0.00	0.00
BUILDWID STCK2	0.00	0.00	0.00	0.00	0.00	0.00
BUILDWID STCK2	0.00	0.00	0.00	240.65	247.69	247.71
BUILDWID STCK2	240.21	225.41	203.76	175.92	142.73	0.00
BUILDWID STCK2	0.00	0.00	0.00	0.00	0.00	0.00
BUILDWID STCK2	0.00	0.00	0.00	240.65	247.69	247.71
BUILDWID STCK2	240.21	225.41	203.76	175.92	142.73	0.00
BUILDWID STCK3	0.00	0.00	190.42	213.98	231.04	241.08
BUILDWID STCK3	243.80	239.11	229.94	240.65	247.69	247.71
BUILDWID STCK3	240.21	225.41	203.76	175.92	142.73	107.53
BUILDWID STCK3	0.00	0.00	190.42	213.98	231.04	241.08
BUILDWID STCK3	243.80	239.11	229.94	240.65	247.69	247.71
BUILDWID STCK3	240.21	225.41	203.76	175.92	142.73	107.53
BUILDWID STCK4	126.83	161.07	190.42	213.98	231.04	241.08
BUILDWID STCK4	243.80	239.11	229.94	240.65	247.69	247.71
BUILDWID STCK4	240.21	225.41	203.76	175.92	142.73	107.53
BUILDWID STCK4	126.83	161.07	190.42	213.98	231.04	241.08
BUILDWID STCK4	243.80	239.11	229.94	240.65	247.69	247.71
BUILDWID STCK4	240.21	225.41	203.76	175.92	142.73	107.53
BUILDWID STCK5	126.83	161.07	190.42	213.98	231.04	241.08
BUILDWID STCK5	243.80	239.11	229.94	240.65	247.69	247.71
BUILDWID STCK5	240.21	225.41	203.76	175.92	142.73	107.53
BUILDWID STCK5	126.83	161.07	190.42	213.98	231.04	241.08
BUILDWID STCK5	243.80	239.11	229.94	240.65	247.69	247.71
BUILDWID STCK5	240.21	225.41	203.76	175.92	142.73	107.53

```
BUILDWID STCK6          126.83   161.07   190.42   213.98   231.04   241.08
BUILDWID STCK6          243.80   239.11   229.94   240.65   247.69   247.71
BUILDWID STCK6          240.21   225.41   203.76   175.92   142.73   107.53
BUILDWID STCK6          126.83   161.07   190.42   213.98   231.04   241.08
BUILDWID STCK6          243.80   239.11   229.94   240.65   247.69   247.71
BUILDWID STCK6          240.21   225.41   203.76   175.92   142.73   107.53

BUILDLEN STCK1          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK1          175.92   142.73   107.53     0.00     0.00     0.00
BUILDLEN STCK1            0.00     0.00     0.00     0.00     0.00     0.00
BUILDLEN STCK1          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK1          175.92   142.73   107.53     0.00     0.00     0.00
BUILDLEN STCK1            0.00     0.00     0.00     0.00     0.00     0.00

BUILDLEN STCK2            0.00     0.00     0.00     0.00     0.00     0.00
BUILDLEN STCK2            0.00     0.00     0.00   126.83   161.07   190.42
BUILDLEN STCK2          213.98   231.04   241.08   243.80   239.11     0.00
BUILDLEN STCK2            0.00     0.00     0.00     0.00     0.00     0.00
BUILDLEN STCK2            0.00     0.00     0.00   126.83   161.07   190.42
BUILDLEN STCK2          213.98   231.04   241.08   243.80   239.11     0.00

BUILDLEN STCK3            0.00     0.00   247.71   240.21   225.41   203.76
BUILDLEN STCK3          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK3          213.98   231.04   241.08   243.80   239.11   229.94
BUILDLEN STCK3            0.00     0.00   247.71   240.21   225.41   203.76
BUILDLEN STCK3          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK3          213.98   231.04   241.08   243.80   239.11   229.94

BUILDLEN STCK4          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK4          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK4          213.98   231.04   241.08   243.80   239.11   229.94
BUILDLEN STCK4          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK4          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK4          213.98   231.04   241.08   243.80   239.11   229.94

BUILDLEN STCK5          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK5          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK5          213.98   231.04   241.08   243.80   239.11   229.94
BUILDLEN STCK5          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK5          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK5          213.98   231.04   241.08   243.80   239.11   229.94

BUILDLEN STCK6          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK6          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK6          213.98   231.04   241.08   243.80   239.11   229.94
BUILDLEN STCK6          240.65   247.69   247.71   240.21   225.41   203.76
BUILDLEN STCK6          175.92   142.73   107.53   126.83   161.07   190.42
BUILDLEN STCK6          213.98   231.04   241.08   243.80   239.11   229.94

XBADJ    STCK1         -250.34  -259.98  -261.73  -255.52  -241.55  -220.23
XBADJ    STCK1         -192.23  -158.39  -119.73     0.00     0.00     0.00
```

XBADJ	STCK1	0.00	0.00	0.00	0.00	0.00	0.00
XBADJ	STCK1	9.69	12.30	14.02	15.31	16.14	16.47
XBADJ	STCK1	16.31	15.65	12.20	0.00	0.00	0.00
XBADJ	STCK1	0.00	0.00	0.00	0.00	0.00	0.00
XBADJ	STCK2	0.00	0.00	0.00	0.00	0.00	0.00
XBADJ	STCK2	0.00	0.00	0.00	-141.66	-176.81	-206.59
XBADJ	STCK2	-230.09	-246.60	-255.62	-256.87	-250.32	0.00
XBADJ	STCK2	0.00	0.00	0.00	0.00	0.00	0.00
XBADJ	STCK2	0.00	0.00	0.00	14.83	15.74	16.17
XBADJ	STCK2	16.11	15.56	14.54	13.07	11.21	0.00
XBADJ	STCK3	0.00	0.00	-181.48	-160.88	-135.39	-105.79
XBADJ	STCK3	-72.97	-37.94	-1.75	10.31	6.27	2.04
XBADJ	STCK3	-2.25	-6.48	-10.51	-14.22	-17.49	-20.24
XBADJ	STCK3	0.00	0.00	-66.24	-79.33	-90.02	-97.97
XBADJ	STCK3	-102.95	-104.80	-105.78	-137.14	-167.34	-192.46
XBADJ	STCK3	-211.73	-224.56	-230.57	-229.58	-221.61	-209.70
XBADJ	STCK4	-154.23	-147.27	-135.84	-120.27	-101.05	-78.77
XBADJ	STCK4	-54.08	-27.76	-0.59	2.42	-10.43	-22.97
XBADJ	STCK4	-34.81	-45.59	-54.99	-62.71	-68.53	-72.27
XBADJ	STCK4	-86.42	-100.41	-111.88	-119.94	-124.35	-124.99
XBADJ	STCK4	-121.83	-114.97	-106.94	-129.25	-150.63	-167.45
XBADJ	STCK4	-179.17	-185.45	-186.10	-181.09	-170.57	-157.67
XBADJ	STCK5	-111.37	-106.04	-97.49	-85.98	-71.86	-55.56
XBADJ	STCK5	-37.56	-18.43	1.27	-3.25	-23.46	-42.96
XBADJ	STCK5	-61.15	-77.49	-91.47	-102.67	-110.75	-115.47
XBADJ	STCK5	-129.29	-141.65	-150.22	-154.23	-153.55	-148.20
XBADJ	STCK5	-138.36	-124.31	-108.80	-123.58	-137.61	-147.46
XBADJ	STCK5	-152.83	-153.55	-149.61	-141.13	-128.35	-114.47
XBADJ	STCK6	-65.51	-62.41	-57.41	-50.67	-42.39	-32.82
XBADJ	STCK6	-22.25	-11.01	0.57	-12.05	-40.09	-66.91
XBADJ	STCK6	-91.70	-113.71	-132.25	-146.79	-156.86	-162.16
XBADJ	STCK6	-175.14	-185.28	-190.30	-189.54	-183.02	-170.94
XBADJ	STCK6	-153.67	-131.73	-108.10	-114.78	-120.98	-123.51
XBADJ	STCK6	-122.28	-117.34	-108.83	-97.01	-82.25	-67.78
YBADJ	STCK1	38.20	15.66	-7.35	-30.14	-52.01	-72.30
YBADJ	STCK1	-90.40	-105.75	-119.28	0.00	0.00	0.00
YBADJ	STCK1	0.00	0.00	0.00	0.00	0.00	0.00
YBADJ	STCK1	-38.20	-15.66	7.35	30.14	52.01	72.30
YBADJ	STCK1	90.40	105.75	119.28	0.00	0.00	0.00
YBADJ	STCK1	0.00	0.00	0.00	0.00	0.00	0.00
YBADJ	STCK2	0.00	0.00	0.00	0.00	0.00	0.00
YBADJ	STCK2	0.00	0.00	0.00	107.11	90.42	71.25
YBADJ	STCK2	49.92	27.06	3.39	-20.39	-43.55	0.00
YBADJ	STCK2	0.00	0.00	0.00	0.00	0.00	0.00

```
   YBADJ    STCK2            0.00     0.00     0.00  -107.11   -90.42   -71.25
   YBADJ    STCK2          -49.92   -27.06    -3.39    20.39    43.55     0.00

   YBADJ    STCK3            0.00     0.00   -97.25  -104.74  -109.04  -110.03
   YBADJ    STCK3         -107.68  -102.06   -94.73   -85.35   -72.72   -57.62
   YBADJ    STCK3          -40.77   -22.68    -3.91    14.99    33.43    52.02
   YBADJ    STCK3            0.00     0.00    97.25   104.74   109.04   110.03
   YBADJ    STCK3          107.68   102.06    94.73    85.35    72.72    57.62
   YBADJ    STCK3           40.77    22.68     3.91   -14.99   -33.43   -52.02

   YBADJ    STCK4          -65.83   -70.10   -72.24   -72.18   -69.93   -65.55
   YBADJ    STCK4          -59.19   -51.02   -42.70   -33.91   -23.43   -11.98
   YBADJ    STCK4           -0.17    11.65    23.11    33.88    43.61    53.18
   YBADJ    STCK4           65.83    70.10    72.24    72.18    69.93    65.55
   YBADJ    STCK4           59.19    51.02    42.70    33.91    23.43    11.98
   YBADJ    STCK4            0.17   -11.65   -23.11   -33.88   -43.61   -53.18

   YBADJ    STCK5          -60.16   -57.07   -52.25   -45.84   -38.03   -29.07
   YBADJ    STCK5          -19.23    -8.80     0.50     8.96    17.80    26.36
   YBADJ    STCK5           34.12    40.84    46.32    50.40    52.94    55.03
   YBADJ    STCK5           60.16    57.07    52.25    45.84    38.03    29.07
   YBADJ    STCK5           19.23     8.80    -0.50    -8.96   -17.80   -26.36
   YBADJ    STCK5          -34.12   -40.84   -46.32   -50.40   -52.94   -55.03

   YBADJ    STCK6          -51.37   -40.45   -28.30   -15.29    -1.82    11.71
   YBADJ    STCK6           24.89    37.30    47.19    54.82    61.44    66.45
   YBADJ    STCK6           69.44    70.32    69.06    65.71    60.36    54.33
   YBADJ    STCK6           51.37    40.45    28.30    15.29     1.81   -11.71
   YBADJ    STCK6          -24.89   -37.30   -47.19   -54.82   -61.44   -66.45
   YBADJ    STCK6          -69.44   -70.32   -69.06   -65.71   -60.36   -54.33

   URBANSRC ALL
   SRCGROUP ALL
SO FINISHED
**
****************************************
** AERMOD Receptor Pathway
****************************************
**
**
RE STARTING
   INCLUDED "19370 Redlands Avenue West 2nd 14YR.rou"
RE FINISHED
**
****************************************
** AERMOD Meteorology Pathway
****************************************
**
**
ME STARTING
   SURFFILE "E:\New MET data\PERI_V9_ADJU\PERI_v9.SFC"
```

```
   PROFFILE "E:\New MET data\PERI_V9_ADJU\PERI_v9.PFL"
   SURFDATA 3171 2010
   UAIRDATA 3190 2010
   SITEDATA 99999 2010
   PROFBASE 442.0 METERS
ME FINISHED
**
**************************************
** AERMOD Output Pathway
**************************************
**
**
OU STARTING
** Auto-Generated Plotfiles
   PLOTFILE PERIOD ALL "19370 REDLANDS AVENUE WEST 2ND 14YR.AD\PE00GALL.PLT" 31
   SUMMFILE "19370 Redlands Avenue West 2nd 14YR.sum"
OU FINISHED


  *** Message Summary For AERMOD Model Setup ***

  --------- Summary of Total Messages --------

 A Total of            0 Fatal Error Message(s)
 A Total of            8 Warning Message(s)
 A Total of            0 Informational Message(s)


    ******** FATAL ERROR MESSAGES ********
              ***  NONE  ***


    ********   WARNING MESSAGES   ********
 SO W320     290        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
 SO W320     291        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
 SO W320     292        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
 SO W320     293        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
 SO W320     294        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
 SO W320     295        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
 ME W186     719       MEOPEN: THRESH_1MIN 1-min ASOS wind speed threshold used          0.50
 ME W187     719       MEOPEN: ADJ_U* Option for Stable Low Winds used in AERMET

 *********************************
 *** SETUP Finishes Successfully ***
 *********************************


 *** AERMOD - VERSION 22112  ***   *** 19370 Redlands Avenue West  - new site plan                      ***        04/04/23
 *** AERMET - VERSION  16216 ***   *** DPM Conc 2040-53  2nd 14YR                                      ***        19:43:21
                                                                                                                 PAGE   1
 *** MODELOPTs:    RegDFAULT  CONC  ELEV  URBAN  ADJ_U*
```

```
                                        ***     MODEL SETUP OPTIONS SUMMARY       ***
- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - -

** Model Options Selected:
     * Model Uses Regulatory DEFAULT Options
     * Model Is Setup For Calculation of Average CONCentration Values.
     * NO GAS DEPOSITION Data Provided.
     * NO PARTICLE DEPOSITION Data Provided.
     * Model Uses NO DRY DEPLETION. DDPLETE  =  F
     * Model Uses NO WET DEPLETION. WETDPLT  =  F
     * Stack-tip Downwash.
     * Model Accounts for ELEVated Terrain Effects.
     * Use Calms Processing Routine.
     * Use Missing Data Processing Routine.
     * No Exponential Decay.
     * Model Uses URBAN Dispersion Algorithm for the SBL for   179 Source(s),
       for Total of    1 Urban Area(s):
  Urban Population =   2189641.0 ;  Urban Roughness Length =  1.000 m
     * Urban Roughness Length of 1.0 Meter Used.
     * ADJ_U*   - Use ADJ_U* option for SBL in AERMET
     * CCVR_Sub - Meteorological data includes CCVR substitutions
     * TEMP_Sub - Meteorological data includes TEMP substitutions
     * Model Assumes No FLAGPOLE Receptor Heights.
     * The User Specified a Pollutant Type of: DPM

**Model Calculates PERIOD Averages Only

**This Run Includes:    179 Source(s);       1 Source Group(s); and     449 Receptor(s)

               with:      6 POINT(s), including
                          0 POINTCAP(s) and      0 POINTHOR(s)
                and:    172 VOLUME source(s)
                and:      1 AREA type source(s)
                and:      0 LINE source(s)
                and:      0 RLINE/RLINEXT source(s)
                and:      0 OPENPIT source(s)
                and:      0 BUOYANT LINE source(s) with a total of     0 line(s)
                and:      0 SWPOINT source(s)


**Model Set To Continue RUNning After the Setup Testing.

**The AERMET Input Meteorological Data Version Date:  16216

**Output Options Selected:
         Model Outputs Tables of PERIOD Averages by Receptor
         Model Outputs External File(s) of High Values for Plotting (PLOTFILE Keyword)
         Model Outputs Separate Summary File of High Ranked Values (SUMMFILE Keyword)

**NOTE:  The Following Flags May Appear Following CONC Values:  c for Calm Hours
```

```
                                                    m for Missing Hours
                                                    b for Both Calm and Missing Hours

**Misc. Inputs:  Base Elev. for Pot. Temp. Profile (m MSL) =   442.00 ;  Decay Coef. =    0.000     ;  Rot. Angle =     0.0
                 Emission Units = GRAMS/SEC                              ;  Emission Rate Unit Factor =   0.10000E+07
                 Output Units   = MICROGRAMS/M**3

**Approximate Storage Requirements of Model =      3.9 MB of RAM.

**Input Runstream File:          aermod.inp
**Output Print File:             aermod.out

**Detailed Error/Message File:   19370 Redlands Avenue West 2nd 14YR.err
**File for Summary of Results:   19370 Redlands Avenue West 2nd 14YR.sum

*** AERMOD - VERSION 22112  ***   *** 19370 Redlands Avenue West  - new site plan                          ***        04/04/23
*** AERMET - VERSION  16216 ***   *** DPM Conc 2040-53  2nd 14YR                                          ***        19:43:21
                                                                                                                    PAGE   2
*** MODELOPTs:    RegDFAULT  CONC  ELEV  URBAN  ADJ_U*


                                            *** POINT SOURCE DATA ***

             NUMBER EMISSION RATE                    BASE     STACK   STACK    STACK     STACK    BLDG   URBAN  CAP/  EMIS RATE
  SOURCE      PART.  (GRAMS/SEC)     X        Y      ELEV.    HEIGHT  TEMP.   EXIT VEL. DIAMETER  EXISTS SOURCE HOR   SCALAR
    ID        CATS.               (METERS) (METERS) (METERS) (METERS) (DEG.K)  (M/SEC)  (METERS)                       VARY BY
- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - -

STCK1           0   0.10500E-04  479650.5 3743097.5   441.2     3.50   366.00    51.82     0.10    YES     YES   NO
STCK2           0   0.10500E-04  479648.8 3742857.1   441.1     3.50   366.00    51.82     0.10    YES     YES   NO
STCK3           0   0.10500E-04  479532.5 3743073.0   441.9     3.50   366.00    51.82     0.10    YES     YES   NO
STCK4           0   0.10500E-04  479531.4 3743021.0   441.8     3.50   366.00    51.82     0.10    YES     YES   NO
STCK5           0   0.10500E-04  479529.5 3742977.7   441.7     3.50   366.00    51.82     0.10    YES     YES   NO
STCK6           0   0.10500E-04  479530.2 3742931.1   441.7     3.50   366.00    51.82     0.10    YES     YES   NO

*** AERMOD - VERSION 22112  ***   *** 19370 Redlands Avenue West  - new site plan                          ***        04/04/23
*** AERMET - VERSION  16216 ***   *** DPM Conc 2040-53  2nd 14YR                                          ***        19:43:21
                                                                                                                    PAGE   3
*** MODELOPTs:    RegDFAULT  CONC  ELEV  URBAN  ADJ_U*


                                           *** VOLUME SOURCE DATA ***

             NUMBER EMISSION RATE                    BASE    RELEASE    INIT.    INIT.   URBAN  EMISSION RATE
  SOURCE      PART.  (GRAMS/SEC)     X        Y      ELEV.   HEIGHT      SY       SZ     SOURCE  SCALAR VARY
    ID        CATS.               (METERS) (METERS) (METERS) (METERS) (METERS) (METERS)             BY
- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - -

L0000583        0   0.11770E-06  479655.4 3742857.0   441.1     3.50     4.00     5.10     YES
L0000584        0   0.11770E-06  479646.8 3742856.1   441.1     3.50     4.00     5.10     YES
L0000585        0   0.11770E-06  479638.3 3742855.3   441.1     3.50     4.00     5.10     YES
```

```
L0000586        0   0.11770E-06  479629.7 3742854.8   441.1     3.50     4.00     5.10     YES
L0000587        0   0.11770E-06  479621.1 3742854.9   441.1     3.50     4.00     5.10     YES
L0000588        0   0.11770E-06  479612.5 3742855.0   441.1     3.50     4.00     5.10     YES
L0000589        0   0.11770E-06  479603.9 3742855.1   441.2     3.50     4.00     5.10     YES
L0000590        0   0.11770E-06  479595.4 3742855.2   441.3     3.50     4.00     5.10     YES
L0000591        0   0.11770E-06  479586.8 3742855.3   441.4     3.50     4.00     5.10     YES
L0000592        0   0.11770E-06  479578.2 3742855.4   441.6     3.50     4.00     5.10     YES
L0000593        0   0.11770E-06  479569.6 3742855.5   441.7     3.50     4.00     5.10     YES
L0000594        0   0.11770E-06  479561.0 3742855.6   441.7     3.50     4.00     5.10     YES
L0000595        0   0.11770E-06  479552.4 3742855.7   441.8     3.50     4.00     5.10     YES
L0000596        0   0.11770E-06  479543.8 3742855.8   441.8     3.50     4.00     5.10     YES
L0000597        0   0.11770E-06  479535.2 3742855.9   441.8     3.50     4.00     5.10     YES
L0000598        0   0.11770E-06  479526.7 3742856.6   441.8     3.50     4.00     5.10     YES
L0000599        0   0.11770E-06  479519.7 3742859.9   441.8     3.50     4.00     5.10     YES
L0000600        0   0.11770E-06  479516.1 3742867.7   441.8     3.50     4.00     5.10     YES
L0000601        0   0.11770E-06  479512.5 3742875.5   441.9     3.50     4.00     5.10     YES
L0000602        0   0.11770E-06  479508.9 3742883.3   441.9     3.50     4.00     5.10     YES
L0000603        0   0.11770E-06  479505.4 3742891.1   441.8     3.50     4.00     5.10     YES
L0000604        0   0.11770E-06  479501.8 3742898.9   441.8     3.50     4.00     5.10     YES
L0000605        0   0.11770E-06  479498.2 3742906.7   441.8     3.50     4.00     5.10     YES
L0000606        0   0.11770E-06  479494.6 3742914.5   441.8     3.50     4.00     5.10     YES
L0000607        0   0.11770E-06  479491.0 3742922.3   441.8     3.50     4.00     5.10     YES
L0000608        0   0.11770E-06  479487.4 3742930.1   441.9     3.50     4.00     5.10     YES
L0000609        0   0.11770E-06  479483.8 3742937.9   441.9     3.50     4.00     5.10     YES
L0000610        0   0.11770E-06  479480.2 3742945.7   442.0     3.50     4.00     5.10     YES
L0000611        0   0.11770E-06  479476.6 3742953.5   442.0     3.50     4.00     5.10     YES
L0000612        0   0.11770E-06  479473.0 3742961.3   442.0     3.50     4.00     5.10     YES
L0000613        0   0.11770E-06  479470.0 3742969.4   441.9     3.50     4.00     5.10     YES
L0000614        0   0.11770E-06  479467.0 3742977.4   441.9     3.50     4.00     5.10     YES
L0000615        0   0.11770E-06  479464.1 3742985.5   442.0     3.50     4.00     5.10     YES
L0000616        0   0.11770E-06  479461.1 3742993.5   442.0     3.50     4.00     5.10     YES
L0000617        0   0.11770E-06  479458.9 3743001.7   442.0     3.50     4.00     5.10     YES
L0000618        0   0.11770E-06  479459.4 3743010.3   442.1     3.50     4.00     5.10     YES
L0000619        0   0.11770E-06  479459.9 3743018.9   442.1     3.50     4.00     5.10     YES
L0000620        0   0.11770E-06  479460.4 3743027.5   442.2     3.50     4.00     5.10     YES
L0000621        0   0.11770E-06  479460.9 3743036.0   442.2     3.50     4.00     5.10     YES
L0000622        0   0.11770E-06  479462.4 3743044.4   442.1     3.50     4.00     5.10     YES
```


*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** VOLUME SOURCE DATA ***

SOURCE ID	NUMBER PART. CATS.	EMISSION RATE (GRAMS/SEC)	X (METERS)	Y (METERS)	BASE ELEV. (METERS)	RELEASE HEIGHT (METERS)	INIT. SY (METERS)	INIT. SZ (METERS)	URBAN SOURCE	EMISSION RATE SCALAR VARY BY

L0000623	0	0.11770E-06	479464.7	3743052.7	442.1	3.50	4.00	5.10	YES
L0000624	0	0.11770E-06	479467.0	3743061.0	442.0	3.50	4.00	5.10	YES
L0000625	0	0.11770E-06	479469.4	3743069.3	441.9	3.50	4.00	5.10	YES
L0000626	0	0.11770E-06	479474.3	3743075.5	441.9	3.50	4.00	5.10	YES
L0000627	0	0.11770E-06	479481.7	3743079.7	441.9	3.50	4.00	5.10	YES
L0000628	0	0.11770E-06	479489.2	3743084.0	441.9	3.50	4.00	5.10	YES
L0000629	0	0.11770E-06	479496.7	3743088.2	441.8	3.50	4.00	5.10	YES
L0000630	0	0.11770E-06	479504.2	3743092.4	441.7	3.50	4.00	5.10	YES
L0000631	0	0.11770E-06	479512.1	3743095.3	441.7	3.50	4.00	5.10	YES
L0000632	0	0.11770E-06	479520.6	3743096.6	441.6	3.50	4.00	5.10	YES
L0000633	0	0.11770E-06	479529.1	3743097.9	441.6	3.50	4.00	5.10	YES
L0000634	0	0.11770E-06	479537.6	3743099.3	441.5	3.50	4.00	5.10	YES
L0000635	0	0.11770E-06	479546.1	3743100.6	441.4	3.50	4.00	5.10	YES
L0000636	0	0.11770E-06	479554.6	3743100.9	441.4	3.50	4.00	5.10	YES
L0000637	0	0.11770E-06	479563.2	3743100.8	441.4	3.50	4.00	5.10	YES
L0000638	0	0.11770E-06	479571.8	3743100.7	441.3	3.50	4.00	5.10	YES
L0000639	0	0.11770E-06	479580.4	3743100.6	441.3	3.50	4.00	5.10	YES
L0000640	0	0.11770E-06	479589.0	3743100.5	441.3	3.50	4.00	5.10	YES
L0000641	0	0.11770E-06	479597.6	3743100.4	441.2	3.50	4.00	5.10	YES
L0000642	0	0.11770E-06	479606.2	3743100.3	441.2	3.50	4.00	5.10	YES
L0000643	0	0.11770E-06	479614.8	3743100.1	441.2	3.50	4.00	5.10	YES
L0000644	0	0.11770E-06	479623.3	3743100.0	441.2	3.50	4.00	5.10	YES
L0000645	0	0.11770E-06	479631.9	3743099.9	441.2	3.50	4.00	5.10	YES
L0000646	0	0.11770E-06	479640.5	3743099.8	441.2	3.50	4.00	5.10	YES
L0000647	0	0.11770E-06	479649.1	3743099.7	441.2	3.50	4.00	5.10	YES
L0000648	0	0.11770E-06	479657.7	3743099.6	441.2	3.50	4.00	5.10	YES
L0000649	0	0.33390E-07	479669.0	3742861.9	441.1	3.50	4.00	1.63	YES
L0000650	0	0.33390E-07	479669.8	3742870.4	441.1	3.50	4.00	1.63	YES
L0000651	0	0.33390E-07	479670.3	3742879.0	441.1	3.50	4.00	1.63	YES
L0000652	0	0.33390E-07	479670.3	3742887.6	441.1	3.50	4.00	1.63	YES
L0000653	0	0.33390E-07	479670.3	3742896.2	441.1	3.50	4.00	1.63	YES
L0000654	0	0.33390E-07	479670.3	3742904.8	441.1	3.50	4.00	1.63	YES
L0000655	0	0.33390E-07	479670.3	3742913.4	441.1	3.50	4.00	1.63	YES
L0000656	0	0.33390E-07	479670.3	3742921.9	441.1	3.50	4.00	1.63	YES
L0000657	0	0.33390E-07	479670.3	3742930.5	441.1	3.50	4.00	1.63	YES
L0000658	0	0.33390E-07	479670.3	3742939.1	441.0	3.50	4.00	1.63	YES
L0000659	0	0.33390E-07	479670.3	3742947.7	441.0	3.50	4.00	1.63	YES
L0000660	0	0.33390E-07	479670.3	3742956.3	441.0	3.50	4.00	1.63	YES
L0000661	0	0.33390E-07	479670.3	3742964.9	441.0	3.50	4.00	1.63	YES
L0000662	0	0.33390E-07	479670.3	3742973.5	441.0	3.50	4.00	1.63	YES

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** VOLUME SOURCE DATA ***

SOURCE	NUMBER PART.	EMISSION RATE (GRAMS/SEC)	X	Y	BASE ELEV.	RELEASE HEIGHT	INIT. SY	INIT. SZ	URBAN SOURCE	EMISSION RATE SCALAR VARY

ID	CATS.		(METERS)	(METERS)	(METERS)	(METERS)	(METERS)	(METERS)	BY
L0000663	0	0.33390E-07	479670.3	3742982.1	441.1	3.50	4.00	1.63	YES
L0000664	0	0.33390E-07	479670.3	3742990.7	441.1	3.50	4.00	1.63	YES
L0000665	0	0.33390E-07	479670.3	3742999.3	441.1	3.50	4.00	1.63	YES
L0000666	0	0.33390E-07	479670.3	3743007.9	441.2	3.50	4.00	1.63	YES
L0000667	0	0.33390E-07	479670.3	3743016.4	441.2	3.50	4.00	1.63	YES
L0000668	0	0.33390E-07	479670.3	3743025.0	441.2	3.50	4.00	1.63	YES
L0000669	0	0.33390E-07	479670.3	3743033.6	441.3	3.50	4.00	1.63	YES
L0000670	0	0.33390E-07	479670.3	3743042.2	441.3	3.50	4.00	1.63	YES
L0000671	0	0.33390E-07	479670.3	3743050.8	441.3	3.50	4.00	1.63	YES
L0000672	0	0.33390E-07	479670.3	3743059.4	441.4	3.50	4.00	1.63	YES
L0000673	0	0.33390E-07	479670.3	3743068.0	441.4	3.50	4.00	1.63	YES
L0000674	0	0.33390E-07	479670.3	3743076.6	441.3	3.50	4.00	1.63	YES
L0000675	0	0.33390E-07	479670.3	3743085.2	441.3	3.50	4.00	1.63	YES
L0000676	0	0.33390E-07	479670.3	3743093.8	441.2	3.50	4.00	1.63	YES
L0000677	0	0.66670E-07	479670.0	3743107.7	440.9	3.50	4.00	1.63	YES
L0000678	0	0.66670E-07	479669.8	3743116.3	440.6	3.50	4.00	1.63	YES
L0000679	0	0.66670E-07	479669.6	3743124.9	440.3	3.50	4.00	1.63	YES
L0000680	0	0.66670E-07	479669.4	3743133.5	440.3	3.50	4.00	1.63	YES
L0000681	0	0.66670E-07	479669.2	3743142.1	440.5	3.50	4.00	1.63	YES
L0000682	0	0.66670E-07	479669.0	3743150.7	440.8	3.50	4.00	1.63	YES
L0000683	0	0.66670E-07	479668.8	3743159.3	441.0	3.50	4.00	1.63	YES
L0000684	0	0.66670E-07	479668.6	3743167.8	441.0	3.50	4.00	1.63	YES
L0000685	0	0.66670E-07	479668.3	3743176.4	441.0	3.50	4.00	1.63	YES
L0000686	0	0.66670E-07	479668.1	3743185.0	441.0	3.50	4.00	1.63	YES
L0000687	0	0.66670E-07	479667.9	3743193.6	441.1	3.50	4.00	1.63	YES
L0000688	0	0.66670E-07	479667.7	3743202.2	441.2	3.50	4.00	1.63	YES
L0000689	0	0.66670E-07	479667.5	3743210.8	441.2	3.50	4.00	1.63	YES
L0000690	0	0.66670E-07	479667.3	3743219.4	441.3	3.50	4.00	1.63	YES
L0000691	0	0.66670E-07	479667.1	3743228.0	441.3	3.50	4.00	1.63	YES
L0000692	0	0.66670E-07	479666.9	3743236.5	441.3	3.50	4.00	1.63	YES
L0000693	0	0.66670E-07	479666.7	3743245.1	441.3	3.50	4.00	1.63	YES
L0000694	0	0.66670E-07	479666.5	3743253.7	441.3	3.50	4.00	1.63	YES
L0000695	0	0.66670E-07	479666.4	3743262.3	441.2	3.50	4.00	1.63	YES
L0000696	0	0.66670E-07	479666.3	3743270.9	441.2	3.50	4.00	1.63	YES
L0000697	0	0.66670E-07	479666.2	3743279.5	441.1	3.50	4.00	1.63	YES
L0000698	0	0.66670E-07	479666.1	3743288.1	441.0	3.50	4.00	1.63	YES
L0000699	0	0.66670E-07	479666.0	3743296.7	440.8	3.50	4.00	1.63	YES
L0000700	0	0.66670E-07	479665.9	3743305.3	440.7	3.50	4.00	1.63	YES
L0000701	0	0.66670E-07	479665.8	3743313.9	440.6	3.50	4.00	1.63	YES
L0000702	0	0.66670E-07	479665.7	3743322.4	440.6	3.50	4.00	1.63	YES

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** VOLUME SOURCE DATA ***

SOURCE ID	NUMBER PART. CATS.	EMISSION RATE (GRAMS/SEC)	X (METERS)	Y (METERS)	BASE ELEV. (METERS)	RELEASE HEIGHT (METERS)	INIT. SY (METERS)	INIT. SZ (METERS)	URBAN SOURCE	EMISSION RATE SCALAR VARY BY
L0000703	0	0.66670E-07	479665.6	3743331.0	440.7	3.50	4.00	1.63	YES	
L0000704	0	0.66670E-07	479666.0	3743339.6	440.7	3.50	4.00	1.63	YES	
L0000705	0	0.66670E-07	479666.3	3743348.2	440.7	3.50	4.00	1.63	YES	
L0000706	0	0.66670E-07	479666.6	3743356.8	440.7	3.50	4.00	1.63	YES	
L0000707	0	0.66670E-07	479666.9	3743365.4	440.6	3.50	4.00	1.63	YES	
L0000708	0	0.66670E-07	479667.2	3743374.0	440.6	3.50	4.00	1.63	YES	
L0000709	0	0.66670E-07	479667.5	3743382.5	440.4	3.50	4.00	1.63	YES	
L0000710	0	0.66670E-07	479668.7	3743391.0	440.2	3.50	4.00	1.63	YES	
L0000711	0	0.66670E-07	479670.3	3743399.5	440.0	3.50	4.00	1.63	YES	
L0000712	0	0.66670E-07	479671.8	3743407.9	439.8	3.50	4.00	1.63	YES	
L0000713	0	0.66670E-07	479673.3	3743416.4	439.7	3.50	4.00	1.63	YES	
L0000714	0	0.66670E-07	479675.4	3743424.7	439.6	3.50	4.00	1.63	YES	
L0000715	0	0.66670E-07	479677.6	3743433.0	439.5	3.50	4.00	1.63	YES	
L0000716	0	0.66670E-07	479679.8	3743441.3	439.6	3.50	4.00	1.63	YES	
L0000717	0	0.66670E-07	479682.0	3743449.6	439.8	3.50	4.00	1.63	YES	
L0000718	0	0.66670E-07	479684.2	3743457.9	440.1	3.50	4.00	1.63	YES	
L0000719	0	0.66670E-07	479686.4	3743466.2	440.3	3.50	4.00	1.63	YES	
L0000720	0	0.66670E-07	479688.0	3743474.7	440.4	3.50	4.00	1.63	YES	
L0000721	0	0.66670E-07	479689.5	3743483.1	440.4	3.50	4.00	1.63	YES	
L0000722	0	0.66670E-07	479691.0	3743491.6	440.5	3.50	4.00	1.63	YES	
L0000723	0	0.66670E-07	479692.4	3743500.1	440.5	3.50	4.00	1.63	YES	
L0000724	0	0.66670E-07	479693.8	3743508.5	440.5	3.50	4.00	1.63	YES	
L0000725	0	0.66670E-07	479694.8	3743517.1	440.5	3.50	4.00	1.63	YES	
L0000726	0	0.66670E-07	479695.8	3743525.6	440.4	3.50	4.00	1.63	YES	
L0000727	0	0.66670E-07	479696.7	3743534.2	440.4	3.50	4.00	1.63	YES	
L0000728	0	0.66670E-07	479697.7	3743542.7	440.3	3.50	4.00	1.63	YES	
L0000729	0	0.66670E-07	479698.7	3743551.2	440.2	3.50	4.00	1.63	YES	
L0000730	0	0.66670E-07	479699.0	3743559.8	440.2	3.50	4.00	1.63	YES	
L0000731	0	0.66670E-07	479699.3	3743568.4	440.1	3.50	4.00	1.63	YES	
L0000732	0	0.66670E-07	479699.6	3743577.0	440.1	3.50	4.00	1.63	YES	
L0000733	0	0.66670E-07	479699.9	3743585.6	440.1	3.50	4.00	1.63	YES	
L0000734	0	0.66670E-07	479700.2	3743594.2	440.0	3.50	4.00	1.63	YES	
L0000735	0	0.66670E-07	479700.5	3743602.7	439.8	3.50	4.00	1.63	YES	
L0000736	0	0.66670E-07	479700.7	3743611.3	439.7	3.50	4.00	1.63	YES	
L0000737	0	0.66670E-07	479700.6	3743619.9	439.5	3.50	4.00	1.63	YES	
L0000738	0	0.66670E-07	479700.6	3743628.5	439.4	3.50	4.00	1.63	YES	
L0000739	0	0.66670E-07	479700.5	3743637.1	439.4	3.50	4.00	1.63	YES	
L0000740	0	0.66670E-07	479700.5	3743645.7	439.4	3.50	4.00	1.63	YES	
L0000741	0	0.66670E-07	479700.4	3743654.3	439.5	3.50	4.00	1.63	YES	
L0000742	0	0.66670E-07	479700.4	3743662.9	439.9	3.50	4.00	1.63	YES	

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** VOLUME SOURCE DATA ***

SOURCE ID	NUMBER PART. CATS.	EMISSION RATE (GRAMS/SEC)	X (METERS)	Y (METERS)	BASE ELEV. (METERS)	RELEASE HEIGHT (METERS)	INIT. SY (METERS)	INIT. SZ (METERS)	URBAN SOURCE	EMISSION RATE SCALAR VARY BY
L0000743	0	0.66670E-07	479700.3	3743671.5	440.2	3.50	4.00	1.63	YES	
L0000744	0	0.66670E-07	479700.3	3743680.0	440.6	3.50	4.00	1.63	YES	
L0000745	0	0.66670E-07	479700.2	3743688.6	440.7	3.50	4.00	1.63	YES	
L0000746	0	0.66670E-07	479700.1	3743697.2	440.7	3.50	4.00	1.63	YES	
L0000747	0	0.66670E-07	479700.1	3743705.8	440.7	3.50	4.00	1.63	YES	
L0000748	0	0.66670E-07	479700.0	3743714.4	440.7	3.50	4.00	1.63	YES	
L0000749	0	0.66670E-07	479700.0	3743723.0	440.6	3.50	4.00	1.63	YES	
L0000750	0	0.66670E-07	479699.9	3743731.6	440.4	3.50	4.00	1.63	YES	
L0000751	0	0.66670E-07	479699.9	3743740.2	440.3	3.50	4.00	1.63	YES	
L0000752	0	0.66670E-07	479699.8	3743748.8	440.3	3.50	4.00	1.63	YES	
L0000753	0	0.66670E-07	479699.8	3743757.4	440.4	3.50	4.00	1.63	YES	
L0000754	0	0.66670E-07	479699.7	3743766.0	440.6	3.50	4.00	1.63	YES	

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** AREAPOLY SOURCE DATA ***

SOURCE ID	NUMBER PART. CATS.	EMISSION RATE (GRAMS/SEC /METER**2)	LOCATION OF AREA X (METERS)	Y (METERS)	BASE ELEV. (METERS)	RELEASE HEIGHT (METERS)	NUMBER OF VERTS.	INIT. SZ (METERS)	URBAN SOURCE	EMISSION RATE SCALAR VARY BY
PAREA1	0	0.11741E-08	479547.3	3743092.8	441.6	0.91	14	0.00	YES	

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** SOURCE IDs DEFINING SOURCE GROUPS ***

SRCGROUP ID	SOURCE IDs
ALL	STCK1 , STCK2 , STCK3 , STCK4 , STCK5 , STCK6 , L0000583 , L0000584 ,

```
            L0000585    , L0000586    , L0000587    , L0000588    , L0000589    , L0000590    , L0000591    , L0000592    ,
            L0000593    , L0000594    , L0000595    , L0000596    , L0000597    , L0000598    , L0000599    , L0000600    ,
            L0000601    , L0000602    , L0000603    , L0000604    , L0000605    , L0000606    , L0000607    , L0000608    ,
            L0000609    , L0000610    , L0000611    , L0000612    , L0000613    , L0000614    , L0000615    , L0000616    ,
            L0000617    , L0000618    , L0000619    , L0000620    , L0000621    , L0000622    , L0000623    , L0000624    ,
            L0000625    , L0000626    , L0000627    , L0000628    , L0000629    , L0000630    , L0000631    , L0000632    ,
            L0000633    , L0000634    , L0000635    , L0000636    , L0000637    , L0000638    , L0000639    , L0000640    ,
            L0000641    , L0000642    , L0000643    , L0000644    , L0000645    , L0000646    , L0000647    , L0000648    ,
            L0000649    , L0000650    , L0000651    , L0000652    , L0000653    , L0000654    , L0000655    , L0000656    ,
            L0000657    , L0000658    , L0000659    , L0000660    , L0000661    , L0000662    , L0000663    , L0000664    ,
            L0000665    , L0000666    , L0000667    , L0000668    , L0000669    , L0000670    , L0000671    , L0000672    ,
            L0000673    , L0000674    , L0000675    , L0000676    , L0000677    , L0000678    , L0000679    , L0000680    ,
            L0000681    , L0000682    , L0000683    , L0000684    , L0000685    , L0000686    , L0000687    , L0000688    ,
            L0000689    , L0000690    , L0000691    , L0000692    , L0000693    , L0000694    , L0000695    , L0000696    ,
            L0000697    , L0000698    , L0000699    , L0000700    , L0000701    , L0000702    , L0000703    , L0000704    ,
            L0000705    , L0000706    , L0000707    , L0000708    , L0000709    , L0000710    , L0000711    , L0000712    ,
            L0000713    , L0000714    , L0000715    , L0000716    , L0000717    , L0000718    , L0000719    , L0000720    ,
            L0000721    , L0000722    , L0000723    , L0000724    , L0000725    , L0000726    , L0000727    , L0000728    ,
            L0000729    , L0000730    , L0000731    , L0000732    , L0000733    , L0000734    , L0000735    , L0000736    ,
```


*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** SOURCE IDs DEFINING SOURCE GROUPS ***

SRCGROUP ID	SOURCE IDs
	L0000737 , L0000738 , L0000739 , L0000740 , L0000741 , L0000742 , L0000743 , L0000744 ,

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** SOURCE IDs DEFINED AS URBAN SOURCES ***

URBAN ID	URBAN POP	SOURCE IDs
	2189641.	STCK1 , STCK2 , STCK3 , STCK4 , STCK5 , STCK6 , L0000583 , L0000584 ,
		L0000585 , L0000586 , L0000587 , L0000588 , L0000589 , L0000590 , L0000591 , L0000592 ,
		L0000593 , L0000594 , L0000595 , L0000596 , L0000597 , L0000598 , L0000599 , L0000600 ,
		L0000601 , L0000602 , L0000603 , L0000604 , L0000605 , L0000606 , L0000607 , L0000608 ,
		L0000609 , L0000610 , L0000611 , L0000612 , L0000613 , L0000614 , L0000615 , L0000616 ,
		L0000617 , L0000618 , L0000619 , L0000620 , L0000621 , L0000622 , L0000623 , L0000624 ,
		L0000625 , L0000626 , L0000627 , L0000628 , L0000629 , L0000630 , L0000631 , L0000632 ,
		L0000633 , L0000634 , L0000635 , L0000636 , L0000637 , L0000638 , L0000639 , L0000640 ,
		L0000641 , L0000642 , L0000643 , L0000644 , L0000645 , L0000646 , L0000647 , L0000648 ,
		L0000649 , L0000650 , L0000651 , L0000652 , L0000653 , L0000654 , L0000655 , L0000656 ,
		L0000657 , L0000658 , L0000659 , L0000660 , L0000661 , L0000662 , L0000663 , L0000664 ,
		L0000665 , L0000666 , L0000667 , L0000668 , L0000669 , L0000670 , L0000671 , L0000672 ,
		L0000673 , L0000674 , L0000675 , L0000676 , L0000677 , L0000678 , L0000679 , L0000680 ,
		L0000681 , L0000682 , L0000683 , L0000684 , L0000685 , L0000686 , L0000687 , L0000688 ,
		L0000689 , L0000690 , L0000691 , L0000692 , L0000693 , L0000694 , L0000695 , L0000696 ,
		L0000697 , L0000698 , L0000699 , L0000700 , L0000701 , L0000702 , L0000703 , L0000704 ,
		L0000705 , L0000706 , L0000707 , L0000708 , L0000709 , L0000710 , L0000711 , L0000712 ,

L0000713 , L0000714 , L0000715 , L0000716 , L0000717 , L0000718 , L0000719 , L0000720 ,

L0000721 , L0000722 , L0000723 , L0000724 , L0000725 , L0000726 , L0000727 , L0000728 ,

L0000729 , L0000730 , L0000731 , L0000732 , L0000733 , L0000734 , L0000735 , L0000736 ,

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** SOURCE IDs DEFINED AS URBAN SOURCES ***

URBAN ID	URBAN POP	SOURCE IDs

L0000737 , L0000738 , L0000739 , L0000740 , L0000741 , L0000742 , L0000743 , L0000744 ,

L0000745 , L0000746 , L0000747 , L0000748 , L0000749 , L0000750 , L0000751 , L0000752 ,

L0000753 , L0000754 , PAREA1 ,

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** DIRECTION SPECIFIC BUILDING DIMENSIONS ***

SOURCE ID: STCK1

IFV	BH	BW	BL	XADJ	YADJ	IFV	BH	BW	BL	XADJ	YADJ
1	11.0,	126.8,	240.7,	-250.3,	38.2,	2	11.0,	161.1,	247.7,	-260.0,	15.7,
3	11.0,	190.4,	247.7,	-261.7,	-7.3,	4	11.0,	214.0,	240.2,	-255.5,	-30.1,
5	11.0,	231.0,	225.4,	-241.6,	-52.0,	6	11.0,	241.1,	203.8,	-220.2,	-72.3,
7	11.0,	243.8,	175.9,	-192.2,	-90.4,	8	11.0,	239.1,	142.7,	-158.4,	-105.8,
9	11.0,	229.9,	107.5,	-119.7,	-119.3,	10	0.0,	0.0,	0.0,	0.0,	0.0,
11	0.0,	0.0,	0.0,	0.0,	0.0,	12	0.0,	0.0,	0.0,	0.0,	0.0,
13	0.0,	0.0,	0.0,	0.0,	0.0,	14	0.0,	0.0,	0.0,	0.0,	0.0,
15	0.0,	0.0,	0.0,	0.0,	0.0,	16	0.0,	0.0,	0.0,	0.0,	0.0,
17	0.0,	0.0,	0.0,	0.0,	0.0,	18	0.0,	0.0,	0.0,	0.0,	0.0,
19	11.0,	126.8,	240.7,	9.7,	-38.2,	20	11.0,	161.1,	247.7,	12.3,	-15.7,
21	11.0,	190.4,	247.7,	14.0,	7.3,	22	11.0,	214.0,	240.2,	15.3,	30.1,
23	11.0,	231.0,	225.4,	16.1,	52.0,	24	11.0,	241.1,	203.8,	16.5,	72.3,
25	11.0,	243.8,	175.9,	16.3,	90.4,	26	11.0,	239.1,	142.7,	15.7,	105.8,
27	11.0,	229.9,	107.5,	12.2,	119.3,	28	0.0,	0.0,	0.0,	0.0,	0.0,
29	0.0,	0.0,	0.0,	0.0,	0.0,	30	0.0,	0.0,	0.0,	0.0,	0.0,
31	0.0,	0.0,	0.0,	0.0,	0.0,	32	0.0,	0.0,	0.0,	0.0,	0.0,

33	0.0,	0.0,	0.0,	0.0,	0.0,	34	0.0,	0.0,	0.0,	0.0,	0.0,
35	0.0,	0.0,	0.0,	0.0,	0.0,	36	0.0,	0.0,	0.0,	0.0,	0.0,

SOURCE ID: STCK2

IFV	BH	BW	BL	XADJ	YADJ	IFV	BH	BW	BL	XADJ	YADJ
1	0.0,	0.0,	0.0,	0.0,	0.0,	2	0.0,	0.0,	0.0,	0.0,	0.0,
3	0.0,	0.0,	0.0,	0.0,	0.0,	4	0.0,	0.0,	0.0,	0.0,	0.0,
5	0.0,	0.0,	0.0,	0.0,	0.0,	6	0.0,	0.0,	0.0,	0.0,	0.0,
7	0.0,	0.0,	0.0,	0.0,	0.0,	8	0.0,	0.0,	0.0,	0.0,	0.0,
9	0.0,	0.0,	0.0,	0.0,	0.0,	10	11.0,	240.7,	126.8,	-141.7,	107.1,
11	11.0,	247.7,	161.1,	-176.8,	90.4,	12	11.0,	247.7,	190.4,	-206.6,	71.2,
13	11.0,	240.2,	214.0,	-230.1,	49.9,	14	11.0,	225.4,	231.0,	-246.6,	27.1,
15	11.0,	203.8,	241.1,	-255.6,	3.4,	16	11.0,	175.9,	243.8,	-256.9,	-20.4,
17	11.0,	142.7,	239.1,	-250.3,	-43.5,	18	0.0,	0.0,	0.0,	0.0,	0.0,
19	0.0,	0.0,	0.0,	0.0,	0.0,	20	0.0,	0.0,	0.0,	0.0,	0.0,
21	0.0,	0.0,	0.0,	0.0,	0.0,	22	0.0,	0.0,	0.0,	0.0,	0.0,
23	0.0,	0.0,	0.0,	0.0,	0.0,	24	0.0,	0.0,	0.0,	0.0,	0.0,
25	0.0,	0.0,	0.0,	0.0,	0.0,	26	0.0,	0.0,	0.0,	0.0,	0.0,
27	0.0,	0.0,	0.0,	0.0,	0.0,	28	11.0,	240.7,	126.8,	14.8,	-107.1,
29	11.0,	247.7,	161.1,	15.7,	-90.4,	30	11.0,	247.7,	190.4,	16.2,	-71.2,
31	11.0,	240.2,	214.0,	16.1,	-49.9,	32	11.0,	225.4,	231.0,	15.6,	-27.1,
33	11.0,	203.8,	241.1,	14.5,	-3.4,	34	11.0,	175.9,	243.8,	13.1,	20.4,
35	11.0,	142.7,	239.1,	11.2,	43.5,	36	0.0,	0.0,	0.0,	0.0,	0.0,

SOURCE ID: STCK3

IFV	BH	BW	BL	XADJ	YADJ	IFV	BH	BW	BL	XADJ	YADJ
1	0.0,	0.0,	0.0,	0.0,	0.0,	2	0.0,	0.0,	0.0,	0.0,	0.0,
3	11.0,	190.4,	247.7,	-181.5,	-97.2,	4	11.0,	214.0,	240.2,	-160.9,	-104.7,
5	11.0,	231.0,	225.4,	-135.4,	-109.0,	6	11.0,	241.1,	203.8,	-105.8,	-110.0,
7	11.0,	243.8,	175.9,	-73.0,	-107.7,	8	11.0,	239.1,	142.7,	-37.9,	-102.1,
9	11.0,	229.9,	107.5,	-1.8,	-94.7,	10	11.0,	240.7,	126.8,	10.3,	-85.3,
11	11.0,	247.7,	161.1,	6.3,	-72.7,	12	11.0,	247.7,	190.4,	2.0,	-57.6,
13	11.0,	240.2,	214.0,	-2.2,	-40.8,	14	11.0,	225.4,	231.0,	-6.5,	-22.7,
15	11.0,	203.8,	241.1,	-10.5,	-3.9,	16	11.0,	175.9,	243.8,	-14.2,	15.0,
17	11.0,	142.7,	239.1,	-17.5,	33.4,	18	11.0,	107.5,	229.9,	-20.2,	52.0,
19	0.0,	0.0,	0.0,	0.0,	0.0,	20	0.0,	0.0,	0.0,	0.0,	0.0,
21	11.0,	190.4,	247.7,	-66.2,	97.2,	22	11.0,	214.0,	240.2,	-79.3,	104.7,
23	11.0,	231.0,	225.4,	-90.0,	109.0,	24	11.0,	241.1,	203.8,	-98.0,	110.0,
25	11.0,	243.8,	175.9,	-103.0,	107.7,	26	11.0,	239.1,	142.7,	-104.8,	102.1,
27	11.0,	229.9,	107.5,	-105.8,	94.7,	28	11.0,	240.7,	126.8,	-137.1,	85.3,
29	11.0,	247.7,	161.1,	-167.3,	72.7,	30	11.0,	247.7,	190.4,	-192.5,	57.6,
31	11.0,	240.2,	214.0,	-211.7,	40.8,	32	11.0,	225.4,	231.0,	-224.6,	22.7,
33	11.0,	203.8,	241.1,	-230.6,	3.9,	34	11.0,	175.9,	243.8,	-229.6,	-15.0,
35	11.0,	142.7,	239.1,	-221.6,	-33.4,	36	11.0,	107.5,	229.9,	-209.7,	-52.0,

SOURCE ID: STCK4

IFV	BH	BW	BL	XADJ	YADJ	IFV	BH	BW	BL	XADJ	YADJ
1	11.0,	126.8,	240.7,	-154.2,	-65.8,	2	11.0,	161.1,	247.7,	-147.3,	-70.1,

3	11.0,	190.4,	247.7,	-135.8,	-72.2,	4	11.0,	214.0,	240.2,	-120.3,	-72.2,
5	11.0,	231.0,	225.4,	-101.0,	-69.9,	6	11.0,	241.1,	203.8,	-78.8,	-65.5,
7	11.0,	243.8,	175.9,	-54.1,	-59.2,	8	11.0,	239.1,	142.7,	-27.8,	-51.0,
9	11.0,	229.9,	107.5,	-0.6,	-42.7,	10	11.0,	240.7,	126.8,	2.4,	-33.9,
11	11.0,	247.7,	161.1,	-10.4,	-23.4,	12	11.0,	247.7,	190.4,	-23.0,	-12.0,
13	11.0,	240.2,	214.0,	-34.8,	-0.2,	14	11.0,	225.4,	231.0,	-45.6,	11.7,
15	11.0,	203.8,	241.1,	-55.0,	23.1,	16	11.0,	175.9,	243.8,	-62.7,	33.9,
17	11.0,	142.7,	239.1,	-68.5,	43.6,	18	11.0,	107.5,	229.9,	-72.3,	53.2,
19	11.0,	126.8,	240.7,	-86.4,	65.8,	20	11.0,	161.1,	247.7,	-100.4,	70.1,
21	11.0,	190.4,	247.7,	-111.9,	72.2,	22	11.0,	214.0,	240.2,	-119.9,	72.2,
23	11.0,	231.0,	225.4,	-124.3,	69.9,	24	11.0,	241.1,	203.8,	-125.0,	65.5,
25	11.0,	243.8,	175.9,	-121.8,	59.2,	26	11.0,	239.1,	142.7,	-115.0,	51.0,
27	11.0,	229.9,	107.5,	-106.9,	42.7,	28	11.0,	240.7,	126.8,	-129.2,	33.9,
29	11.0,	247.7,	161.1,	-150.6,	23.4,	30	11.0,	247.7,	190.4,	-167.5,	12.0,
31	11.0,	240.2,	214.0,	-179.2,	0.2,	32	11.0,	225.4,	231.0,	-185.5,	-11.7,
33	11.0,	203.8,	241.1,	-186.1,	-23.1,	34	11.0,	175.9,	243.8,	-181.1,	-33.9,
35	11.0,	142.7,	239.1,	-170.6,	-43.6,	36	11.0,	107.5,	229.9,	-157.7,	-53.2,

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** DIRECTION SPECIFIC BUILDING DIMENSIONS ***

SOURCE ID: STCK5

IFV	BH	BW	BL	XADJ	YADJ	IFV	BH	BW	BL	XADJ	YADJ
1	11.0,	126.8,	240.7,	-111.4,	-60.2,	2	11.0,	161.1,	247.7,	-106.0,	-57.1,
3	11.0,	190.4,	247.7,	-97.5,	-52.2,	4	11.0,	214.0,	240.2,	-86.0,	-45.8,
5	11.0,	231.0,	225.4,	-71.9,	-38.0,	6	11.0,	241.1,	203.8,	-55.6,	-29.1,
7	11.0,	243.8,	175.9,	-37.6,	-19.2,	8	11.0,	239.1,	142.7,	-18.4,	-8.8,
9	11.0,	229.9,	107.5,	1.3,	0.5,	10	11.0,	240.7,	126.8,	-3.2,	9.0,
11	11.0,	247.7,	161.1,	-23.5,	17.8,	12	11.0,	247.7,	190.4,	-43.0,	26.4,
13	11.0,	240.2,	214.0,	-61.1,	34.1,	14	11.0,	225.4,	231.0,	-77.5,	40.8,
15	11.0,	203.8,	241.1,	-91.5,	46.3,	16	11.0,	175.9,	243.8,	-102.7,	50.4,
17	11.0,	142.7,	239.1,	-110.8,	52.9,	18	11.0,	107.5,	229.9,	-115.5,	55.0,
19	11.0,	126.8,	240.7,	-129.3,	60.2,	20	11.0,	161.1,	247.7,	-141.7,	57.1,
21	11.0,	190.4,	247.7,	-150.2,	52.2,	22	11.0,	214.0,	240.2,	-154.2,	45.8,
23	11.0,	231.0,	225.4,	-153.6,	38.0,	24	11.0,	241.1,	203.8,	-148.2,	29.1,
25	11.0,	243.8,	175.9,	-138.4,	19.2,	26	11.0,	239.1,	142.7,	-124.3,	8.8,
27	11.0,	229.9,	107.5,	-108.8,	-0.5,	28	11.0,	240.7,	126.8,	-123.6,	-9.0,
29	11.0,	247.7,	161.1,	-137.6,	-17.8,	30	11.0,	247.7,	190.4,	-147.5,	-26.4,
31	11.0,	240.2,	214.0,	-152.8,	-34.1,	32	11.0,	225.4,	231.0,	-153.6,	-40.8,
33	11.0,	203.8,	241.1,	-149.6,	-46.3,	34	11.0,	175.9,	243.8,	-141.1,	-50.4,
35	11.0,	142.7,	239.1,	-128.4,	-52.9,	36	11.0,	107.5,	229.9,	-114.5,	-55.0,

SOURCE ID: STCK6

IFV	BH	BW	BL	XADJ	YADJ	IFV	BH	BW	BL	XADJ	YADJ

```
   1   11.0,  126.8,  240.7,  -65.5,  -51.4,      2   11.0,  161.1,  247.7,  -62.4,  -40.4,
   3   11.0,  190.4,  247.7,  -57.4,  -28.3,      4   11.0,  214.0,  240.2,  -50.7,  -15.3,
   5   11.0,  231.0,  225.4,  -42.4,   -1.8,      6   11.0,  241.1,  203.8,  -32.8,   11.7,
   7   11.0,  243.8,  175.9,  -22.2,   24.9,      8   11.0,  239.1,  142.7,  -11.0,   37.3,
   9   11.0,  229.9,  107.5,    0.6,   47.2,     10   11.0,  240.7,  126.8,  -12.1,   54.8,
  11   11.0,  247.7,  161.1,  -40.1,   61.4,     12   11.0,  247.7,  190.4,  -66.9,   66.5,
  13   11.0,  240.2,  214.0,  -91.7,   69.4,     14   11.0,  225.4,  231.0, -113.7,   70.3,
  15   11.0,  203.8,  241.1, -132.2,   69.1,     16   11.0,  175.9,  243.8, -146.8,   65.7,
  17   11.0,  142.7,  239.1, -156.9,   60.4,     18   11.0,  107.5,  229.9, -162.2,   54.3,
  19   11.0,  126.8,  240.7, -175.1,   51.4,     20   11.0,  161.1,  247.7, -185.3,   40.4,
  21   11.0,  190.4,  247.7, -190.3,   28.3,     22   11.0,  214.0,  240.2, -189.5,   15.3,
  23   11.0,  231.0,  225.4, -183.0,    1.8,     24   11.0,  241.1,  203.8, -170.9,  -11.7,
  25   11.0,  243.8,  175.9, -153.7,  -24.9,     26   11.0,  239.1,  142.7, -131.7,  -37.3,
  27   11.0,  229.9,  107.5, -108.1,  -47.2,     28   11.0,  240.7,  126.8, -114.8,  -54.8,
  29   11.0,  247.7,  161.1, -121.0,  -61.4,     30   11.0,  247.7,  190.4, -123.5,  -66.5,
  31   11.0,  240.2,  214.0, -122.3,  -69.4,     32   11.0,  225.4,  231.0, -117.3,  -70.3,
  33   11.0,  203.8,  241.1, -108.8,  -69.1,     34   11.0,  175.9,  243.8,  -97.0,  -65.7,
  35   11.0,  142.7,  239.1,  -82.2,  -60.4,     36   11.0,  107.5,  229.9,  -67.8,  -54.3,

*** AERMOD - VERSION 22112  ***   *** 19370 Redlands Avenue West  - new site plan                          ***        04/04/23
*** AERMET - VERSION  16216 ***   *** DPM Conc 2040-53  2nd 14YR                                         ***        19:43:21
                                                                                                                  PAGE  15
*** MODELOPTs:    RegDFAULT  CONC  ELEV  URBAN  ADJ_U*

                                    *** GRIDDED RECEPTOR NETWORK SUMMARY ***

                                  *** NETWORK ID: UCART1   ;  NETWORK TYPE: GRIDCART ***

                                        *** X-COORDINATES OF GRID ***
                                                  (METERS)

     479286.7,  479311.7,  479336.7,  479361.7,  479386.7,  479411.7,  479436.7,  479461.7,  479486.7,  479511.7,
     479536.7,  479561.7,  479586.7,  479611.7,  479636.7,  479661.7,  479686.7,  479711.7,  479736.7,  479761.7,
     479786.7,

                                        *** Y-COORDINATES OF GRID ***
                                                  (METERS)

    3742719.1, 3742744.1, 3742769.1, 3742794.1, 3742819.1, 3742844.1, 3742869.1, 3742894.1, 3742919.1, 3742944.1,
    3742969.1, 3742994.1, 3743019.1, 3743044.1, 3743069.1, 3743094.1, 3743119.1, 3743144.1, 3743169.1, 3743194.1,
    3743219.1,

*** AERMOD - VERSION 22112  ***   *** 19370 Redlands Avenue West  - new site plan                          ***        04/04/23
*** AERMET - VERSION  16216 ***   *** DPM Conc 2040-53  2nd 14YR                                         ***        19:43:21
                                                                                                                  PAGE  16
*** MODELOPTs:    RegDFAULT  CONC  ELEV  URBAN  ADJ_U*

                                  *** NETWORK ID: UCART1   ;  NETWORK TYPE: GRIDCART ***

                                      * ELEVATION HEIGHTS IN METERS *
```

Y-COORD (METERS)	X-COORD (METERS)								
	479286.72	479311.72	479336.72	479361.72	479386.72	479411.72	479436.72	479461.72	479486.72
3743219.09	442.70	442.70	442.50	442.20	442.10	441.90	441.50	441.10	441.10
3743194.09	442.70	442.60	442.60	442.50	442.20	442.10	441.80	441.30	441.10
3743169.09	442.60	442.50	442.50	442.40	442.30	442.20	442.00	441.60	441.20
3743144.09	442.60	442.50	442.50	442.40	442.30	442.20	442.10	441.90	441.40
3743119.09	442.60	442.60	442.50	442.40	442.40	442.30	442.10	442.00	441.60
3743094.09	442.60	442.60	442.50	442.50	442.40	442.30	442.10	442.00	441.80
3743069.09	442.50	442.40	442.40	442.30	442.20	442.10	442.10	442.00	441.90
3743044.09	442.60	442.50	442.50	442.40	442.30	442.20	442.20	442.10	442.00
3743019.09	442.60	442.50	442.40	442.30	442.20	442.20	442.20	442.10	441.90
3742994.09	442.60	442.40	442.30	442.20	442.20	442.10	442.00	442.00	441.90
3742969.09	442.50	442.40	442.30	442.20	442.20	442.10	442.00	442.00	441.90
3742944.09	442.60	442.40	442.30	442.30	442.20	442.10	442.10	442.00	442.00
3742919.09	442.40	442.20	442.20	442.10	442.00	442.00	441.90	441.80	441.80
3742894.09	442.40	442.30	442.20	442.10	442.10	442.00	442.00	441.90	441.90
3742869.09	442.40	442.30	442.20	442.20	442.20	442.10	442.10	442.00	441.90
3742844.09	442.30	442.10	442.10	442.20	442.20	442.10	442.10	442.00	441.80
3742819.09	442.10	441.70	441.80	442.10	442.00	441.80	441.90	441.90	441.60
3742794.09	442.00	441.60	441.70	442.00	441.90	441.70	441.60	441.60	441.40
3742769.09	441.90	441.50	441.70	441.90	441.80	441.60	441.60	441.70	441.50
3742744.09	441.80	441.40	441.50	441.80	441.70	441.50	441.50	441.50	441.40
3742719.09	441.60	441.30	441.40	441.70	441.60	441.30	441.20	441.20	441.10

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

* ELEVATION HEIGHTS IN METERS *

Y-COORD (METERS)	X-COORD (METERS)								
	479511.72	479536.72	479561.72	479586.72	479611.72	479636.72	479661.72	479686.72	479711.72
3743219.09	441.20	441.30	441.40	441.40	441.40	441.40	441.30	441.30	441.20
3743194.09	441.00	441.00	441.10	441.20	441.20	441.20	441.10	441.10	441.00
3743169.09	441.00	441.00	441.00	441.10	441.10	441.10	441.00	441.00	441.00
3743144.09	440.80	440.60	440.60	440.60	440.60	440.60	440.60	440.60	440.70
3743119.09	441.00	440.70	440.60	440.60	440.60	440.50	440.50	440.50	440.60
3743094.09	441.70	441.60	441.50	441.40	441.30	441.30	441.20	441.20	441.20
3743069.09	442.00	442.00	441.80	441.60	441.50	441.40	441.40	441.30	441.30
3743044.09	441.90	441.90	441.80	441.60	441.40	441.40	441.30	441.30	441.20
3743019.09	441.80	441.80	441.70	441.50	441.40	441.30	441.20	441.20	441.10
3742994.09	441.80	441.70	441.70	441.50	441.30	441.20	441.10	441.00	441.00
3742969.09	441.80	441.70	441.60	441.50	441.30	441.20	441.10	441.00	440.90

```
 3742944.09 |        441.90       441.70       441.50       441.40       441.30       441.20       441.10       441.00       440.90
 3742919.09 |        441.70       441.60       441.50       441.40       441.40       441.30       441.10       441.00       441.00
 3742894.09 |        441.80       441.70       441.50       441.40       441.40       441.30       441.20       441.10       441.00
 3742869.09 |        441.80       441.80       441.60       441.40       441.30       441.20       441.10       441.00       441.00
 3742844.09 |        441.70       441.70       441.70       441.40       441.00       441.00       441.00       440.90       440.90
 3742819.09 |        441.40       441.40       441.40       441.10       440.70       440.60       440.80       440.80       440.80
 3742794.09 |        441.20       441.10       441.00       440.80       440.60       440.40       440.50       440.70       440.70
 3742769.09 |        441.30       441.20       441.10       441.00       440.80       440.50       440.30       440.50       440.60
 3742744.09 |        441.30       441.10       441.10       441.00       440.80       440.50       440.20       440.20       440.50
 3742719.09 |        441.00       440.90       440.80       440.60       440.50       440.40       440.20       440.00       440.20

*** AERMOD - VERSION 22112  ***   *** 19370 Redlands Avenue West  - new site plan                      ***        04/04/23
*** AERMET - VERSION  16216 ***   *** DPM Conc 2040-53  2nd 14YR                                      ***        19:43:21
                                                                                                                PAGE  18
*** MODELOPTs:    RegDFAULT  CONC  ELEV  URBAN  ADJ_U*

                              *** NETWORK ID: UCART1   ;  NETWORK TYPE: GRIDCART ***

                                        * ELEVATION HEIGHTS IN METERS *

   Y-COORD  |                                          X-COORD (METERS)
   (METERS) |     479736.72    479761.72    479786.72
- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - -

 3743219.09 |        441.00       440.60       440.60
 3743194.09 |        440.90       440.70       440.70
 3743169.09 |        440.90       440.70       440.80
 3743144.09 |        440.80       440.90       440.90
 3743119.09 |        440.80       441.00       441.00
 3743094.09 |        441.20       441.20       441.10
 3743069.09 |        441.20       441.20       441.00
 3743044.09 |        441.10       441.10       440.90
 3743019.09 |        441.00       441.00       440.80
 3742994.09 |        440.90       440.80       440.70
 3742969.09 |        440.80       440.70       440.60
 3742944.09 |        440.80       440.70       440.60
 3742919.09 |        440.80       440.80       440.70
 3742894.09 |        440.90       440.80       440.70
 3742869.09 |        440.90       440.80       440.70
 3742844.09 |        440.80       440.80       440.70
 3742819.09 |        440.70       440.60       440.60
 3742794.09 |        440.60       440.50       440.50
 3742769.09 |        440.60       440.50       440.40
 3742744.09 |        440.50       440.40       440.40
 3742719.09 |        440.40       440.40       440.30

*** AERMOD - VERSION 22112  ***   *** 19370 Redlands Avenue West  - new site plan                      ***        04/04/23
*** AERMET - VERSION  16216 ***   *** DPM Conc 2040-53  2nd 14YR                                      ***        19:43:21
                                                                                                                PAGE  19
*** MODELOPTs:    RegDFAULT  CONC  ELEV  URBAN  ADJ_U*
```

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

* HILL HEIGHT SCALES IN METERS *

Y-COORD (METERS)	X-COORD (METERS)								
	479286.72	479311.72	479336.72	479361.72	479386.72	479411.72	479436.72	479461.72	479486.72
3743219.09	442.70	442.70	442.50	442.20	442.10	441.90	441.50	441.10	441.10
3743194.09	442.70	442.60	442.60	442.50	442.20	442.10	441.80	441.30	441.10
3743169.09	442.60	442.50	442.50	442.40	442.30	442.20	442.00	441.60	441.20
3743144.09	442.60	442.50	442.50	442.40	442.30	442.20	442.10	441.90	441.40
3743119.09	442.60	442.60	442.50	442.40	442.40	442.30	442.10	442.00	441.60
3743094.09	442.60	442.60	442.50	442.50	442.40	442.30	442.10	442.00	441.80
3743069.09	442.50	442.40	442.40	442.30	442.20	442.10	442.10	442.00	441.90
3743044.09	442.60	442.50	442.50	442.40	442.30	442.20	442.20	442.10	442.00
3743019.09	442.60	442.50	442.40	442.30	442.20	442.20	442.20	442.10	441.90
3742994.09	442.60	442.40	442.30	442.20	442.20	442.10	442.00	442.00	441.90
3742969.09	442.50	442.40	442.30	442.20	442.20	442.10	442.00	442.00	441.90
3742944.09	442.60	442.40	442.30	442.30	442.20	442.10	442.10	442.00	442.00
3742919.09	442.40	442.20	442.20	442.10	442.00	442.00	441.90	441.80	441.80
3742894.09	442.40	442.30	442.20	442.10	442.10	442.00	442.00	441.90	441.90
3742869.09	442.40	442.30	442.20	442.20	442.20	442.10	442.10	442.00	441.90
3742844.09	442.30	442.10	442.10	442.20	442.20	442.10	442.10	442.00	441.80
3742819.09	442.10	441.70	441.80	442.10	442.00	441.80	441.90	441.90	441.60
3742794.09	442.00	441.60	441.70	442.00	441.90	441.70	441.60	441.60	441.40
3742769.09	441.90	441.50	441.70	441.90	441.80	441.60	441.60	441.70	441.50
3742744.09	441.80	441.40	441.50	441.80	441.70	441.50	441.50	441.50	441.40
3742719.09	441.60	441.30	441.40	441.70	441.60	441.30	441.20	441.20	441.10

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

* HILL HEIGHT SCALES IN METERS *

Y-COORD (METERS)	X-COORD (METERS)								
	479511.72	479536.72	479561.72	479586.72	479611.72	479636.72	479661.72	479686.72	479711.72
3743219.09	441.20	441.30	441.40	441.40	441.40	441.40	441.30	441.30	441.20
3743194.09	441.00	441.00	441.10	441.20	441.20	441.20	441.10	441.10	441.00
3743169.09	441.00	441.00	441.00	441.10	441.10	441.10	441.00	441.00	441.00
3743144.09	440.80	440.60	440.60	440.60	440.60	440.60	440.60	440.60	440.70
3743119.09	441.00	440.70	440.60	440.60	440.60	440.50	440.50	440.50	440.60
3743094.09	441.70	441.60	441.50	441.40	441.30	441.30	441.20	441.20	441.20
3743069.09	442.00	442.00	441.80	441.60	441.50	441.40	441.40	441.30	441.30
3743044.09	441.90	441.90	441.80	441.60	441.40	441.40	441.30	441.30	441.20

3743019.09	441.80	441.80	441.70	441.50	441.40	441.30	441.20	441.20	441.10
3742994.09	441.80	441.70	441.70	441.50	441.30	441.20	441.10	441.00	441.00
3742969.09	441.80	441.70	441.60	441.50	441.30	441.20	441.10	441.00	440.90
3742944.09	441.90	441.70	441.50	441.40	441.30	441.20	441.10	441.00	440.90
3742919.09	441.70	441.60	441.50	441.40	441.40	441.30	441.10	441.00	441.00
3742894.09	441.80	441.70	441.50	441.40	441.40	441.30	441.20	441.10	441.00
3742869.09	441.80	441.80	441.60	441.40	441.30	441.20	441.10	441.00	441.00
3742844.09	441.70	441.70	441.70	441.40	441.00	441.00	441.00	440.90	440.90
3742819.09	441.40	441.40	441.40	441.10	440.70	440.60	440.80	440.80	440.80
3742794.09	441.20	441.10	441.00	440.80	440.60	440.40	440.50	440.70	440.70
3742769.09	441.30	441.20	441.10	441.00	440.80	440.50	440.30	440.50	440.60
3742744.09	441.30	441.10	441.10	441.00	440.80	440.50	440.20	440.20	440.50
3742719.09	441.00	440.90	440.80	440.60	440.50	440.40	440.20	440.00	440.20

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

* HILL HEIGHT SCALES IN METERS *

Y-COORD (METERS)	X-COORD (METERS) 479736.72	479761.72	479786.72
3743219.09	441.00	440.60	440.60
3743194.09	440.90	440.70	440.70
3743169.09	440.90	440.70	440.80
3743144.09	440.80	440.90	440.90
3743119.09	440.80	441.00	441.00
3743094.09	441.20	441.20	441.10
3743069.09	441.20	441.20	441.00
3743044.09	441.10	441.10	440.90
3743019.09	441.00	441.00	440.80
3742994.09	440.90	440.80	440.70
3742969.09	440.80	440.70	440.60
3742944.09	440.80	440.70	440.60
3742919.09	440.80	440.80	440.70
3742894.09	440.90	440.80	440.70
3742869.09	440.90	440.80	440.70
3742844.09	440.80	440.80	440.70
3742819.09	440.70	440.60	440.60
3742794.09	440.60	440.50	440.50
3742769.09	440.60	440.50	440.40
3742744.09	440.50	440.40	440.40
3742719.09	440.40	440.40	440.30

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** DISCRETE CARTESIAN RECEPTORS ***
(X-COORD, Y-COORD, ZELEV, ZHILL, ZFLAG)
(METERS)

(	479365.8,	3743082.3,	442.4,	442.4,	0.0);	(	479387.2,	3743034.2,	442.3,	442.3,	0.0);
(	479424.4,	3742962.4,	442.1,	442.1,	0.0);	(	479458.5,	3742888.6,	441.9,	441.9,	0.0);
(	479491.7,	3742826.1,	441.6,	441.6,	0.0);	(	479707.3,	3742739.3,	440.4,	440.4,	0.0);
(	479568.5,	3743368.4,	440.7,	440.7,	0.0);	(	479517.3,	3743358.8,	441.1,	441.1,	0.0);

*** AERMOD - VERSION 22112 *** *** 19370 Redlands Avenue West - new site plan *** 04/04/23
*** AERMET - VERSION 16216 *** *** DPM Conc 2040-53 2nd 14YR *** 19:43:21

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

* SOURCE-RECEPTOR COMBINATIONS FOR WHICH CALCULATIONS MAY NOT BE PERFORMED *
LESS THAN 1.0 METER; WITHIN OPENPIT; OR BEYOND 80KM FOR FASTAREA/FASTALL

SOURCE ID	- - RECEPTOR LOCATION - - XR (METERS)	YR (METERS)	DISTANCE (METERS)
L0000600	479511.7	3742869.1	-3.98
L0000601	479511.7	3742869.1	-2.15
L0000603	479511.7	3742894.1	-1.57
L0000606	479486.7	3742919.1	0.50
L0000607	479486.7	3742919.1	-3.25
L0000609	479486.7	3742944.1	-1.78
L0000610	479486.7	3742944.1	-1.89
L0000613	479461.7	3742969.1	-0.30
L0000615	479461.7	3742994.1	0.31
L0000616	479461.7	3742994.1	-7.75
L0000617	479461.7	3742994.1	-0.47
L0000618	479461.7	3743019.1	0.48
L0000619	479461.7	3743019.1	-6.77
L0000620	479461.7	3743019.1	-0.12
L0000621	479461.7	3743044.1	-0.50
L0000622	479461.7	3743044.1	-7.84
L0000623	479461.7	3743044.1	0.53
L0000625	479461.7	3743069.1	-0.95
L0000630	479511.7	3743094.1	-0.86
L0000631	479511.7	3743094.1	-7.37
L0000632	479511.7	3743094.1	0.64
L0000633	479536.7	3743094.1	-0.06
L0000634	479536.7	3743094.1	-3.32
L0000637	479561.7	3743094.1	-1.70
L0000639	479586.7	3743094.1	0.47
L0000640	479586.7	3743094.1	-1.82

L0000642	479611.7	3743094.1	-0.31
L0000643	479611.7	3743094.1	-1.83
L0000645	479636.7	3743094.1	-1.07
L0000646	479636.7	3743094.1	-1.74
L0000648	479661.7	3743094.1	-1.82
L0000650	479661.7	3742869.1	-0.45
L0000653	479661.7	3742894.1	0.25
L0000656	479661.7	3742919.1	0.46
L0000659	479661.7	3742944.1	0.74
L0000661	479661.7	3742969.1	0.97
L0000664	479661.7	3742994.1	0.66
L0000667	479661.7	3743019.1	0.40
L0000670	479661.7	3743044.1	0.21
L0000673	479661.7	3743069.1	0.08

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

* SOURCE-RECEPTOR COMBINATIONS FOR WHICH CALCULATIONS MAY NOT BE PERFORMED *
LESS THAN 1.0 METER; WITHIN OPENPIT; OR BEYOND 80KM FOR FASTAREA/FASTALL

SOURCE ID	- - RECEPTOR LOCATION - - XR (METERS)	YR (METERS)	DISTANCE (METERS)
L0000676	479661.7	3743094.1	0.01
L0000678	479661.7	3743119.1	-0.08
L0000681	479661.7	3743144.1	-0.89
L0000684	479661.7	3743169.1	-1.65
L0000687	479661.7	3743194.1	-2.36
L0000690	479661.7	3743219.1	-2.99

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** METEOROLOGICAL DAYS SELECTED FOR PROCESSING ***
(1=YES; 0=NO)

```
1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1  1 1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 1 1 1  1 1 1 1 1
```

NOTE: METEOROLOGICAL DATA ACTUALLY PROCESSED WILL ALSO DEPEND ON WHAT IS INCLUDED IN THE DATA FILE.

*** UPPER BOUND OF FIRST THROUGH FIFTH WIND SPEED CATEGORIES ***
(METERS/SEC)

1.54, 3.09, 5.14, 8.23, 10.80,

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** UP TO THE FIRST 24 HOURS OF METEOROLOGICAL DATA ***

Surface file: E:\New MET data\PERI_V9_ADJU\PERI_v9.SFC Met Version: 16216
Profile file: E:\New MET data\PERI_V9_ADJU\PERI_v9.PFL
Surface format: FREE
Profile format: FREE
Surface station no.: 3171 Upper air station no.: 3190
Name: UNKNOWN Name: UNKNOWN
Year: 2010 Year: 2010

First 24 hours of scalar data

YR	MO	DY	JDY	HR	H0	U*	W*	DT/DZ	ZICNV	ZIMCH	M-O LEN	Z0	BOWEN	ALBEDO	REF WS	WD	HT	REF TA	HT
10	01	01	1	01	-7.9	0.125	-9.000	-9.000	-999.	106.	21.2	0.19	0.61	1.00	1.30	335.	9.1	282.5	5.5
10	01	01	1	02	-3.9	0.088	-9.000	-9.000	-999.	62.	15.1	0.19	0.61	1.00	0.90	142.	9.1	280.9	5.5
10	01	01	1	03	-3.9	0.088	-9.000	-9.000	-999.	62.	15.1	0.19	0.61	1.00	0.90	324.	9.1	280.4	5.5
10	01	01	1	04	-1.3	0.064	-9.000	-9.000	-999.	39.	18.3	0.19	0.61	1.00	0.40	294.	9.1	278.8	5.5
10	01	01	1	05	-3.9	0.088	-9.000	-9.000	-999.	62.	15.0	0.19	0.61	1.00	0.90	205.	9.1	278.1	5.5
10	01	01	1	06	-1.3	0.065	-9.000	-9.000	-999.	39.	18.3	0.19	0.61	1.00	0.40	3.	9.1	277.0	5.5
10	01	01	1	07	-8.0	0.125	-9.000	-9.000	-999.	106.	21.0	0.19	0.61	1.00	1.30	99.	9.1	277.0	5.5
10	01	01	1	08	-3.3	0.086	-9.000	-9.000	-999.	61.	16.8	0.19	0.61	0.54	0.90	319.	9.1	278.8	5.5
10	01	01	1	09	20.1	0.128	0.307	0.010	49.	110.	-9.0	0.19	0.61	0.33	0.90	239.	9.1	284.2	5.5
10	01	01	1	10	56.7	0.087	0.560	0.010	107.	62.	-1.0	0.19	0.61	0.26	0.40	188.	9.1	289.2	5.5
10	01	01	1	11	81.5	0.323	0.867	0.008	277.	441.	-35.9	0.19	0.61	0.23	2.70	310.	9.1	290.9	5.5
10	01	01	1	12	97.1	0.281	1.058	0.008	421.	357.	-19.7	0.19	0.61	0.22	2.20	357.	9.1	293.1	5.5
10	01	01	1	13	92.2	0.279	1.117	0.008	523.	354.	-20.4	0.19	0.61	0.22	2.20	356.	9.1	293.8	5.5
10	01	01	1	14	77.6	0.275	1.102	0.008	595.	347.	-23.2	0.19	0.61	0.23	2.20	50.	9.1	294.2	5.5
10	01	01	1	15	54.9	0.230	1.006	0.008	640.	266.	-19.2	0.19	0.61	0.27	1.80	53.	9.1	293.8	5.5
10	01	01	1	16	12.3	0.206	0.613	0.008	648.	225.	-61.5	0.19	0.61	0.36	1.80	11.	9.1	292.5	5.5
10	01	01	1	17	-3.6	0.087	-9.000	-9.000	-999.	71.	15.6	0.19	0.61	0.64	0.90	351.	9.1	290.4	5.5
10	01	01	1	18	-3.8	0.087	-9.000	-9.000	-999.	62.	15.2	0.19	0.61	1.00	0.90	186.	9.1	287.5	5.5
10	01	01	1	19	-3.8	0.087	-9.000	-9.000	-999.	62.	15.2	0.19	0.61	1.00	0.90	275.	9.1	285.9	5.5
10	01	01	1	20	-1.2	0.064	-9.000	-9.000	-999.	39.	18.1	0.19	0.61	1.00	0.40	181.	9.1	285.4	5.5
10	01	01	1	21	-7.8	0.125	-9.000	-9.000	-999.	106.	21.3	0.19	0.61	1.00	1.30	318.	9.1	284.9	5.5
10	01	01	1	22	-3.8	0.088	-9.000	-9.000	-999.	62.	15.1	0.19	0.61	1.00	0.90	196.	9.1	283.1	5.5
10	01	01	1	23	-3.8	0.088	-9.000	-9.000	-999.	62.	15.1	0.19	0.61	1.00	0.90	330.	9.1	281.4	5.5

```
10 01 01   1 24   -7.9  0.125 -9.000 -9.000 -999.  106.     21.2  0.19   0.61   1.00    1.30  332.    9.1  280.9    5.5


First hour of profile data
YR MO DY HR HEIGHT F  WDIR    WSPD AMB_TMP sigmaA  sigmaW  sigmaV
10 01 01 01    5.5 0 -999.  -99.00   282.6   99.0  -99.00  -99.00
10 01 01 01    9.1 1  335.    1.30  -999.0   99.0  -99.00  -99.00

F indicates top of profile (=1) or below (=0)

*** AERMOD - VERSION 22112  ***   *** 19370 Redlands Avenue West  - new site plan                          ***        04/04/23
*** AERMET - VERSION  16216 ***   *** DPM Conc 2040-53  2nd 14YR                                          ***        19:43:21
                                                                                                                   PAGE  27
*** MODELOPTs:    RegDFAULT  CONC  ELEV  URBAN  ADJ_U*

                          *** THE PERIOD ( 43824 HRS) AVERAGE CONCENTRATION   VALUES FOR SOURCE GROUP: ALL      ***
                              INCLUDING SOURCE(S):     STCK1       , STCK2       , STCK3       , STCK4       , STCK5       ,
               STCK6       , L0000583    , L0000584    , L0000585    , L0000586    , L0000587    , L0000588    , L0000589    ,
               L0000590    , L0000591    , L0000592    , L0000593    , L0000594    , L0000595    , L0000596    , L0000597    ,
               L0000598    , L0000599    , L0000600    , L0000601    , L0000602    , L0000603    , L0000604    ,  . . .      ,

                               *** NETWORK ID: UCART1   ;  NETWORK TYPE: GRIDCART ***

                                    ** CONC OF DPM      IN MICROGRAMS/M**3                        **

   Y-COORD  |                                          X-COORD (METERS)
   (METERS) |     479286.72    479311.72    479336.72    479361.72    479386.72    479411.72    479436.72    479461.72    479486.72
- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - -

 3743219.09 |       0.00101      0.00115      0.00132      0.00151      0.00173      0.00198      0.00223      0.00249      0.00274
 3743194.09 |       0.00102      0.00116      0.00134      0.00155      0.00180      0.00209      0.00240      0.00274      0.00307
 3743169.09 |       0.00102      0.00117      0.00136      0.00159      0.00186      0.00220      0.00258      0.00302      0.00347
 3743144.09 |       0.00102      0.00118      0.00137      0.00162      0.00192      0.00230      0.00278      0.00334      0.00397
 3743119.09 |       0.00102      0.00118      0.00137      0.00163      0.00196      0.00239      0.00299      0.00374      0.00497
 3743094.09 |       0.00101      0.00117      0.00137      0.00163      0.00198      0.00247      0.00326      0.00466      0.00638
 3743069.09 |       0.00101      0.00117      0.00136      0.00163      0.00200      0.00259      0.00362      0.00547      0.00630
 3743044.09 |       0.00100      0.00115      0.00134      0.00161      0.00199      0.00265      0.00387      0.00460      0.00562
 3743019.09 |       0.00098      0.00113      0.00132      0.00158      0.00198      0.00262      0.00385      0.00440      0.00521
 3742994.09 |       0.00096      0.00111      0.00129      0.00154      0.00190      0.00257      0.00355      0.00413      0.00511
 3742969.09 |       0.00095      0.00108      0.00126      0.00149      0.00183      0.00238      0.00330      0.00445      0.00519
 3742944.09 |       0.00092      0.00106      0.00122      0.00142      0.00171      0.00222      0.00289      0.00384      0.00473
 3742919.09 |       0.00091      0.00103      0.00118      0.00136      0.00161      0.00199      0.00263      0.00326      0.00450
 3742894.09 |       0.00088      0.00099      0.00113      0.00129      0.00151      0.00181      0.00233      0.00301      0.00411
 3742869.09 |       0.00085      0.00095      0.00108      0.00122      0.00141      0.00165      0.00202      0.00267      0.00350
 3742844.09 |       0.00081      0.00091      0.00102      0.00115      0.00131      0.00150      0.00176      0.00219      0.00290
 3742819.09 |       0.00078      0.00087      0.00096      0.00107      0.00121      0.00137      0.00158      0.00186      0.00226
 3742794.09 |       0.00074      0.00082      0.00090      0.00100      0.00111      0.00124      0.00141      0.00162      0.00191
 3742769.09 |       0.00070      0.00077      0.00084      0.00093      0.00102      0.00113      0.00126      0.00143      0.00165
 3742744.09 |       0.00066      0.00072      0.00079      0.00086      0.00094      0.00103      0.00114      0.00127      0.00144
 3742719.09 |       0.00063      0.00068      0.00073      0.00079      0.00086      0.00094      0.00103      0.00114      0.00128
```

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** THE PERIOD (43824 HRS) AVERAGE CONCENTRATION VALUES FOR SOURCE GROUP: ALL ***
INCLUDING SOURCE(S): STCK1 , STCK2 , STCK3 , STCK4 , STCK5 ,
STCK6 , L0000583 , L0000584 , L0000585 , L0000586 , L0000587 , L0000588 , L0000589 ,
L0000590 , L0000591 , L0000592 , L0000593 , L0000594 , L0000595 , L0000596 , L0000597 ,
L0000598 , L0000599 , L0000600 , L0000601 , L0000602 , L0000603 , L0000604 , . . . ,

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

** CONC OF DPM IN MICROGRAMS/M**3 **

Y-COORD (METERS)	X-COORD (METERS)								
	479511.72	479536.72	479561.72	479586.72	479611.72	479636.72	479661.72	479686.72	479711.72
3743219.09	0.00294	0.00305	0.00309	0.00306	0.00299	0.00298	0.00331	0.00270	0.00205
3743194.09	0.00336	0.00355	0.00363	0.00360	0.00348	0.00337	0.00358	0.00292	0.00218
3743169.09	0.00390	0.00422	0.00441	0.00442	0.00420	0.00389	0.00389	0.00315	0.00232
3743144.09	0.00460	0.00529	0.00586	0.00590	0.00547	0.00476	0.00424	0.00332	0.00241
3743119.09	0.00605	0.00691	0.00781	0.00767	0.00707	0.00585	0.00481	0.00354	0.00248
3743094.09	0.00655	0.00850	0.01286	0.01283	0.01187	0.00760	0.00485	0.00373	0.00265
3743069.09	0.00652	0.00834	0.01749	0.01839	0.01732	0.01127	0.00537	0.00402	0.00280
3743044.09	0.00645	0.00848	0.01841	0.01953	0.01824	0.01246	0.00548	0.00409	0.00292
3743019.09	0.00636	0.00870	0.01899	0.01991	0.01879	0.01264	0.00557	0.00402	0.00292
3742994.09	0.00625	0.00870	0.01929	0.02026	0.01889	0.01260	0.00564	0.00400	0.00291
3742969.09	0.00621	0.00861	0.01923	0.02030	0.01896	0.01250	0.00567	0.00400	0.00291
3742944.09	0.00597	0.00847	0.01869	0.01983	0.01881	0.01231	0.00563	0.00407	0.00296
3742919.09	0.00605	0.00926	0.01801	0.01910	0.01851	0.01203	0.00559	0.00413	0.00306
3742894.09	0.00581	0.01342	0.01683	0.01774	0.01746	0.01141	0.00556	0.00418	0.00320
3742869.09	0.00489	0.01074	0.01337	0.01404	0.01379	0.00959	0.00573	0.00426	0.00322
3742844.09	0.00401	0.00589	0.00671	0.00738	0.00764	0.00705	0.00548	0.00411	0.00298
3742819.09	0.00294	0.00395	0.00500	0.00572	0.00585	0.00552	0.00471	0.00371	0.00294
3742794.09	0.00230	0.00285	0.00357	0.00411	0.00426	0.00405	0.00380	0.00340	0.00285
3742769.09	0.00193	0.00228	0.00269	0.00306	0.00327	0.00331	0.00322	0.00300	0.00264
3742744.09	0.00166	0.00191	0.00221	0.00249	0.00269	0.00277	0.00275	0.00262	0.00240
3742719.09	0.00144	0.00164	0.00186	0.00208	0.00225	0.00235	0.00236	0.00230	0.00216

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** THE PERIOD (43824 HRS) AVERAGE CONCENTRATION VALUES FOR SOURCE GROUP: ALL ***
INCLUDING SOURCE(S): STCK1 , STCK2 , STCK3 , STCK4 , STCK5 ,
STCK6 , L0000583 , L0000584 , L0000585 , L0000586 , L0000587 , L0000588 , L0000589 ,
L0000590 , L0000591 , L0000592 , L0000593 , L0000594 , L0000595 , L0000596 , L0000597 ,
L0000598 , L0000599 , L0000600 , L0000601 , L0000602 , L0000603 , L0000604 , . . . ,

*** NETWORK ID: UCART1 ; NETWORK TYPE: GRIDCART ***

** CONC OF DPM IN MICROGRAMS/M**3 **

Y-COORD (METERS)	X-COORD (METERS)		
	479736.72	479761.72	479786.72
3743219.09	0.00169	0.00143	0.00123
3743194.09	0.00178	0.00149	0.00128
3743169.09	0.00186	0.00154	0.00131
3743144.09	0.00193	0.00159	0.00134
3743119.09	0.00197	0.00162	0.00137
3743094.09	0.00203	0.00165	0.00139
3743069.09	0.00213	0.00169	0.00141
3743044.09	0.00223	0.00174	0.00143
3743019.09	0.00230	0.00179	0.00146
3742994.09	0.00231	0.00183	0.00149
3742969.09	0.00235	0.00186	0.00152
3742944.09	0.00243	0.00190	0.00155
3742919.09	0.00248	0.00193	0.00158
3742894.09	0.00248	0.00194	0.00160
3742869.09	0.00243	0.00195	0.00162
3742844.09	0.00239	0.00196	0.00164
3742819.09	0.00238	0.00196	0.00164
3742794.09	0.00234	0.00195	0.00164
3742769.09	0.00225	0.00191	0.00162
3742744.09	0.00212	0.00184	0.00159
3742719.09	0.00197	0.00175	0.00153

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** THE PERIOD (43824 HRS) AVERAGE CONCENTRATION VALUES FOR SOURCE GROUP: ALL ***
INCLUDING SOURCE(S): STCK1 , STCK2 , STCK3 , STCK4 , STCK5 ,
STCK6 , L0000583 , L0000584 , L0000585 , L0000586 , L0000587 , L0000588 , L0000589 ,
L0000590 , L0000591 , L0000592 , L0000593 , L0000594 , L0000595 , L0000596 , L0000597 ,
L0000598 , L0000599 , L0000600 , L0000601 , L0000602 , L0000603 , L0000604 , . . . ,

*** DISCRETE CARTESIAN RECEPTOR POINTS ***

** CONC OF DPM IN MICROGRAMS/M**3 **

X-COORD (M)	Y-COORD (M)	CONC	X-COORD (M)	Y-COORD (M)	CONC
479365.78	3743082.33	0.00168	479387.25	3743034.16	0.00199
479424.43	3742962.42	0.00277	479458.46	3742888.59	0.00286
479491.70	3742826.08	0.00255	479707.32	3742739.31	0.00240
479568.49	3743368.43	0.00154	479517.30	3743358.85	0.00160

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** THE SUMMARY OF MAXIMUM PERIOD (43824 HRS) RESULTS ***

** CONC OF DPM IN MICROGRAMS/M**3 **

GROUP ID	AVERAGE CONC	RECEPTOR (XR, YR, ZELEV, ZHILL, ZFLAG)	OF TYPE	NETWORK GRID-ID
ALL	1ST HIGHEST VALUE IS	0.02030 AT (479586.72, 3742969.09, 441.50, 441.50, 0.00)	GC	UCART1
	2ND HIGHEST VALUE IS	0.02026 AT (479586.72, 3742994.09, 441.50, 441.50, 0.00)	GC	UCART1
	3RD HIGHEST VALUE IS	0.01991 AT (479586.72, 3743019.09, 441.50, 441.50, 0.00)	GC	UCART1
	4TH HIGHEST VALUE IS	0.01983 AT (479586.72, 3742944.09, 441.40, 441.40, 0.00)	GC	UCART1
	5TH HIGHEST VALUE IS	0.01953 AT (479586.72, 3743044.09, 441.60, 441.60, 0.00)	GC	UCART1
	6TH HIGHEST VALUE IS	0.01929 AT (479561.72, 3742994.09, 441.70, 441.70, 0.00)	GC	UCART1
	7TH HIGHEST VALUE IS	0.01923 AT (479561.72, 3742969.09, 441.60, 441.60, 0.00)	GC	UCART1
	8TH HIGHEST VALUE IS	0.01910 AT (479586.72, 3742919.09, 441.40, 441.40, 0.00)	GC	UCART1
	9TH HIGHEST VALUE IS	0.01899 AT (479561.72, 3743019.09, 441.70, 441.70, 0.00)	GC	UCART1
	10TH HIGHEST VALUE IS	0.01896 AT (479611.72, 3742969.09, 441.30, 441.30, 0.00)	GC	UCART1

*** RECEPTOR TYPES: GC = GRIDCART
GP = GRIDPOLR
DC = DISCCART
DP = DISCPOLR

*** AERMOD - VERSION 22112 *** *** 19370 Redlands Avenue West - new site plan *** 04/04/23
*** AERMET - VERSION 16216 *** *** DPM Conc 2040-53 2nd 14YR *** 19:43:21

*** MODELOPTs: RegDFAULT CONC ELEV URBAN ADJ_U*

*** Message Summary : AERMOD Model Execution ***

--------- Summary of Total Messages --------

```
A Total of            0 Fatal Error Message(s)
A Total of           10 Warning Message(s)
A Total of         2028 Informational Message(s)

A Total of        43824 Hours Were Processed

A Total of          978 Calm Hours Identified

A Total of         1050 Missing Hours Identified (  2.40 Percent)


   ******** FATAL ERROR MESSAGES ********
             ***  NONE  ***


   ********   WARNING MESSAGES   ********
SO W320     290        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
SO W320     291        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
SO W320     292        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
SO W320     293        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
SO W320     294        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
SO W320     295        PPARM: Input Parameter May Be Out-of-Range for Parameter            VS
ME W186     719       MEOPEN: THRESH_1MIN 1-min ASOS wind speed threshold used          0.50
ME W187     719       MEOPEN: ADJ_U* Option for Stable Low Winds used in AERMET
MX W450   17521       CHKDAT: Record Out of Sequence in Meteorological File at:     14010101
MX W450   17521       CHKDAT: Record Out of Sequence in Meteorological File at:    2 year gap

   ***********************************
   *** AERMOD Finishes Successfully ***
   ***********************************
```

EMFAC2021 for Riverside (SC) PM2.5 Running and Idling Exhaust Averages at bottom of the sheet

Area	Season	Veh	Fuel	MdlYr	Speed (Miles/hr)	2023 (gms/mile)	2024 (gms/mile)	2025 (gms/mile)	2026 (gms/mile)	2027 (gms/mile)	2028 (gms/mile)	2029 (gms/mile)	2030 (gms/mile)	2031 (gms/mile)	2032 (gms/mile)	2033 (gms/mile)	2034 (gms/mile)
Riverside (SC)	*Annual*	*LHDT2*	*DSL*	Aggregated	*0*	0.778842	0.777688	0.777509	0.777544	0.777539	0.77765	0.777228	0.776552	0.772631	0.770784	0.768303	0.765381
Riverside (SC)	Annual	LHDT2	DSL	Aggregated	5	0.072381	0.065732	0.060612	0.056486	0.053235	0.050727	0.048784	0.047295	0.046041	0.04507	0.044345	0.043925
Riverside (SC)	Annual	LHDT2	DSL	Aggregated	10	0.059607	0.054347	0.050289	0.04702	0.044449	0.042473	0.040952	0.039803	0.03887	0.03818	0.037707	0.037493
Riverside (SC)	Annual	LHDT2	DSL	Aggregated	35	0.023739	0.02193	0.020552	0.019459	0.018621	0.017998	0.017541	0.017219	0.016983	0.016838	0.016776	0.01681
Riverside (SC)	*Annual*	*MHDT*	*DSL*	Aggregated	*0*	0.086748	0.07273	0.060303	0.049764	0.041162	0.034359	0.028849	0.024397	0.020752	0.018038	0.015804	0.014045
Riverside (SC)	Annual	MHDT	DSL	Aggregated	5	0.055457	0.047035	0.039388	0.032878	0.027462	0.023065	0.019496	0.016589	0.014187	0.012242	0.010647	0.009378
Riverside (SC)	Annual	MHDT	DSL	Aggregated	10	0.045219	0.038328	0.032074	0.026749	0.022318	0.018721	0.015799	0.013418	0.011449	0.009852	0.008541	0.007498
Riverside (SC)	Annual	MHDT	DSL	Aggregated	35	0.010371	0.008966	0.007687	0.006597	0.005684	0.004945	0.004336	0.003836	0.003412	0.003062	0.002766	0.002529
Riverside (SC)	*Annual*	*HHDT*	*DSL*	Aggregated	*0*	0.016309	0.015375	0.014634	0.013923	0.013343	0.012838	0.012276	0.011792	0.011375	0.011065	0.010815	0.010558
Riverside (SC)	Annual	HHDT	DSL	Aggregated	5	0.014741	0.014315	0.013927	0.013603	0.013294	0.013002	0.012669	0.012344	0.012015	0.011674	0.011385	0.011096
Riverside (SC)	Annual	HHDT	DSL	Aggregated	10	0.012582	0.012166	0.011786	0.011464	0.01116	0.010875	0.010558	0.01025	0.009941	0.009624	0.009354	0.009087
Riverside (SC)	Annual	HHDT	DSL	Aggregated	35	0.008564	0.008261	0.007966	0.00773	0.007515	0.00732	0.007119	0.006927	0.006736	0.006543	0.006372	0.006207

	14 yr 2026-2039 **5 mph**	**14 yr** 2026-2039 **10 mph**	**14 yr** 2026-2039 **35 mph**	**14 yr** 2026-2039 **0 mph (idling)**
LHDT2	0.04654	0.03945	0.01734	0.76899
MHDT	0.01431	0.01154	0.00340	0.02150
HHDT	0.01177	0.00969	0.00658	0.01135

	14 yr 2040-2053 **5 mph**	**14 yr** 2040-2053 **10 mph**	**14 yr** 2040-2053 **35 mph**	**14 yr** 2040-2053 **0 mph (idling)**
LHDT2	0.04099	0.03556	0.01660	0.76156
MHDT	0.00424	0.00328	0.00154	0.00743
HHDT	0.01012	0.00821	0.00565	0.00975

	2 yr 2024-2025 **5 mph**	**2 yr** 2024-2025 **10 mph**	**2 yr** 2024-2025 **35 mph**	**2 yr** 2024-2025 **0 mph (idling)**
LHDT2	0.06317	0.05232	0.02124	0.77760
MHDT	0.04321	0.03520	0.00833	0.06652
HHDT	0.01412	0.01198	0.00811	0.01500

	1 yr 2023 **5 mph**	**1 yr** 2023 **10 mph**	**1 yr** 2023 **35 mph**	**1 yr** 2023 **0 mph (idling)**
LHDT2	0.08144	0.05961	0.02374	0.77884
MHDT	0.06814	0.04522	0.01037	0.08675
HHDT	0.02111	0.01258	0.00856	0.01631

2035 (gms/mile)	2036 (gms/mile)	2037 (gms/mile)	2038 (gms/mile)	2039 (gms/mile)	2040 (gms/mile)	2041 (gms/mile)	2042 (gms/mile)	2043 (gms/mile)	2044 (gms/mile)	2045 (gms/mile)	2046 (gms/mile)	2047 (gms/mile)	2048 (gms/mile)	2049 (gms/mile)	2050 (gms/mile)	2051 (gms/mile)	2052 (gms/mile)	2053 (gms/mile)
0.761339	0.76085	0.760267	0.759676	0.760052	0.760312	0.76051	0.760671	0.760734	0.760987	0.761186	0.761437	0.761606	0.761852	0.762113	0.762615	0.762615	0.762615	0.762615
0.043383	0.043392	0.043222	0.042986	0.042652	0.04245	0.042365	0.042288	0.042276	0.042073	0.041864	0.041578	0.041324	0.040992	0.040285	0.039094	0.039094	0.039094	0.039094
0.037198	0.037256	0.037157	0.036992	0.03675	0.03661	0.036571	0.036535	0.036541	0.036416	0.036276	0.036077	0.035892	0.035652	0.035053	0.034045	0.034045	0.034045	0.034045
0.016819	0.016923	0.016956	0.016952	0.016912	0.016899	0.016917	0.016928	0.016946	0.016919	0.01688	0.016818	0.016754	0.016672	0.016443	0.016063	0.016063	0.016063	0.016063
0.012547	0.011458	0.010595	0.009878	0.009315	0.008763	0.008359	0.007956	0.00768	0.007413	0.007299	0.00721	0.00714	0.007086	0.007051	0.00702	0.00702	0.00702	0.00702
0.008311	0.007445	0.006754	0.006178	0.005742	0.00532	0.005004	0.004692	0.004432	0.004179	0.004103	0.004044	0.003994	0.003966	0.003944	0.003924	0.003924	0.003924	0.003924
0.006618	0.005911	0.005347	0.004876	0.004519	0.004174	0.003915	0.003659	0.003445	0.003237	0.003173	0.003122	0.00308	0.003054	0.003034	0.003016	0.003016	0.003016	0.003016
0.002319	0.002176	0.002058	0.001957	0.001876	0.001799	0.001735	0.001671	0.001614	0.001561	0.001533	0.001508	0.001485	0.001465	0.001449	0.001434	0.001434	0.001434	0.001434
0.010383	0.010261	0.010171	0.010094	0.010026	0.009959	0.009899	0.009857	0.009823	0.009786	0.009754	0.009726	0.009704	0.009687	0.009675	0.009662	0.009662	0.009662	0.009662
0.010891	0.010738	0.011114	0.010545	0.010469	0.010394	0.010324	0.010266	0.01021	0.010152	0.010107	0.010069	0.010038	0.010032	0.010032	0.010031	0.010031	0.010031	0.010031
0.008898	0.008758	0.008661	0.008579	0.00851	0.008443	0.008382	0.00833	0.008282	0.008233	0.008194	0.008161	0.008134	0.008126	0.008124	0.008121	0.008121	0.008121	0.008121
0.006082	0.005994	0.005922	0.005861	0.005811	0.005769	0.005734	0.005705	0.005682	0.005662	0.005647	0.005635	0.005625	0.005616	0.00561	0.005603	0.005603	0.005603	0.005603

GANDDINI GROUP INC.

714.795.3100 | ganddini.com